HORTICULTURAL, IRRIGATION AND LANDSCAPE SUPPLIES

BUYERS' GUIDE 2023 (SYSTEMS)



Welcome to the 2023 Buyers Guide

Sales

Marcus Jackson MBPR(hort)

Key Account Manager & BASIS Advisor T: 01772 817913 M: 07810 794559 marcus.jackson@lssystems.co.uk

Dionne McDonald

Office Sales T: 01772 817926 dionne.mcdonald@lssystems.co.uk

Ben McDonald

Irrigation Sales T: 01772 817933 ben.mcdonald@lssystems.co.uk

Procurement

Purchasing

Procurement & Product Manager T: 01772 817914 purchasing@lssystems.co.uk

Design & Website

Neil Horner

CAD Design & Website T: 01772 817919 neil.horner@lssystems.co.uk

Shop / Collections

Dan Johnston

Shop Manager T: 01772 817921 dan.johnston@lssystems.co.uk

Counter Service

Daniel Rigby & Anthony Ashley

shop@lssystems.co.uk

Nigel Crosby

Technical Field Sales - North West England M: 07872 129327 nigel.crosby@lssystems.co.uk

Tracey Brand

Office Sales - Allotments & Xmas Products T: 01772 817991 tracey.brand@lssystems.co.uk

Mark 'Eddy' Francis

Office Sales T: 01772 817912 mark.francis@lssystems.co.uk

John Crinall

Technical Field Sales - Northumberland, Yorkshire, Humberside, Lincolnshire & Cambridgeshire M: 07590 446384 john.crinall@lssystems.co.uk

Sandra Robinson

Technical Field Sales - North West England & Wales M: 07496 245432 sandra.robinson@lssystems.co.uk

Simon Myerscough

Biological Control, Marketing & IT T: 01772 817915 simon.myerscough@lssystems.co.uk

Office Sales & Product Support

Cora Williams

Office Sales & Product Support T: 01772 817939 cora.williams@lssystems.co.uk

Ann-Marie Taylor

Office Sales & Product Support T: 01772 817923 anne-marie.taylor@lssystems.co.uk

Installation, Projects & Service

Peter McKean

Installation Manager M: 07469 151259 peter.mckean@lssystems.co.uk

Chris Townsend, Ben Holmes, Sam & Nathan Drummond, **Adrian Howarth & Chris Hoare**

Senior Installation Team Members

Goods In

Gary Morris

Goods In Manager gary.morris@lssystems.co.uk

Tim Griffiths

BTLIA Diploma in Turf & Landscape

Irrigation Projects Manager & System Design T: 01772 817916 M: 07712 775524 tim.griffiths@lssystems.co.uk

Warehouse / Stores

Robert Eatough

shop@lssystems.co.uk

Goods Out

Delivery

Cliff Clark, Ian Rigby, **Gary Bamber & David Olsson**

Deliveries

Finance

Ian Land

Financial Controller T: 01772 812484 ian.land@lssystems.co.uk

Sarah Wareing

Management Accountant T: 01772 812484 sarah.wareing@lssystems.co.uk

Company Reg. No. 02329261

VAT No. GB 483 6445 20

Management

Keith Ball MBPR(hort)

keith.ball@lssystems.co.uk

Celanie Ball

Company Secretary celanie.ball@lssystems.co.uk

Darren McDonald MBPR(hort) **BTLIA Diploma in Turf & Landscape**

Managing Director **BASIS Advisor / Turnkey Projects** T: 01772 817917 darren.mcdonald@lssystems.co.uk

Chloe Monk

Finance T: 01772 812484 chloe.monk@lssystems.co.uk

The 2022 Buyers' Guide

How To Place Your Order

Online 24/7:

WWW.LSSYSTEMS.CO.UK

Telephone:

01772812484

Mon-Fri 8am-5pm Sat Closed **Closed Bank Holidays** Our voicemail service is available at all other times.

Email:

SALES@LSSYSTEMS.CO.UK

Email us your order. Please quote the following:

- **Product code**
- Description
- Quantity
- **Contact & delivery information**
- **Payment information**
- Account number (if known)

Post to:

LS Systems Ltd 184 Blackgate Lane **Tarleton** Preston Lancs PR4 6UU

At our Trade Counter:

Call in and collect your goods from our stores. Extensive stocks available, but please call in advance to confirm your item is in stock. Our store is open 6 days a week at the times and address detailed above and you will find landscape products and work/waterproof clothing and boots plus pots and trays, fertilisers and chemicals and horticultural glass and accessories.

Methods of Payment

Account:

Apply for a trading account with us, an application form and details of our terms and conditions can be found in this Buyers Guide. Our terms are nett 28 days from date of invoice.

Credit Card:

Quote your card number, expiry date and security number (and if necessary an issue number or from date) and address when placing your order. We accept the majority of credit and debit cards. Payment by PayPal also accepted.



Delivery Rates

Delivery options available include post, carrier and our own transport.

We will always endeavour to send your order out on the best service.

Delivery charges for delivery by LS vehicles

Area 1

L40 1, PR4 4-6, PR9 8, PR26 6-9 All orders, delivery is £10. Use of forklift will incur an additional charge of £25.

Area 2

BB, BL, FY, L (exc. Local), M, PR (exc. Local), WA, WN All orders, delivery is £15. Use of forklift will incur an additional charge of £25.

Area 3

BD, CH, CW, HD, HX, LA, OL, SK All orders, delivery is £20. Use of forklift will incur an additional charge of £25.

Area 4

CA, DE, LL11-19, 22, 24-34, 48-78, ST, SY1-16, 21, 22, TF All orders, delivery is £20. Use of forklift will incur an additional charge of £25.

Area 5

Rest of UK

Independent carrier rates will be applied. Delivery will be by courier. Heavy loads will be unloaded by customer's forklift or courier tail lift and pallet truck if customer does not have a fork lift.

Scheduled LS delivery days (subject to seasonal change). Next day service, timed delivery and/or booking in will incur additional charges. Deliveries into Clean Air Zones may incur additional charges. Small deliveries which are completion of the same order will not be charged.

MONDAY

TUESDAY CW, DE, SK9-11, ST, SY1-16,21,22, TF, WA1-5,916 WEDNESDAY CH, L (exc. Local), LL11-19,22,24-34,48-78, WA6-8, WN **THURSDAY** BD1-22, BL, HD, HX, M, OL, SK1-8, 12-16, 22, 23

FRIDAY BB, BD23,24, FY, PR (exc. Local) LOCAL (anyday) L40_1, PR4_4-6, PR9_8, PR26_6-9

The Buyers Guide Categories

The bayers datae categories						
POTS, TRAYS & BASKETS	6 - 49					
COMPOST, FERTILISERS & PEST CONTROL	50-79					
LANDSCAPE & AMENITY	80-101					
GLASSHOUSE PARTS & ACCESSORIES	102-113					
POLY, NETTING & CROP COVERS	114-119					
PLANT, MACHINERY & SYSTEMS Air Movement Fans & Gas, Oil & Electric Heaters	120-123					
PACKAGING, TOOLS. LABELS & SUNDRIES	124-131					
IRRIGATION SYSTEMS	132-199					
PUMPING EQUIPMENT	200-215					

DECORATIVE PLANTERS - New!

Tall Square Stone Effect 11"



CODE	SIZE D x H	COLOUR	VOL	PRICE EACH
PAFFGF11SQST	27 x 33	Stone Effect	13.5	£3.00

Gala Tall Round with Black Rim 14"



CODE	SIZE D x H	COLOUR	VOL	PRICE EACH
PAFCTGP14LT	35.5 x 38.1 cm	Lagoon Teal Stone	26.4 L	£5.50
PAFCTGP14WS	35.5 x 38.1 cm	Walnut Stone	26.4 L	£5.50
PAFCTGP14BS	35.5 x 38.1 cm	Burgundy Stone	26.4 L	£5.50

Olive Planter Green



CODE	SIZE D x H	VOL	PRICE EACH
PAFKA180502GN	23 x 23	6	£2.50
PAFKA180503GN	30 x 30	14	£4.30
PAFKA180504GN	40 x 40	34	£9.25

Olive Planter Grey



CODE	SIZE D x H	VOL	PRICE EACH
PAFKA180502GY	23 x 23	6	£2.50
PAFKA180503GY	30 x 30	14	£4.30
PAFKA180504GY	40 x 40	34	£9.25

Baker Planter 15"



CODE	SIZE D x H	COLOUR	VOL	PRICE EACH
PAFCTBAKCW	38 x 30	Ceramic White	22.8	£2.95
PAFCTBAKCCF	38 x 30	Chestnut Chalk Fusion	22.8	£2.95
PAFCTBAKSF	38 x 30	Silver Fusion	22.8	£2.95

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

DECORATIVE CONTAINERS



Ibiza Decorative Pot

The decorative pot is a modern and elegant pot with a special cross-bottom for optimum drainage. For today's growers, the pot has the following characteristics:

perfect fitting on Danish trolleys * easy to use on potting machines * excellent quality/competitive pricing



Yellow	Lime-green	Baby Pin	ik Blue	A	Anthracite		Terracotta		
CODE	DIAMETER	HEIGHT	VOLUME	QTY / SHELF	COLOUR	CASE	PRICE / CASE	PRICE / 1000	PALLET
PBATIBI190TC	19.0 cm	14.7 cm	2.5 L	21	Terracotta	46			4,554
PBATIBI190AN	19.0 cm	14.7 cm	2.5 L	21	Anthracite	46			4,554
PBATIBI190XX	19.0 cm	14.7 cm	2.5 L	21	Colours	46			4,554
PBATIBI210TC	21.0 cm	16.1 cm	3.5 L	18	Terracotta	40			3,000
PBATIBI210AN	21.0 cm	16.1 cm	3.5 L	18	Anthracite	40			3,000
PBATIBI210XX	21.0 cm	16.1 cm	3.5 L	18	Colours	40			3,000
PBATIBI230TC	23.0 cm	17.5 cm	4.3 L	15/17	Terracotta	37			2,553
PBATIBI230AN	23.0 cm	17.5 cm	4.3 L	15/17	Anthracite	37			2,553
PBATIBI230XX	23.0 cm	17.5 cm	4.3 L	15/17	Various	37			2,553
PBATIBI260TC	26.0 cm	20.7 cm	6.5 L	12	Terracotta	30			1,440
PBATIBI260AN	26.0 cm	20.7 cm	6.5 L	12	Anthracite	30			1,440
PBATIBI260XX	26.0 cm	20.7 cm	6.5 L	12	Various	30			1,440
PBATIBI290TC	29.0 cm	29.0 cm	8.6 L	9/10	Terracotta	50			1,400
PBATIBI290AN	29.0 cm	29.0 cm	8.6 L	9/10	Anthracite	50			1,400
PBATIBI290XX	29.0 cm	29.0 cm	8.6 L	9/10	Various	50			1,400
PBATIBI320TC	32.0 cm	25.0 cm	12.4 L		Terracotta	105			945
PBATIBI320AN	32.0 cm	25.0 cm	12.4 L		Anthracite	105			945
PBATIBI320XX	32.0 cm	25.0 cm	12.4 L		Various	105			945

POTS

MODIFORM Pots 5° Ebb and Flow

NIR Detectable Pots (NIR)

The Near Infrared detectable pots are made as much as possible from recycled plastic and sorted by the NIR scanner as PP.

'a recyclable grey pot at the same price as a black pot"



CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	BOX QTY	PRICE / BOX	PRICE / 1000	PALLET QTY
MODP09568RG	9.0 cm	LOW 6.8 cm	0.30 L	R&R Royal Grey	-	Pallet Only		46,800
MODP09587RG	9.0 cm	HIGH 8.7 cm	0.35 L	R&R Royal Grey	-	Pallet Only		45,600
MODP105579RG	10.5 cm	LOW 7.9 cm	0.47 L	R&R Royal Grey	-	Pallet Only		32,224
MODP105590RG	10.5 cm	HIGH 9.0 cm	0.51 L	R&R Royal Grey	-	Pallet Only		30.,952
MODP13596RG	13.0 cm	LOW 9.6 cm	0.88 L	R&R Royal Grey	-	Pallet Only		18,480
MODP135C112RG	13.0 cm	HIGH 11.2 cm	1.00 L	R&R Royal Grey	-	Pallet Only		18,480


TRAYS

Modiform's EcoExpert range is made from paper fibre instead of plastic.



A WAY FOR YOU

Recycled ~ Recyclable ~ Strong ~ Water resistant ~ Retail and customer friendly

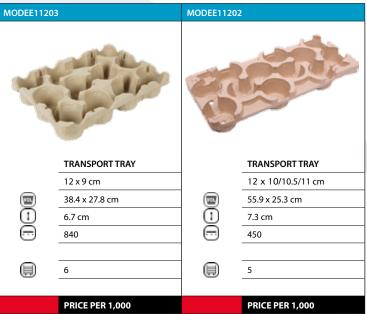



EcoExpert







PRICE PER 1,000

25 mm

PRICE PER 1,000

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

POTS


7 x 14 mm

PRICE PER 1,000

7 x 16 mm

PRICE PER 1,000

from paper fibre instead of plastic.

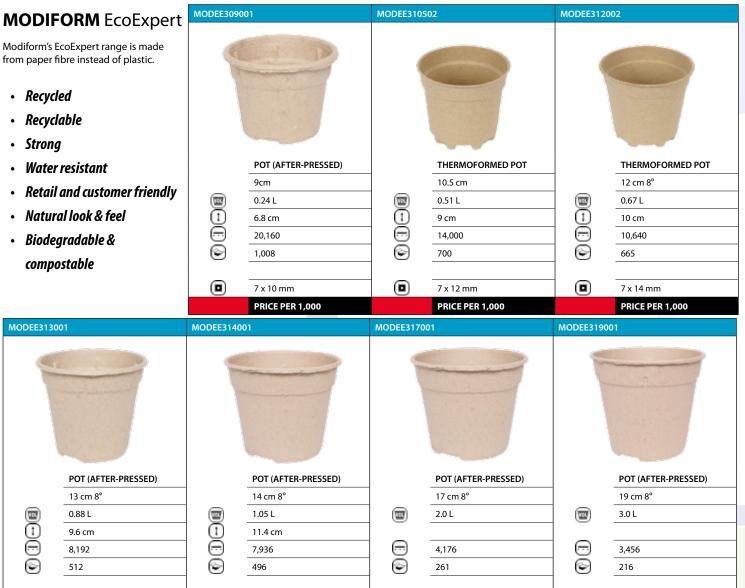

7 x 20 mm

PRICE PER 1,000

7 x 20 mm

PRICE PER 1,000




TRANSPORT TRAYS

MODIFORM Normpack® 400 Series




A WAY FOR YOU

NORMPACK®

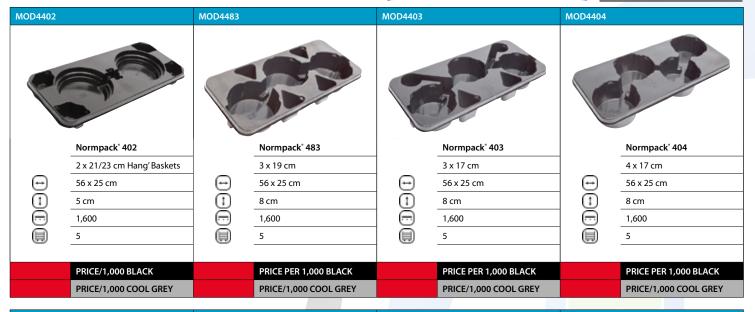



MODIFORM Normpack® 200 Series

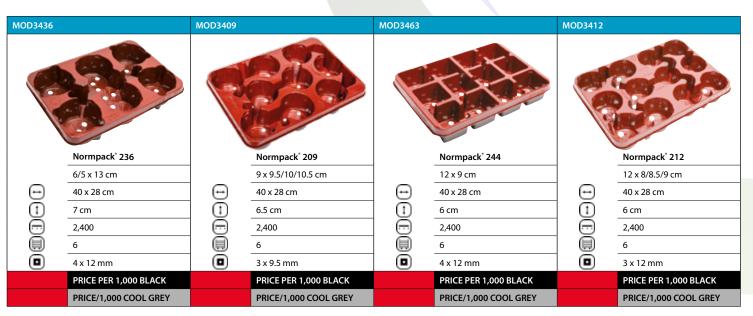

Tray size




TRANSPORT TRAYS

MODIFORM Normpack® 300 Series



NORMPACK®



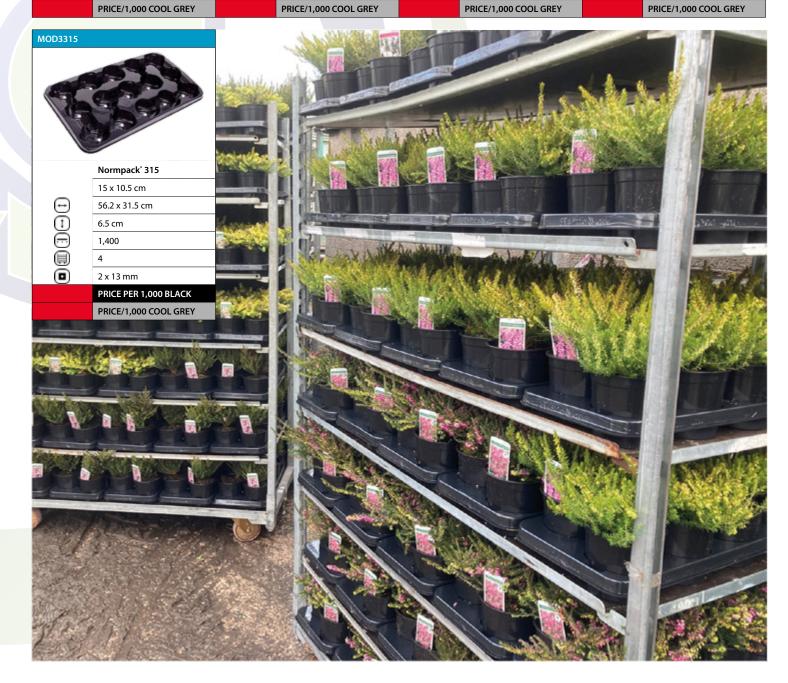

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

TRANSPORT TRAYS

MODIFORM Eurodan





Tray size

TRANSPORT TRAYS

MODIFORM Eurodan











sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

BEDDING PACKS

MODIFORM Direct Planting



A WAY FOR YOU

NEW & IMPROVED: UNIVERSAL BEDDING PACKS

- Available in four different versions: 4, 6, 9 or 12 cells
- Improved slot for plant label
- Roll-up bottom, stronger sides, carrier handle holes
- 20 on a Danish shelf
- Recyclable Transparent Green PET





CARRY HANDLES

Carry Handles





MODIFORM Bedding Packs for Pots









sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

BEDDING PACKS

MODIFORM Bedding Packs



PRICE/1,000 COOL GREY

A WAY FOR YOU











MODIFORM Bedding Packs











ENDPACK 6

28 x 21 cm

4,200

120 12

direct planting 500 cc

2 x 6 mm / 2 x 12 mm

PRICE/1,000 TR. GREEN



ENDPACK 2 x 6

35 x 26 cm

7 (14 single) 16.5 mm / 2 x 8 mm

PRICE/1,000 BLACK

PRICE/1,000 COOL GREY

6.5 cm

3,360

direct planting 296 cc

ENDPACK 8	
direct planting 14	12 cc
28 x 12 cm	
5.5 cm	
11,200	

PRICE/1,000 BLACK



ENDPACK 10	
direct planting 106 cc	
28 x 12 cm	
5.5 cm	
11,200	
400	
20	
2 x 5 mm / 1 x 8 mm	
PRICE/1,000 BLACK	



	CARRIER
	4x 7506/7508/7510
	56 x 25 cm
	5.6 cm
	2,800
	100
	5
ı	PRICE/1.000 BLACK

400 20

2 x 7 mm / 1 x 10 mm

PRICE/1,000 BLACK



MODIFORM Bedding Packs



A WAY FOR YOU



RECYCLABLE TRANSPARENT GREEN PET PACKS




Modifom makes use of 100% recycled transparent green polyethylene terephthalate (PET) that originates from consumer waste. Unlike black packs, the packs made from this type of PET can be detected during the waste treatment process. As a result, the products do not end up in the refuse incinerator and can be recycled.

As the packs have the right composition of materials, colour, and format, the packs are recyclable when disposed of by consumers with their plastic, metal and drinking carton (PMD) waste. In this way, these transparent green PET packs contribute to optimisation of the material cycle loop.




MODIFORM Insert Trays



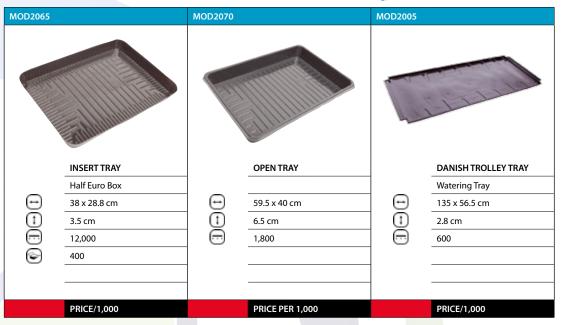

MODIFORM Multi-cell Shuttle Trays for Pots

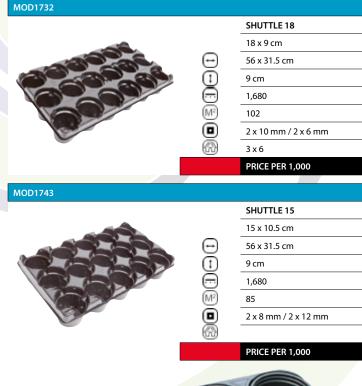





SHUTTLETRAYS 1731 1732 1742 1743

- Improved quality. Stronger trays thanks to robust design and material.
- User friendly. Outstanding in both manual and automated production systems.
- Higher pallet loading. Optimises transport and reduces carbon footprint.
- · Available in both filled or without pots.



PRICE PER 1,000

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

TREE TRAYS

MODIFORM Tree Trays

VERY WIDE SELECTION

The range consists of propagation trays, open trays and box liners.

- Stable and flat design
- Convenient to use on the shop floor
- Suitable for packaging in boxes

Our Tree Trays are 1.0 mm thick as standard.

Also available in 1.5 and 2.1 mm thicknesses - please ask us about prices.






A WAY FOR YOU














PLUG TRAYS

MODIFORM Multi-cell Propagation Trays





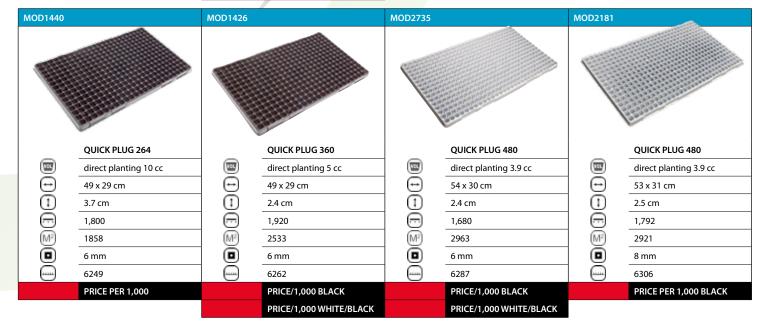

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

TEKU PRINTING AND LABELLING



High Quality Printing & Labelling

TEKU printed pots and containers with promotional printing. Today's ever-changing marketplace requires a barcode on your pot plants. Enhance the value of your product and improve its appearance.

Offset printing process

- Monochrome printing
- Multicolour printing with spot colours
- Photo printing on white pots
- **Action printing**











TEKU Labelling


TEKU round and square pots with standard or custom-made labels.

Standard label is 40 x 24mm, special label 40 x 40mm also available - please phone for

Use your label to include:

- Company name
- Product name
- Barcode
- **End user information**





- Company name,
- Trademark, logo or barcode,
- Branding,
- **Care instructions**

Call for exclusive prices!

TEKU® FLEX+



- Flexible print runs
- Intensive colour saturation
- Photo printing on black and coloured pots
- Finished with special coating





CODE	POT SIZE	POT TYPE	PRICE / 1,000 5,000 up	PRICE / 1,000 25,000 up	PRICE / 1,000 50,000 up
TEKBLSTW10	6 to 10.5cm	round pots			
TEKBLSTW14	11 to 14cm	round pots			
TEKBLSTW17	15 to 17cm	round pots			
TEKBLSTW19	18 to 19cm	round pots			
TEKBLSTW27	20 to 27cm	round pots			
TEKBLSTW11	7x7 to 11x11cm	square pots			
TEKBLSTW15	13x13 to 15x15cm	square pots			
TEKBLSTW16	16x16cm	square pots			
TEKBLSTW18	18.5x18.5cm	square pots			

TEKU TREND COLOURS

Recyclable Round Pots 5° in trend colours

Series VCG (Lightweight)

Trend colours: Blue, Yellow, Light green, Blackberry, Red, Lavender, Pink

and Orange

Circular360: Post Consumer Recycling Material - Household

Waste



CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKVCG090X	9.0 cm	6.8 cm	0.29 L	Trend col/Grey	3,600			48,375
TEKVCG105X	10.5 cm	8.2 cm	0.46 L	Trend col/Grey	2,072			28,215
TEKVCG120X	12.0 cm	9.4 cm	0.69 L	Trend col/Grey	1,449			18,564
TEKVCG130X	13.0 cm	10.2 cm	0.89 L	Trend col/Grey	1,134			14,940
TEKVCG170X	17.0 cm	13.3 cm	2.00 L	Trend col/Grey	540			7,650
TEKVCG190X	19.0 cm	14.9 cm	3.00 L	Trend col/Grey	392			5,250

Recyclable Teku Bowls in trend colours

CLASSIC Series T Bowls (Rigid)

Trend colours: Light green, Yellow, Lavender, Orange, Anthracite,

Blackberry, Orange, Pink and Red

Products are available while supplies last. Trend colours are subject to prior sale.



CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	NET QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKTS170X	17.0 cm	7.4 cm	1.00 L	Light green Yellow	80			10,560
TEKTS200X	20.0 cm	8.7 cm	1.65 L	Lavender Anthracite				5,000
TEKTS230X	23.0 cm	10.0 cm	2.50 L	Blackberry Orange	60			4,320
TEKTS270X	27.0 cm	11.7 cm	4.10 L	Pink Red	50			2,400

Recyclable Containers 5° in trend colours

CLASSIC Series MCI (Rigid)

Trend colours: Lavender, Red, Light green, Yellow, Pink, Blackberry and

Orange



CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	NET QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKMCI170X	17.0 cm	13.3 cm	2.00 L	Trend colours	259			5,180
TEKMCI190X	19.0 cm	14.7 cm	3.00 L	Trend colours	208			4,576
TEKMCI210X	21.0 cm	16.4 cm	4.00 L	Trend colours	70			4,200
TEKMCI230X	23.0 cm	17.9 cm	5.00 L	Trend colours	65			3,510



Circular360 1)

Inline method (Thermoforming)



Circular blue/grey



Circular terracotta/grey



Circular terracotta



Circular taupe/grey



Circular taupe



Circular blackberry/grey



Circular pink/grey



Circular green/grey



Circular red/grey



Circular lavender/grey



Circular white/grey



Circular orange/grey



Circular yellow/grey

Injection moulded



Circular terracotta



Circular taupe



Circular pine green



Circular anthracite



Characteristics:

- ♣ PÖPPELMANN blue®
- Circular Economy / Closed Loop
- 100 % recyclable 5)
 - · NIR detectable
 - · Float-sink method
- Made of
 - Plastic = 100 % PCR HW²
 - · Colour (Masterbatch)
 - Filler
- Certified
- Printable







Ouse of PCR content and heterogeneity of the moter alleads to variations in gloss and colour.

⁴⁾ PCR HW = Post-Congument Respecting Motorial from the recycling bin, recycling bag or other domestic recyclable collections.



Round Pots 5°

PREMIUM Series VCG (Lightweight)

The requirements of modern cultivation methods, our state-of-the-art plastics technology and design as well as our uncompromising demands on quality combine to create this Container Series.

The new multiple hole cross bottom drainage system offers you superior irrigation and soil aeration. The strong rim guarantees outstanding stability and gives you excellent results with potting machines and other automation.

Other sizes available on request: 9.5 / 10.0 / 11.0 / 12.0 / 14.0 / 21.0 / 22.0 cm

See page 23 for special colours

Circular360: Closed Loop / Circular Economy



Wide base for stability

CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKVCG090G	9.0 cm	6.8 cm	0.29 L	Circular Grey	3,600			48,375
TEKVCG100T	10.0 cm	7.9 cm	0.42 L	Terracotta/Grey	2,700			33,858
TEKVCG105G	10.5 cm	8.2 cm	0.46 L	Circular Grey	1,960			28,215
TEKVCG110T	11.0 cm	8.6 cm	0.53 L	Terracotta/Grey	2,212			25,452
TEKVCG120T	12.0 cm	9.4 cm	0.69 L	Terracotta/Grey	1,449			18,564
TEKVCG130G	13.0 cm	10.2 cm	0.89 L	Circular Grey	1,134			14,940
TEKVCG140T	14.0 cm	10.6cm	1.10 L	Terracotta/Grey	990			12,528
TEKVCG150G	15.0 cm	11.5 cm	1.50 L	Circular Grey	854			10,206
TEKVCG170G	17.0 cm	13.3 cm	2.00 L	Circular Grey	540			7,650
TEKVCG190G	19.0 cm	14.9 cm	3.00 L	Circular Grey	392			5,250

Deep Pots 5°

PREMIUM Series VCH (Lightweight)

The strong rim guarantees outstanding stability with this taller pot and gives excellent results with potting machines and other automation.

Circular360: Closed Loop / Circular Economy

Other sizes available on request:

9.0 / 10.0 / 11.0 / 12.0 / 14.0 / 15.0 / 17.0 / 19.0 / 21.0 / 22.0 cm

TEKVCH090F: Extra tall version



Deep Pots

CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKVCH090FG	9.0 cm	9.0 cm	0.37 L	Circular Grey	3,132			42,000
TEKVCH110VG	10.5 cm	9.0 cm	0.51 L	Circular Grey	1,792			19,712
TEKVCH130G	13.0 cm	11.6 cm	1.05 L	Circular Grey	1,080			14,400

Round Pots 6°

CLASSIC Series MXC (Rigid)

A rigid pot from Teku with multi hole profile bottom - the 5.5 cm has normal profile bottom.

Standard colours: all terracotta

Circular360: Post Consumer Recycling Material - Household

Waste



Series MXC Multi-hole profile bottom



Series MXC

TEKU[®]

CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKMXC055T	5.5 cm	5.0 cm	0.08 L	Terracotta	4,200			100,800
TEKMXC090T	9.0 cm	6.8 cm	0.28 L	Terracotta	1,664			52,500
TEKMXC100T	10.0 cm	7.7 cm	0.38 L	Terracotta	1,702			42,180
TEKMXC105T	10.5 cm	7.9 cm	0.44 L	Terracotta	1,430			37,620
TEKMXC110T	11.0 cm	8.4 cm	0.51 L	Terracotta	1,200			30,240
TEKMXC120T	12.0 cm	9.4 cm	0.66 L	Terracotta	756			23,800
TEKMXC130T	13.0 cm	9.9 cm	0.81 L	Terracotta	738			20,400
TEKMXC140T	14.0 cm	10.9 cm	1.05 L	Terracotta	640			17,500

Round Pots 8°

CLASSIC Series TO...D (Rigid)

8° plant pots as required by the modern grower today. Multiple bottom holes for optimum cultivation in all irrigation systems and for efficient handling on potting machines. These round pots type Series TO distinguish themselves by the natural design of a clay pot, yet with all the advantages offered by plastic pots.

Standard colours: all terracotta

Circular360: Post Consumer Recycling Material - Household

Waste



Series TO...D 8 Hole cross bottom



Series TO...Z Multi-hole profile bottom



Series TO...D Multi-hole cross bottom



Series TO...D

CODE	DIAMETER	HEIGHT	VOLUME	BASE	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKMTD050T	5.0 cm	4.1 cm	0.05 L	3-hole	4,795			148,645
TEKMTD060T	6.0 cm	4.6 cm	0.08 L	8-hole cross	3,360			-
TEKMTD070T	7.0 cm	5.4 cm	0.13 L	8-hole cross	3,330			-
TEKMTD080ZT	8.0 cm	6.2 cm	0.19 L	Multi-hole profile	2,592			81,928
TEKMTD095T	9.5 cm	7.3 cm	0.32 L	multi-hole cross	1,952			53,136
TEKMTD150T	15.0 cm	11.4 cm	1.30 L	multi-hole cross	525			17,500

Containers 5°

CLASSIC Series MCI (Rigid)

Standard colours: Black

Circular360: Post Consumer Recycling Material - Household

Waste (Terracotta & Taupe)

TEKMCI190Z: has multi-hole profile bottom.

TEKMCIXXXK*: Label slot







Series MCI Multi-hole star bottom

CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	NET QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKMCI150B	15.0cm	11.7 cm	1.50 L	Black	400			10,710
TEKMCI170B	17.0 cm	13.3 cm	2.00 L	Black	259			8,415
TEKMCI170KB*	17.0 cm	13.3 cm	2.00 L	Black	259			8,568
TEKMCI180B	18.0 cm	14.0 cm	2.50 L	Black	216			7,200
TEKMCI190KB*	19.0 cm	14.7 cm	3.00 L	Black	208			5,900
TEKMCI190ZB	19.0 cm	14.7 cm	3.00 L	Black	208			6,000
TEKMCI210B	21.0 cm	16.4 cm	4.00 L	Black	70			4,200
TEKMCI230B	23.0 cm	17.9 cm	5.00 L	Black	65			3,510
TEKMCI230KB*	23.0 cm	17.9 cm	5.00 L	Black	65			3,510
TEKMCI260B	26.0 cm	21.1 cm	7.50 L	Black	55			2,145
TEKMCI290B	29.0cm	21.8 cm	10.0 L	Black	55			1,815

CLASSIC Series MCD (Rigid)

These containers have a strengthened rim and are resistant against influences of frost.

Standard colours: Black

Post Consumer Recycling Material - Household Circular360:

Waste (Terracotta)



Series MCD Cross bottom with bayonet lock



Series MCD

CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	NET QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKMCD310B	31.0 cm	22.9 cm	12.0 L	Black	30			990
TEKMCD330B	33.0 cm	24.4 cm	14.0 L	Black	30			630
TEKMCD370B	37.0 cm	27.4 cm	20.0 L	Black	20			480
TEKMCD400B	40.0 cm	29.6 cm	25.0 L	Black	20			480
TEKMCD450B	45.0 cm	33.3 cm	35.0 L	Black	11			308
TEKMCD500B	50.0 cm	37.0 cm	47.0 L	Black	10			280

sales@lssystems.co.uk sales: 01772 812484 fax: 01772 815417 www.lssystems.co.uk

TEKU CONTAINERS

CLASSIC Series MCL (Rigid)

New deep container with multi hole star bottom.

Standard colours:

Circular360: Post Consumer Recycling Material - Household

Waste (Terracotta & Taupe)

TEKMCLXXXKC*: Label slot and smooth surface



Series MCL Multi-hole star bottom





CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKMCL130KC*B	13.0 cm	11.3 cm	1.00 L	Black	pallet only	pallet only		13,680
TEKMCL130KC*T	13.0 cm	11.3 cm	1.00 L	Circular Taupe	pallet only	pallet only		13,680
TEKMCL170B	17.0 cm	14.5 cm	2.10 L	Black	pallet only	pallet only		7,920
TEKMCL170T	17.0 cm	14.5 cm	2.10 L	Circular Terracotta	pallet only	pallet only		7,920
TEKMCL190B	19.0 cm	16.7 cm	3.10 L	Black	pallet only	pallet only		5,400
TEKMCL190T	19.0 cm	16.7 cm	3.10 L	Circular Terracotta	pallet only	pallet only		5,400
TEKMCL210B	21.0 cm	18.5 cm	4.30 L	Black	pallet only	pallet only		3,700
TEKMCL210T	21.0 cm	18.5 cm	4.30 L	Circular Terracotta	pallet only	pallet only		3,700
TEKMCL240B	24.0 cm	21.6 cm	6.30 L	Black	pallet only	pallet only		2,520
TEKMCL240T	24.0 cm	21.6 cm	6.30 L	Circular Terracotta	pallet only	pallet only		2,520
TEKMCL270B	27.0 cm	24.3 cm	9.30 L	Black	pallet only	pallet only		1,764
TEKMCL270T	27.0 cm	24.3 cm	9.30 L	Circular Terracotta	pallet only	pallet only		1,764



TEKU CONTAINERS

Orchid Pots & Containers 5°

Recyclable CLASSIC Series MPB, MCO **Phalaenopsis**


Translucent containers ideal for growing orchids.



Series MPB 6 Multi-hole profile bottom



Series MCO Step bottom with support function

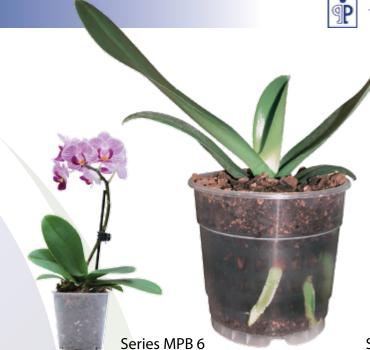

Series MCO

CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / BOX	PRICE / 1000	PALLET QTY
TEKMPB060C	6.0 cm	5.8 cm	0.11 L	Translucent	4,110			115,080
TEKMCO120C	11.4 cm	10.8 cm	0.74 L	Translucent	666			19,000
TEKMCO150C	14.7 cm	12.5 cm	1.30 L	Translucent	385			10,800
TEKMCO170C	17.0 cm	15.0 cm	1.85 L	Translucent	224			7,755

Plant Supports

CLASSIC Series STG (Rigid)

The versions TEKSTG10511, TEKSTG120 and TEKSTG130 feature a new design that requires no clips to fit specific pot sizes in the range 10.5 to 13.0 cm (and TEKVCE140) diameter. With the other versions (TEKSTG170 & TEKSTG190) a mounting ring provides for a perfect fit to pots and containers of the relevant diameters. TEKSTG130B is specifically designed for taller plants.

Trailing and climbing plants will be stabilised by supports and protected against damage.

Standard colours:


green

Tall version Rim Clamping











STG17 & 19

CODE	TO FIT POT DIAMETERS	HEIGHT	UNIT QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKSTG10105	10.0 - 10.5 cm	11.0 cm	810			10,340
TEKSTG11	11.0 cm	11.0 cm	810			10,340
TEKSTG120	12.0 cm (except for TEKMTE130T)	12.0 cm	602			8,100
TEKSTG130R	13.0 cm + TEKVCE140T, TEKMTD140T	14.5 cm	484			6,600
TEKSTG130BR	13.0 cm + TEKVCE140T, TEKMTD140T	17.0 cm	396			6,600
TEKSTG140BR	14.0 cm	17.5 cm	352			6,000
TEKSTG170	17.0 cm (except for TEKMXA170)	15.5 cm	75			3,300
TEKSTG190	19.0 cm	16.5 cm	75			2,700
TEKSTG190Z	For MCI 19Z	16.5 cm	75			2,700

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

TEKU SQUARE POTS

TEKU*

Square Pots

PREMIUM Series VQB (Lightweight Polystyrene)

These pots are anti-statically treated and are suitable for potting machines with magazines. The raised bottom cares for perfect water-lead. They are steadfast vet low in weight.

Standard colours: Black

PCR Recyclable: Natural Grey





Series VQB Cross bottom

Series VQB

CODE	SIZE	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKVQB998	9 x 9 cm	8.0 cm	0.44 L	Black	2,350			30,900
TEKVQB9995	9 x 9 cm	9.5 cm	0.52 L	Black	2,280			29,940

PREMIUM Series VQF (Lightweight Polypropylene)

These pots are same as our square pot series VQB (above) and are formed from Polypropylene offering convincing advantages: They are flexible yet stable, which provides an excellent tensile strength, combined with high efficiency on magazine-fed potting machines.

Standard colours: Black

Circular360: Post Consumer Recycling Material - Household

Waste (Taupe)





Series VQF Profile bottom

Series VQF

CODE	SIZE	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKVQF7765	7 x 7 cm	6.5 cm	0.18 L	Black	4,720			60,146
TEKVQF778	7 x 7 cm	8.0 cm	0.23 L	Black	4,560			59,160
TEKVQF887	8 x 8 cm	7.0 cm	0.29 L	Black	4,200			43,890
TEKVQF888	8 x 8 cm	8.0 cm	0.33 L	Black	4,130			46,020
TEKVQF1111115	11 x 11 cm	11.5 cm	0.98 L	Black	840	£104.87	£124.85	15,840
TEKVQF1111155	11 x 11 cm	15.5 cm	1.25 L	Black	756	£117.98	£156.06	15,048

TEKU SQUARE POTS

Square Pots

CLASSIC Series MQD (Rigid)

Excellent drainage properties, also when growing outside. Series MQD square pots are provided with Teku's taglock system for secure label fixing.

Standard colours: Black

Circular360: Post Consumer Recycling Material - Household

Waste (Taupe)



Series MQD Multi-hole cross bottom



Series MQD

CODE	SIZE	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKMQD9995	9 x 9 cm	9.5 cm	0.49 L	Black	880			26,200
TEKMQD9910	9 x 9 cm	10.0 cm	0.51 L	Black	860			26,208
TEKMQD131313	13 x 13 cm	13.0 cm	1.45 L	Black	396			10,530

CLASSIC Series MQA (Rigid)

Excellent drainage properties, also when growing outside. Series MQA square pots are provided with lateral drainage slits which never block.

These very solid square pots with raised bottom have been proven in the field for many years, especially for perennials.

Standard colours: Black

Circular360: Post Consumer Recycling Material - Household

Waste (Taupe)



Series MQA

CODE	SIZE	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKMQA101011	10 x 10 cm	11.0 cm	0.69 L	Black	667			18,676
TEKMQA151520	15 x 15 cm	20.0 cm	3.50 L	Black	130			8,450

CLASSIC Series MQE & MQF (Rigid)

New Square/Round pot available with taglock system for secure label fixing.

Circular360: Post Consumer Recycling Material - Household

Waste (Taupe)

TEKMQF*: Tall version



Series MQE

CODE	SIZE	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKMQE111111	11 x 11 cm	11.0 cm	1.00 L	Circular Taupe	414			14,784
TEKMQE141414	14 x 14 cm	14.0 cm	2.00 L	Circular Taupe	192			6,600
TEKMQF141422*	14 x 14 cm	22.0 cm	3.00 L	Circular Taupe	220			4,400
TEKMQE161616	16 x 16 cm	16.0 cm	3.00 L	Circular Taupe	128			5,040
TEKMQF1616215*	16 x 16 cm	21.5 cm	4.00 L	Circular Taupe	80			3,640
TEKMQE181820	18.5 x 18.5 cm	20.0 cm	5.00 L	Circular Taupe	104			3,072
TEKMQF181825*	18.5 x 18.5 cm	25.0 cm	6.00 L	Circular Taupe	64			2,208

TEKU BOWLS

TEKU®

Tekucotta Bowls

Recyclable CLASSIC Series VSA (Lightweight)

Attractive appearance with multi-hole profile bottom promotes rapid growth and healthy plants. Wide U-shaped rim allows secure gripping and elevation by lifting and positioning machines.

Standard colours 17&19cm: Standard colours 21&23cm: PCR terracotta/Grey or White/Grey

PCR terracotta or White



Series VSA Multi-hole profile bottom



CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	HANGER	NET QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKVSA170T	17.0 cm	7.6 cm	1.10 L	Terracotta/Grey	MHB 33	740			8,470
TEKVSA170W	17.0 cm	7.6 cm	1.10 L	White/Grey	IVITE 33	740			8,470
TEKVSA190T	19.0 cm	8.7 cm	1.50 L	Terracotta/Grey	MHB 33	584			6,424
TEKVSA190W	19.0 cm	8.7 cm	1.50 L	White/Grey	IVIND 33	584			6,424
TEKVSA210T	21.0 cm	9.5 cm	2.20 L	Terracotta	MHB 33	408			4,488
TEKVSA210W	21.0 cm	9.5 cm	2.20 L	White/Grey	IVITE 33	408			4,488
TEKVSA230T	22.0 cm VOL	10.0 cm	2.50 L	Terracotta	MUD 20	305			3,660
TEKVSA230W	22.0 cm VOL	10.0 cm	2.5 L	White/Grey	MHB 38	305			3,660

Recyclable CLASSIC Series T (Rigid)

These bowls look like terracotta, are named Tekucotta, and are made of plastic.

Standard colours: PCR terracotta

Circular360: Post Consumer Recycling Material - Household

Waste



Series T
9-hole bottom with centre hole



Series T 8-hole bottom



Series T

CODE	DIAMETER	HEIGHT	VOLUME	BASE	NET QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKTS170T	17.0 cm	7.4 cm	1.00 L	9-hole	80			10,560
TEKTS200T	20.0 cm	8.7 cm	1.65 L	8-hole	50			5,000
TEKTS230T	23.0 cm	10.0 cm	2.50 L	8-hole	60			4,320
TEKTS270T	27.0 cm	11.7 cm	4.10 L	8-hole	50			2,400
TEKTS300T	30.0 cm	13.0 cm	5.60 L	8-hole	35			1,925
TEKTS350T	35.0 cm	15.2 cm	9.00 L	8-hole	30			1,050

TEKU DECORATIVE POTS & BASKETS



Decorative Pots

Recyclable Series VDA (Lightweight)

Beautiful pots with distinct weight reductions for economical and ecological advantages.

Circular360:

Post Consumer Recycling Material - Household







Series VDA 19 & 22 Cross bottom

Series VDA

CODE	DIAMETER	HEIGHT	VOLUME	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKVDA170T	17.0 cm	10.7 cm	1.60 L	Terracotta/Grey	580			6,380
TEKVDA170W	17.0 cm	10.7 cm	1.60 L	White/Grey	580			6,380
TEKVDA190T	19.0 cm	12.6 cm	2.50 L	Terracotta/Grey	384			4,224
TEKVDA190W	19.0 cm	12.6 cm	2.50 L	White/Grey	384			4,224
TEKVDA220T	22.0 cm	14.9 cm	3.60 L	Circular Terracotta	252			2,772
TEKVDA220W	22.0 cm	14.9 cm	3.60 L	White/Grey	252			2,772

Decorative Hanging Baskets

Recyclable Series VAA (Lightweight)

The hanging baskets all have single overflow central hole. Available in two colours, all shiny with matching hangers. Prices for hangers (sold separately) on page 34.

Standard colours: Recyclable terracotta/grey or white/grey

Special colours available.

Circular360: Post Consumer Recycling Material - Household





Series VAA Water overflow

Series VAA Hanging Pot

CODE	DIAMETER	HEIGHT	VOL	HANGER	COLOUR	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TeKVAA150T	15.0 cm	10.1 cm	1.15 L	MUD 22	Circular Terracotta	736			8,096
TEKVAA150W	15.0 cm	10.1 cm	1.15 L	MHB 33	White/Grey	736			8,096
TEKVAA170T	17.0 cm	10.7 cm	1.60 L	MUD 22	Terracotta/Grey	576			6,336
TEKVAA170W	17.0 cm	10.7 cm	1.60 L	MHB 33	White/Grey	576			6,336
TEKVAA190T	19.0 cm	12.7 cm	2.50 L	MHB 33	Terracotta/Grey	368			4,048
TEKVAA190W	19.0 cm	12.7 cm	2.50 L	IVIND 33	White/Grey	368			4,048
TEKVAA210T	21.0 cm	13.7 cm	3.00 L	MHB 33	Terracotta	322			3,542
TEKVAA210W	21.0 cm	13.7 cm	3.00 L	IVIMB 33	White/Grey	322			3,542
TEKVAA220T	22.0 cm	14.9 cm	3.60 L	MUD 20	Terracotta	230			2,530
TEKVAA220W	22.0 cm	14.9 cm	3.60 L	MHB 38	White/Grey	230			2,530

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

TEKU HANGING BASKETS

Tekucotta Hanging Baskets

Recyclable CLASSIC Series MAL & TCA (Rigid)

Version MAK: multi hole star bottom with bayonet lock Version MAL: water overflow dome; decorative design Prices for matching hanger (sold separately) at bottom of page.

Standard colours: Recyclable terracotta, pine green and

anthracite

Circular360: Post Consumer Recycling Material - Household

Waste



Series MAL Water overflow



Series MAL

	l .								
CODE	DIAMETER	HEIGHT	VOLUME	HANGER	COLOUR	NET QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKMAL200A					Anthracite				
TEKMAL200XX	20.0 cm	13.4 cm	3.0 L	MHB 33 (sold separately)	Pine Green Terracotta White	46			3,680
TEKMAL250A					Anthracite				
TEKMAL250XX	25.0 cm	15.4 cm	5.0 L	MHB 38 (sold separately)	Pine Green Terracotta White				2,760
TEKMAL270A					Anthracite				
TEKMAL270XX	27.0 cm	16.4 cm	6.0 L	MHB 45 (sold separately)	Pine Green Terracotta White	46			2,208
TEKTCA300T				MUAGO	Terracotta				
TEKTCA300XX	30.0 cm	18.3 cm	7.7 L	MHA 60 (sold separately)	Anthracite Pine Green				1,672

Tekucotta Hanging Baskets - Trend Colours

Recyclable CLASSIC Series MAL & TCA (Rigid)

Version MAL: water overflow dome; decorative design. Prices for matching hanger (sold separately) below.

Trend colours: Recyclable orange, light-green, yellow, red, pink and

blackberry

Circular360: Post Consumer Recycling Material - Household Waste



CODE	DIAMETER	HEIGHT	VOLUME	HANGER	COLOUR	NET QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKMAL200XX	20.0 cm	13.4 cm	3.0 L	MHB 33 (sold separately)	Blackberry	46			3,680
TEKMAL250XX	25.0 cm	15.4 cm	5.0 L	MHB 38 (sold separately)	Light Green Yellow	46			2,760
TEKMAL270XX	27.0 cm	16.4 cm	6.0 L	MHB 45 (sold separately)	Orange Pink	46			2,208
TEKTCA300XX	30.0 cm	18.3 cm	7.7 L	MHA 60 (sold separately)	Red	38			1,672

Recyclable Hangers



						4	20000000
CODE	DESCRIPTION	COLOUR	PRICE / 1000	COLOUR	PRICE / 1000	CARTON QTY	PALLET QTY
TEKMHB33XX	Tag attachment, wide hook	Standard Colours		Trend Colours		874 (19x46)	17,480
TEKMHB38XX	Tag attachment, wide hook	Standard Colours		Trend Colours		598 (13x46)	11,960
TEKMHB45XX	Tag attachment, wide hook	Standard Colours		Trend Colours		552 (12x46)	11,040
TEKMHA600XX		Standard Colours		Trend Colours		380 (10x38)	5,320

TEKU TRAYS

TEKU®

Marketing Trays

PREMIUM Series PT (Lightweight)

Marketing trays of the PT series for excellent branding and a better view of printed and coloured pots.

Fast watering and drainage and optimum pot machine properties - these small details are often what makes a big difference. Stepped cultivation bottom with punched holes ensure reliable drainage.

Standard colours: black

Special colours available.

<u>Danish Trolley</u>

PT 2556 10.5/10 D

Trays per shelf: 5 Pots per shelf: 50 Danish Trolley

PT 2556 10.5/12 D

Trays per shelf: 5 Pots per shelf: 60



Trays per shelf: 5 Pots per shelf: 40





PT 2556 10.5/10 D

PT 2556 10.5/12 D



PT 2556 13/8 D

CODE	LENGTH	BREADTH	TO FIT POTS	POTS PER TRAY	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKPT255610510D	56 cm	25 cm	VCG 10.5; VCC 10.5; VCC 11 VOL	10	pallet only			1,656
TEKPT255610512D	56 cm	25 cm	VCG 10.5; VCH 11 VOL; MXC 10.5	12	pallet o	only		1,656
TEKPT2556138D	56 cm	25 cm	VCG 13; VCC 13; VCC 14 VOL	8	pallet o	only		1,656

Shuttle Trays

PREMIUM Ser<mark>ies TT (Lightweig</mark>ht)

Type STD: deep version Type F: Extra deep version TYPE AZ: normal version

Standard colour: black



TT 2653-13/8



CODE	LENGTH	BREADTH	TO FIT POTS	POTS PER TRAY	TRAYS PER DT SHELF	NET QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKTT2653138AZ	53.0 cm	26.3 cm	Ø 13.0 cm	8	5	55			1,440
TEKTT2653138STD	53.0 cm	26.3 cm	Ø 13.0 cm Deep	8	5	55			1,392
TEK315510515AZ	53.0 cm	31.5 cm	Ø 10.5 cm	15	4	74			1,110
TEK3155918AZ	55.0 cm	31.0 cm	Ø 9.0 cm	18	4	82			1,230
TEK3155918F	55.0 cm	31.0 cm	Ø 9.0 cm Extra Deep Version	18	4	pallet only			1,200

www.lssystems.co.uk sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk

TEKU TRAYS

Cultivation & Marketing Trays

PREMIUM Series TP (Lightweight)

Some of these TEKU twin trays can be separated at the perforated line, for consumer-orientated sales units. All trays of this type are provided with suitable cuts for tag labels and carrying handles.

*: for direct planting

AZ: Normal version, pots fit flush with the rim of the tray.

Danish Trolley

TP 1818-9 AZ/4

Trays per shelf: 21 Plants per shelf: 84

TP 2836-9 AZ/12-6

Trays per shelf: 6+(2x1/2) Plants per shelf: 84

TP 2026-10.5/4

Trays per shelf: 18 Plants per shelf: 72 **Danish Trolley**

TP 1828-9 AZ/6

Trays per shelf: 14 Plants per shelf: 84





TP 1818-9 AZ/4*

TP 2836-9 AZ/12-6*



TP 2026/10.5/4



CODE	LENGTH	BREADTH	TO FIT POTS	POTS PER TRAY	CARRY HANDLE	CASE QTY	PRICE / CASE	PRICE / 1000	PALLET QTY
TEKTP18189AZ4	18.0 cm	18.0 cm	Ø 9.0; 9.5 cm	4	TG40	480			5,280
TEKTP18289AZ6	27.8 cm	18.1 cm	Ø 9.0 cm	6	TG40	640			7,360
TEKTP20264	26.0 cm	20.0 cm	Ø 10; 10.5 cm; 11 VOL	4	TG40	400			4,400
TEKTP283612	36.0 cm	28.0 cm	Ø 9.0 cm	2 x 6	TG50	320			3,.680

Cultivation Trays (ECO)

PREMIUM Series ECO (Lightweight)

The plants may directly be cultivated in the tray. The nests are suitably designed for easy removal of the plants.

Danish Trolley

ECO 6/28

Trays per Danish Trolley Shelf: 5 Plants per Danish Trolley Shelf: 140

ECO 8/18

Trays per Danish Trolley Shelf: 4 Plants per Danish Trolley Shelf: 72

ECO 9/15

Trays per Danish Trolley Shelf: 4 Plants per Danish Trolley Shelf: 60

ECO 3156-9x9/18

Trays per Danish Trolley Shelf: 4 Plants per Danish Trolley Shelf: 72

Standard colour: black





CODE	LENGTH	BREADTH	HEIGHT	CELL VOL	CELL DIA.	PLANTS PER TRAY	PLUG RE- MOVER	NET QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKECO628	50.0 cm	28.0 cm	6.4 cm	132 ml	6.2 cm	28	AP 6/28	128			2,048
TEKECO818	53.0 cm	30.0 cm	6.5 cm	222 ml	8.1 cm	18	AP 8/18	80			2,240
TEKECO915	53.0 cm	30.0 cm	7.1 cm	294 ml	8.8 cm	15	AP 9/15	84			2,352
TEKECO3156918	56.5 cm	31.5 cm	8.8 cm	498 ml	8.9 x 9.3 cm	18	-	68			748
TEKAP305	028	ECO 6/28 Plug Remover									-
TEKAP305	ECO 8/18 Plug Remover						1			-	
TEKAP305315		ECO 9/15 Plug Remover									-

TEKU TRAYS

TEKU®

Cultivation & Marketing Trays

PREMIUM Series EP (Lightweight)

Some of these TEKU twin trays can be separated at the perforated line, for consumer-orientated sales units. All trays of this type are suitable for direct planting and are provided with suitable cuts for tag labels and carrying handles.

Danish Trolley

EP 2634/12-6

Trays per shelf: 7+(1x½) Plants per shelf: 90

EP 2832/20-10

Trays per shelf: 8 Plants per shelf: 160 **Danish Trolley**

EP 2328/20-10

Trays per shelf: $10+(2x\frac{1}{2})$ Plants per shelf: 220

EP 2936/20-10

Trays per shelf: 6+½ Plants per shelf: 130



EP 2832/20-10

EP 2936/20-10

CODE	LENGTH	BREADTH	HEIGHT	CELL VOL	PLANTS PER TRAY	CASE QTY	PRICE / NET	PRICE / 1000	PALLET QTY
TEKEP23282010	28.0 cm	23.0 cm	6.3 cm	125 ml	2 x 10	pall	et only		4,104
TEKEP2634126	34.0 cm	26.0 cm	7.5 cm	310 ml	2 x 6	pall	et only		2,728
TEKEP28322010	32.0 cm	28.0 cm	6.0 cm	166 ml	2 x 10	pall	et only		3,000
TEKEP29362010	36.0 cm	29.0 cm	6.5 cm	165 ml	2 x 10	pall	et only		2,112

ECO Tray - Programme for Minis



ECO 6/28 with MPB 6 & TO 6 D



ECO 8/18 with TO 7 D & TO 8 Z

DESCH PLANTPAK

Container Pots - T Range

- Base and side drainage
- · Low gloss finish
- Available in sleeves or Traypacks
- · Colour is black





CODE	REFERENCE	VOL. (L)	Ø (cm)	HEIGHT (cm)	POTS PER DANISH SHELF	SLEEVE QUANTITY	PRICE / 1000	PALLET QUANTITY	TRAYPACK QUANTITY
PAXCOT320	32T	15.0	32.0	25.7	7	25		[22x25] 550	396
PAXCOT375	38T	20.0	37.5	25.7	5	25		[16x25] 400	272

Marketing Trays - NexTraY for 5° and 8° Pots





- Strong design to hold pots firmly
- Smooth edges for safe handling
- More trays per pallet reduces storage space
- Improved all weather packaging
- Made from re-cycled polystyrene
- Fully re-cyclable
- 4 (NX4) per Danish shelf

CODE	REFERENCE	POT CAPACITY	EXTERNAL SIZE (mm)	PACK QUANTITY	PRICE / 1000	PALLET QUANTITY
PAXNX4915	NX4-9/15	15 x 9cm 5°/8°	564 x 315 x 59	42		[42x35] 1,470
PAXNX4918	NX4-9/18	18 x 9cm 8°	564 x 315 x 52	42		[42x35] 1,470
PAXNX41015	NX4-10/15	15 x 10cm 8°	564 x 315 x 59	38		[38x35] 1,330
PAXNX410515	NX4-10.5/15	15 x 10.5cm 5°	564 x 315 x 59	38		[38x35] 1,330
PAXNX4128	NX4-12/8	8 x 12cm 5°/8°	564 x 315 x 72	38		[38x35] 1,330
PAXNX4138	NX4-13/8	8 x 13cm 5°/8°/1Ltr	564 x 315 x 72	38		[38x35] 1,330
PAXNX41L24	NX4-1L/2/4	8 x 13cm 5°/8°/1Ltr	564 x 315 x 72	38		[38x35] 1,330
PAXNX4146	NX4-14/6	6 x 14cm 5°/1.5Ltr	564 x 315 x 72	38		[38x35] 1,330
PAXNX4176	NX4-17/6	6 x 17cm 5°/2Ltr	564 x 315 x 75	38		[38x35] 1,330

DESCH PLANTPAK

Bedding Plant Systems - AMC System

- 18 packs per Danish shelf
- AMT3 carrying tray holds 3 packs, fits 6 per Danish shelf
- AMT6 holds 6 packs, fits 3 per shelf
- Equal centre to centre cell pitches in both directions*
- Infinite centre to centre cell pitches from tray to tray*
- Recessed handle slots for automated handle application
- Care card slots on both sides of all units
- 19 packs loose per Danish Trolley Shelf (except AMC4-20 which fits 12)
- Available in cases and Traypacks
 - * Except AMC6-12 and AMC4-20



CODE	REFERENCE	NUMBER OF CELLS	CELL VOL (ml)	EXTERNAL SIZE (mm)	PACK QUANTITY	PRICE / 1000	PALLET QUANTITY	TRAYPACK QUANTITY
PAXAMT3	AMT3 (Tray 3-packs)			535 x 210 x 58	120		[16x120] 1,920	-
PAXAMT6	AMT6 (Tray 6-packs)			535 x 420 x 58	51		[12 x 51] 612	-
PAXAMC0604	AMC6-4 cell pack	4	385	210 x 178 x 69	456		[16x456] 7,296	3,400
PAXAMC0606	AMC6-6 cell pack	6	230	210 x 178 x 69	456		[16x456] 7,296	3,400
PAXAMC0609	AMC6-9 cell pack	9	128	210 x 178 x 69	456		[16x456] 7,296	3,400
PAXAMC0612	AMC6-12 cell pack	12	100	210 x 178 x 69	456		[16x456] 7,296	3,400
PAXAMC0420	AMC4-20 cell pack	20	94	270 x 209 x 69	300		[16x300] 4,800	2,650

EPLA Hanging Pots - Jacinta

Optimised water management

Standard colours:

Quantity per box includes relevant Hangers

White, Terracotta, Anthracite and Green





CODE	REF	VOL (L)	HEIGHT (mm)	HANGER	QTY PER DANISH SHELF	TOP/BOTTOM DIMENSIONS (mm)	CASE QUANTITY	PRICE / 1000	PALLET QUANTITY
PEMJAC27	JAC27	5.9	165	CON44/50	10	270 / 170	224		1,500
PEMJAC30	JAC30	8.0	180	CON50	9	300 / 180	140		1,000
PEMCON44	CON44		Hanger 44cm						-
PEMCON50	CON50				Hanger 50cm		500		-

sales: **01772 812484** fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

SOPARCO

Octo Pot + Hanger

Glossy surface Rigid and solid

Terracotta, White and Pine Green Colours:





CODE	REF	VOL. (L)	Ø (cm)	HEIGHT (cm)	PER CC SHELF	HANGER	COLOUR	BOX QUANTITY	PRICE / 1000	PALLET QUANTITY
SOP73881017	7388-1017	4.7	25.0	16.9	11-12	7552	Terracotta	56		[12x56] 672
SOP73881005	7388-1005	4.7	25.0	16.9	11-12	7552	White	56		[12x56] 672
SOP73881954	7388-1954	4.7	25.0	16.9	11-12	7552	Pine Green	56		[12x56] 672
SOP73911017	7391-1017	7.0	27.0	18.4	10	7552	Terracotta	56		[12x56] 672
SOP73911005	7391-1005	7.0	27.0	18.4	10	7552	White	56		[12x56] 672
SOP73911954	7391-1954	7.0	27.0	18.4	10	7552	Pine Green	56		[12x56] 672
SOP73931017	7393-1017	10.0	30.0	20.5	8	7552	Terracotta	35		[12x35] 420
SOP73931005	7393-1005	10.0	30.0	20.5	8	7552	White	35		[12x35] 420
SOP73931954	7393-1954	10.0	30.0	20.5	8	7552	Pine Green	35		[12x35] 420

Recyclable Rose Containers Deep 5°

Extra deep containers with multi-hole cross base.

Colour:s: Taupe



CODE	REFERENCE	VOL. (L)	Ø (cm)	HEIGHT (cm)	POTS PER SHELF	BOX QUANTITY	PRICE / 1000	BOXES ON PALLET QUANTITY	PALLET QUANTITY
SOP7007PCWE	7007-PCWE	1.0	11.7	13.5	-	-		-	7,920
SOP7014PCWE	7016-PCWE	2.0	14.9	17.4	-	60		[72x60/S] 4,320	4,320
SOP7027PCWE	7027-PCWE	3.0	16.8	19.2	28	70		[42x70/S] 2,940	2,940
SOP7028PCWE	7028-PCWE	4.0	18.8	21.8	21	60		[60x36/S] 2,160	2,160

DECORATIVE PLANTERS

Olive Planter Series

Classic design with a glossy surface. Suitable for indoor and outdoor use.

Made from 100% recycled plastic.

Colours:

Green, Grey and Light Blue

Olive Tall Square 40cm



CODE	SIZE D x H	COLOUR	VOL	PRICE EACH
PAFKA200327GN	40 x 42 cm	Green	32 L	
PAFKA200327GY	40 x 42 cm	Grey	32 L	
PAFKA200327LB	40 x 42 cm	Light Blue	32 L	

Olive Planter Green



CODE	SIZE D x H	VOL	PRICE EACH
PAFKA180502GN	23 x 23	6	
PAFKA180503GN	30 x 30	14	
PAFKA180504GN	40 x 40	34	

Olive Planter Grey



CODE	SIZE D x H	VOL	PRICE EACH
PAFKA180502GY	23 x 23	6	
PAFKA180503GY	30 x 30	14	
PAFKA180504GY	40 x 40	34	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

DECORATIVE PLANTERS

Crackle Planter



CODE	SIZE D x H	COLOUR	VOL	PRICE EACH
PAFCTCR12WR	30.4 x 23.8 cm	Ceramic Wh./Glitz Red	11 L	
PAFCTCR12CW	30.4 x 23.8 cm	Ceramic White	11 L	
PAFCTCR12CON	30.4 x 23.8 cm	Concrete	11 L	
PAFCTCR12CC	30.4 x 23.8 cm	Ceramic Cream	11 L	
PAFCTCR14CW	36.8 x 29.7 cm	Ceramic White	18.7 L	
PAFCTCR14CON	36.8 x 29.7 cm	Concrete	18.7 L	
PAFCTCR14CC	36.8 x 29.7 cm	Ceramic Cream	18.7 L	

Crackle Window Box 12" (10 Per Case)



CODE	SIZE D x H	COLOUR	VOL	PRICE/CASE
PAFCTCRWB12WR	30 x 20 x 15 cm	Ceramic Wh./Red	5.7 L	
PAFCTCRWB12CW	30 x 20 x 15 cm	Ceramic White	5.7 L	
PAFCTCRWB12CON	30 x 20 x 15 cm	Concrete	5.7 L	
PAFCTCRWB12CC	30 x 20 x 15 cm	Creamic Cream	5.7 L	

Crackle Hanging Basket 12" (10 Per Case)



CODE	SIZE D x H	COLOUR	VOL	PRICE/CASE
PAFCTCRHBWR	30 x 17 cm	Ceramic Wh./Red	4.6 L	
PAFCTCRHBCW	30 x 17 cm	Ceramic White	4.6 L	
PAFCTCRHBCON	30 x 17 cm	Concrete	4.6 L	
PAFCTCRHBCC	30 x 17 cm	Creamic Cream	4.6 L	

Prisma Planter 12" (10 Per Case)



CODE	SIZE D x H	COLOUR	VOL	PRICE/CASE
PAFCTPRP12G	30.4 x 23.8 cm	Powdered Ginger	9.5 L	
PAFCTPRP12MG	30.4 x 23.8 cm	Powdered Moss Green	9.5 L	
PAFCTPRP12R	30.4 x 23.8 cm	Powdered Raisin	9.5 L	
PAFCTPRP12RP	30.4 x 23.8 cm	Powd' Raspberry Pink	9.5 L	
PAFCTPRP12SY	30.4 x 23.8 cm	Powd' Sunglow Yellow	9.5 L	

Prisma Hanging Basket 12" (10 Per Case)



Prisma Oval 16" (10 Per Case)



Sadie Planter Square 10" (10 Per Case)



CODE SIZE D x H		COLOUR	VOL	PRICE/CASE
PAFCTSADSQGC	24.6 x 21.5 cm	Grey Clay	8.5 L	

DECORATIVE PLANTERS

Russel Planter Round 12" (10 Per Case)



CODE	SIZE D x H	COLOUR	VOL	PRICE/CASE
PAFCTRUSP	30 x 24 cm	Beige Grey	9.5 L	

Phoebe Planter Tall 12.5" (10 Per Case)



CODE SIZE D x H		COLOUR	VOL	PRICE EACH
CTPH125TCCF	32 x 35 cm	Classic Creamy Fusion	18.9 L	

Ceramic Look Planter - Mottled Grey



CODE	SIZE D x H	COLOUR	VOL	PRICE EACH
PAFKA170104A	30.5 x 22 cm	Mottled Grey	8.5 L	
PAFKA170105A	39.5 x 30 cm	Mottled Grey	14 L	

Tulum Planter 12"



CODE	SIZE D x H	COLOUR	VOL	PRICE EACH
PAFCTTULWW	30 x 24 cm	White Wash	11.35 L	

Piper Planter 12" (10 Per Case)



CODE SIZE D x H		COLOUR	VOL	PRICE/CASE
PAFCTPIP12	31 x 22.3 cm	Santa-Fe	9.5 L	

Dune Planter with Rim 28cm

Flow Blue *: 100% recycled plastic



CODE	CODE SIZE D x H COLOUR		VOL	PRICE EACH
PAFCTPOLDIB	28 x 30 cm	Polished Iris Blue	12.25 L	
PAFCTPOLDLT	28 x 30 cm	Polished Lagoon Teal	12.25 L	
PAFCTFLOW3 28 x 30 cm		Flow Blue *	13.6 L	

Celtic Planter





CODE	SIZE D x H	COLOUR	VOL	PRICE EACH
PAFKACEL36G	36 x 36 cm	Green	13.5 L	
PAFKACEL36W	36 x 36 cm	White	13.5 L	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

HANGING BASKETS ROUND

Deola



CODE	SIZE	CASE	PRICE / CASE
PAFWIC507	12″	20	
PAFWIC519	14"	20	

Parkland



CODE		SIZE	CASE	PRICE / CASE
PAFWIC282	25	12"	20	
PAFWIC282	26	14"	20	

Black Rattan



CODE	SIZE	CASE	PRICE /CASE
PAFWICBI	10″	20	
PAFWICBK	12″	20	
PAFWICBL	14"	20	
PAFWICBJ	16″	20	
PAFWICBO	18" (4 Chain)	20	

Kukui Wall Basket -All Weather PVC



CODE	SIZE	CASE	PRICE / CASE
PAFAWBKU14W	14"	20	

Dipped Grey White Round



CODE	SIZE	CASE	PRICE / CASE
PAFWICPU	12"	20	
PAFWICPV	14"	20	

Oliver



CODE	SIZE	CASE	PRICE / CASE
PAFWIC506	12"	20	
PAFWIC518	14"	20	

Gabriel



CODE	SIZE	CASE	PRICE / CASE
PAFWIC511	12"	20	
PAFWIC523	14"	20	

Willow Decoration Heart Basket



CODE	SIZE	CASE	PRICE /CASE
PAFPLQ007	25cm White	20	
PAFPLQ008	25cm Grey	20	
PAFPLQ008L	30cm White	20	
PAFPLQ007L	30cm Grey	20	

HANGING BASKETS CONE

Deola



Dipped Grey W	/hite (Cone
---------------	---------	------



CODE	SIZE	CASE	PRICE / CASE
PAFWIC612	12"	20	
PAFWIC613	14"	20	

CODE	SIZE	CASE	PRICE / CASE
PAFWICPW	12"	20	
PAFWICPX	14"	20	

Parkland



CODE	SIZE	CASE	PRICE / CASE
PAFWIC2827	12"	20	
PAFWIC2828	14"	20	

Oliver



CODE	SIZE	CASE	PRICE / CASE
PAFWIC533	12"	20	
PAFWIC545	14"	20	

Black Rattan



CODE	SIZE	CASE	PRICE /CASE
PAFWICBM	12"	20	
PAFWICBN	14"	20	

Gabriel



CODE	SIZE	CASE	PRICE / CASE
PAFWIC536	12"	20	
PAFWIC548	14"	20	

Woodland Wall Basket Round 13"



CODE	SIZE	CASE	PRICE / CASE
PAFWIC1307	13″	20	

Gabriel Wall Basket Cone



CODE	SIZE	CASE	PRICE / CASE
PAFWIC591	14"	20	

WIRE & WROUGHT IRON BASKETS

Flat Bottom - Narrow Planting Holes

Baskets are supplied with clip-on heavy duty chains, fully assembled for easy handling. Flat bottomed straight sided; 12", 14" or 16" and 18" heavy duty.



Plastic coated.

CODE	DESCRIPTION	CASE	PRICE / CASE
PAFBAFMON12	12" Wire Basket	24	
PAFBAFMON14	14" Wire Basket	24	
PAFBAFMON16	16" Wire Basket	24	

Growers Basket - Flat Bottom



CODE	DESCRIPTION	CASE	PRICE / CASE
PAFBAFRM12	12" Growers Basket	25	
PAFBAFRM14	14" Growers Basket	25	
PAFBAFRM16	16" Growers Basket	25	

Heavy Duty - 4 Chain



CODE	DESCRIPTION	CASE	PRICE / CASE
PAFBAFHD18	18" HD Wire Basket	12	
PAFBAFHD20	20" HD Wire Basket	12	

Hanging Basket Chains

CODE	SIZE	CASE	PRICE / CASE
PAFBAFC14	14" (3 strand)	50	
PAFBAFC18	18" (3 strand)	50	
PAFBAFC184	18" (4 strand)	50	
PAFBAFC18HD4	18" Heavy Duty (4 strand)	25	
PAFBAFC20HD4	20" Heavy Duty (4 strand)	20	

Hanging Basket Brackets - Black

Robust hanging basket bracket in black. Easily fixes to exterior walls.



CODE	SIZE	CASE	PRICE / CASE
PAFBAB12	12"	24	
PAFBAB14	14"	24	
PAFBAB16	16"	24	
PAFBAB20	20"	6	

Wall Basket



CODE	DESCRIPTION	CASE	PRICE / CASE
PAFBAFW16	16" Wall Basket	24	

Sphagnum Moss

Ideal for hanging baskets, holly wreaths and moss rings.







SwellGe

CODE	DESCRIPTION	BAG	PRICE / BAG
BLSML-BAG	Sphagnum Moss	Large	

SwellGel Water Storing Granules

SwellGel is a free-flowing granular material, that is simply mixed with your preferred growing media. When irrigation or rainfall occurs, the SwellGel granules are activated and expand into thousands of self-contained 'reservoirs', each absorbing hundreds of times their own weight of water.





- SwellGel greatly increases and maintains air content
- SwellGel is non-toxic, biodegradeable, has a neutral pH and is inert, thus
 making it suitable for use with any plant species

CODE	DESCRIPTION	OUTER	PRICE / EACH
SWE01K	SwellGel 1kg Tubs or Pouches	12	

Flower Bags - Jute

SEasy to use flower bags for great value hanging baskets. Simply plant up with plants into the slots and hang from a bracket or a hook. Allows for uniformed watering and longer lasting than plastic.



CODE	DESCRIPTION	OUTER	PRICE / CASE
PAFFLOW	Jute Bag Green 23 x 55 cm	60	

BASKET LINERS

Coco Liners



CODE	DESCRIPTION	DESCRIPTION CASE		
PAFCOCO10	10" Coco Liner	60		
PAFCOCO12	12" Coco Liner	60		
PAFCOCO14	14" Coco Liner	50		
PAFCOCO16	16" Coco Liner	45		
PAFCOCO18	18" Coco Liner	30		
PAFCOCO18H	18" Coco Liner (Length)	20		
PAFCOCO24H	24" Coco Liner (Length)	25		
PAFCOCO30H	30" Coco Liner (Length)	20		

Coco Liner on a Roll - 500gm/m²



CODE	DESCRIPTION	PRICE / ROLL
PAFCOCOR06	0.6 x 50m Coco Roll	
PAFCOCOR1	1.0 x 50m Coco Roll	

Basket Liners - Jute



CODE	DESCRIPTION	QTY	PRICE / CASE
PAFBAL12B100	12" Basket Liner	100	
PAFBAL14B100	14" Basket Liner	100	
PAFBAL16B100	16" Basket Liner	100	
PAFBAL18B100	18" Basket Liner (no slits)	100	

Moss Jute Roll



CODE DESCRIPTION		PRICE / ROLL
PAFSMOSF	0.6 x 60m Jute Roll	
PAFSMOSFW	1.0 x 75m Jute Roll	

PLANTOPIA BASKETS

Plantopia Hanging Baskets

- No moss or liner required
- Increase productivity
- Outstanding quality... in a fraction of the time
- Supplied with chains



CODE	DESCRIPTION	CASE	PRICE / CASE
PAPLRB12G	12" Green	32	
PAPLRB14G	14" Green	24	
PAPLPEDST	Green Pedestal	1	

Plantopia Wall Baskets

- 5 side planting pockets with detachable panels for easy plant placement
- Large water reservoir
- Easy to fit, dedicated wall bracket allows basket to be easily removed
- Supplied with all fixing screws and plastic wall plugs
- Colour is green



CODE	DESCRIPTION	CASE	PRICE / CASE
PAPLWB20G	20" Wall Basket Green	20	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

VITAX COMPOST

Traditional Composts

A comprehensive range of high quality composts for professional growers produced entirely from our own resources to ensure quality and consistency. They are produced from graded Irish Moss Peat harvested from our own peat mire and blended at our own plant in County Kildare, Ireland. The peat is medium age, light brown in colour and provides excellent aeration and water holding capability.

Available sizes: 75 litre (x48 per pallet) & 2m3 IBC's



Traditional Modular Seed Compost

Traditional compost for seed sowing, cuttings and transplants.

Peat Grade:	100% 0-6mm
Added fertiliser:	7-21-21+4.0 MgO+TE - 1.0 kg/m³
Added lime:	3.125 kg/m³
pH:	5.5 - 6.3
Price [75L bag]:	(Code: VIT75MSC)



Traditional Pot Bedding Compost

For raised bedding pots, trays, hanging baskets and tubs.

Peat Grade:	100% 0-6mm
Added fertiliser:	13-11-23+1.5 MgO+TE - 1.5 kg/m³
Added lime:	3.5 kg/m³
pH:	5.5 - 6.3
Price [75L bag]:	(Code: VIT75PBC)



Traditional Container Compost

Blended product for container grown plants.

Peat Grade:	50% 0-6mm / 15% 6-10mm / 35% 10-25mm
Added fertiliser:	13-11-23+1.5 MgO+TE - 1.0 kg/m³
Added lime:	2.7 kg/m³
рН:	5.0 - 5.5
Price [75L bag]:	(Code: VIT75TCC)



Traditional Ericaceous Container Compost

Acidic compost specially formulated for potted plants.

Peat Grade:	50% 0-6mm / 15% 6-10mm / 35% 10-25mm
Added fertiliser:	13-11-23+1.5 MgO+TE - 1.0 kg/m³
Added lime:	no added lime
pH:	4.8 - 5.2
Price [75L bag]:	Code: VIT75TEC)



VITAX COMPOST

Q4 Multi-purpose Compost

Contains Q4 fertiliser.
Suitable for seed sowing, pricking out and potting on. Ideal for hanging baskets and tubs.

Peat Grade:	100% 10mm
Added fertiliser:	5.3-7.5-10+3.0 MgO+TE - 3.5 kg/m ³
Added lime:	3.5 kg/m³
pH:	6.0
Price [56L bag]:	(Code: VIT56MPCQ4)



AGGREGATES

Horticultural Potting Grit

- Lime-free washed grit
- Use around cacti, succulents and alpines
- Mix with compost to improve drainage
- Improves drainage when dug into heavy soil
- Particle size: 1-5 mm



MEL20HPG

Price [20 Kg]:

Gravel 20 Kg

- · Lime-free washed gravel
- Provides excellent drainage and top dressing
- Ideal for use in water features
- Use for paths, drives and rock gardens
- Particle size: 4-10 mm



MEL20HGR

Price [20 Kg]:

Coarse Grit 20 Kg

- Horticultural grade
- Lime-free and washed
- Decorative top-dressing for pots
- Ideal for use around cacti and alpines
- Particle size: 2-6 mm



MEL20HCG

Price [20 Kg]:

Silver Sand 20 Kg

- · Horticultural grade lime free
- Mix with peat to make compost for cuttings
- · Improves aeration
- · Ideal for top dressing of lawns



MEL20SIS

Price [20 Kg]:

Sharp Sand 20 Kg

- Horticultural grade coarse sand
- Washed and lime-free
- Improves drainage in seed and cuttings compost
- Can also be used when laying paving etc



MEL20HSHS


Price [20 Kg]:

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

RETAIL


WESTLAND FARMYARD MANURE

- · Perfect soil conditioner
- Rich source of organic matter
- · Replensihes depleted soils
- Produces higher crop yields & abundant blooms
- Works best with beds & borders, vegetable plots, roses and trees & shrubs



GROWMOOR ERICACEOUS PLANTING & POTTING MIX COMPOST

- · Perfect for acid loving plants
- 6 months feed
- Contains Iron for greener foliage
- Added zinc complex helps build plant resilience



WES50FYM

Price [50L bag]:


GRO60ERE

Price [60L bag]:

AFTERCUT ALL IN ONE LAWN FEED, WEED & MOSS KILLER

Key Benefits

- Lawn feed, weed & moss killer treatment
- NPK 12-2-4
- Contains 2-4-D Mecocrop-P and Ferrous Sulphate
- 500m² Bag



Price [500m²]:

Code: WESAFWM500)

RETAIL

LANDSCAPE BARK

- Larger size bark chips made from entirely renewable resources. FSC Approved.
- Decorative mulch, children's play areas, weed suppression and moisture retention.
- Area treated 4m²



WES90LANB

Price [90L bag]:

JOHN INNES NO.1 YOUNG PLANT COMPOST

- Gives young plants the best start in life
- Feeds for four weeks
- Encourages healthy growth
- **Develops stronger roots**
- Added Zinc complex for healthy growth



GRO35JI1

Price [35L bag]:

GRO-SURE TOMATO PLANTER LARGE

- Feeds for 6 weeks
- Moisture retention formula requires less watering
- Extra large more roots, more fruit, vegetables & tomatoes
- Perfect for growing tomatoes, peppers, chillies, strawberries, beans & salad crop
- Added seaweed



WESGRBLTOMBIG

Price [large]:

JACK'S MAGIC **COMPOST**

- Rich, peat based compost
- Great for seed sowing & potting on
- Use in beds, borders & containers
- Perfect medium for flowers, fruits and vegetables



WES60JMAP

Price [60L bag]:

JOHN INNES NO.2 POTTING-ON COMPOST

- Feeds & encourages healthy plant growth
- Added Potassium humate promoting root & shoot growth
- **Encourages flower development**
- Feeds for five weeks

Develops stonger roots



GRO35JI2

Price [35L bag]:

GROWMOOR 4-PLANT GROWBAG

- Suitable for greenhouse, conservatory or patio use
- Ideal for flowers, fruit & vegetables
- Rich in potash for abundant flowering & fruiting



GRO384PGB

Price [medium]:

TOP SOIL

- Specially selected rich clay loam
- Ideal for use all round the garden
- Quality soil with no debris & stones
- Perfect for bed & borders, filling hollows and topping-up



WES35TS

Price [35L bag]:

JOHN INNES NO.3 MATURE PLANT COMPOST

- Nutures & sustains growth
- Feeds for four months
- Rich in nutrients for hungry plants
- Encourages new growth



Price [35L bag]:

SINCLAIR PRO GROWING MEDIA

PERLITE

This expanded volcanic rock is an excellent additive for composts to improve aeration and drainage.

- Inorganic and sterile
- Free from pests, diseases and weeds
- · Helps reduce compaction and 'slumping' of growing media
- Improves compost aeration
- Makes growing media easier to manage because of improved wetting and capillary movement of water
- Helps stabilise compost temperature







Perlite Special Seed 100L

Particle size: 1.0 - 3.0mm Improves aeration.

Perlite Standard 100L

Particle size: 2.0 - 5.0mm Replaces sand or grit for optimum aeration.

Perlite Supercoarse 100L

Particle size: 1.0 - 6.0mm Ideal for potting orchids, bromeliads, tropical plants and bonsai.



CODE	PARTICLE SIZE	DESCRIPTION	SIZE	PRICE
SINPERSS100	1-3 mm	Perlite Seed Special	100L	
SINPERST100	2-5 mm	Perlite Standard	100L	
SINPERSC100	1-6 mm	Perlite Super Coarse	100L	

VERMICULITE

In composts, improves aeration and drainage whilst also providing nutrient buffering capacity. Widely used in propagation as a seed cover.

- Eases re-wetting of growing media when it has dried out
- · Extends watering intervals
- Improves growing media aeration
- Acts as a nutrient buffer
- The excellent insulation properties and ability to hold nutrients as well as air make it an ideal choice for seed composts







Vermiculite Fine 100L

Particle size: 1.0 - 3.0mm Aids water management of peat-based growing.

Vermiculite Medium 100L

Particle size: 2.0 - 5.0mm Improves aeration. Used for covering seed.

Vermiculite Coarse 100L

Particle size: 5.0 - 15.0mm Improves aeration and aid water holding capacity.



	CODE	PARTICLE SIZE	DESCRIPTION	SIZE	PRICE
N	SINVERFN100	1-3 mm	Vermiculite Fine	100L	
	SINVERMD100	2-5 mm	Vermiculite Medium	100L	
	SINVERCR100	5-15 mm	Vermiculite Coarse	100L	

SINCLAIR POTTING & BEDDING COMPOST

For raising bedding and pot plants in pots, trays, hanging baskets and tubs. Peat reduced.

N 18 P₂O₅ 224 K₂O 384 g/m³ pH 6.0



SIN75PBCSIN SIN75MSCSIN

Price [75L bag]:

SINCLAIR MODULAR SEED

A free-flowing compost suitable for raising trans-

plants, seed sowing and rooting cuttings. Peat

COMPOST

N 96 P₂O₅ 170 K₂O 249 g/m³

reduced.

pH 6.0

SINCLAIR CONTAINER COMPOST

Less coarse than Sinclair Nursery Stock growing medium and without grit. Peat reduced.

N 120 P_2O_5 140 K_2O 240 g/m^3 pH 5.0



SIN75PCC

Price [75L bag]:

Price [75L bag]:

52 | COMPOST, FERTILISER & PEST CONTROL | Sinclair Growing Media

HAWITA MILLED PEAT

BULK PRODUCTS

Hawita Fine Substrate

Peat: 0-10mm 100% **pH range:** 2.8-3.5

Product uses: After appropriate pH and nutrient adjustment, for use in propagation from seeds and cuttings for ornamental, salad and vegetable production - especially designed for modular transplants.

CODE	SIZE	1-14	15-26	pallet 27+
HAW150PF	150 L			

Hawita Medium Substrate

Peat: 0-25mm 100% **pH range:** 2.8-3.5

Product uses: After appropriate pH and nutrient adjustment, recommended for ornamental bedding and potting use, also salad and vegetable.

CODE	SIZE	1-14	15-26	pallet 27+
HAW150PM	150 L			

Hawita Coarse Substrate

Peat: 0-40mm 100% **pH range:** 2.8-3.5

Product uses: After appropriate pH and nutrient adjustment, recommended for long-term nursery stock production in containers.

CODE	SIZE	1-14	15-26	pallet 27+
HAW150PC	150 L			

BALTIC MILLED PEAT

Pack size » 150 Litre Bale

New cultivation processes demand customised substrate properties. We meet the high demands of our customers with the continuous further development of all product lines. All raw materials and additives are subjected to permanent quality controls and go through extensive tests. After this process, they are used for the production of potting soil and cultivation substrates and promote the healthy and optimal growth of plants.







MELCOURT® PROFESSIONAL GROWING MEDIA

Sylvagrow Sustainable Growing Medium

Sustainable growing medium for gardeners who are as passionate about the environment as their gardens.

- Superb quality, 100% peat-free compost as used by professionals
- Suitable for a wide range of garden applications including potting-on, planting-out and as a growing bag
- It contains balanced nutrients for the first
 4-6 weeks of growth
- · Contains no peat or green waste compost
- RHS Endorsed
- Also available with added sterilised loam (John Innes)



CODE	DESCRIPTION	SIZE	PRICE
MEL50SGMPC	Sylvagrow Multipurpose	50 L	
MEL50GMPCJI	Sylvagrow MP with added John Innes	50 L	

Spruce Ornamental™ (5065)

A popular high performance mulch, from our 'contract' range suitable for a wide range of professional land-scape applications, including prestigious sites, car parks, superstores, business parks, tubs, plant and window boxes.

- A versatile conifer bark mulch
- Nominal particle size 5-35mm
- Minimum installation depth 75mm/3"
- Use on garden borders and landscaped areas
- Fire tested in accordance with BS 4790:1987
- Approved by the Soil Association (SA)
- Certified by the Forest Stewardship Council (FSC)
- Suitable for vegans




CODE	PARTICLE SIZE	DESCRIPTION	SIZE	PRICE
MELBAR60SOR	5-35 mm	Spruce Ornamental	60 L	
MELBARDBSOR	5-35 mm	Dumpy Bag 190-210kg	0.6m³	

Growing Media Ingredients

Growbark® Pine (7127)

A fine matured, British pine bark designed as a major growing medium ingredient.

- An ideal additive to peat and its alternatives
- Extremely uniform, free-flowing texture
- pH 4.5-5.5
- Low nutrient content
- Sound, stable structure, which will not measurably degrade with time
- Provides excellent air-water balance
- · Entirely pest, disease and weed free
- Rich dark brown in colour
- Approved by the Soil Association (SA)
- Certified by the Forest Stewardship Council (FSC)
- Promotes strong, active rooting



air-filled porosity and long term structural stability.Also an excellent pot mulch to

Potting Bark™ (7124)

- Also an excellent pot mulch to suppress weed, moss and liverwort growth
- pH 4.5 5.5
- Approved by the Soil Association (SA)
- Certified by the Forest Stewardship Council (FSC)

CODE	PARTICLE SIZE	DESCRIPTION	SIZE	PRICE
MELBAR60POT	3-15 mm	Potting Bark	60 L	

Propagating Bark™ (7126)

A fine, substantially dust free, matured, British pine bark designed for use in mixes with peat or suitable alternatives for the vegetative propagation of nursery stock and a wide range of other plants.

pH 4.5-5.5



CODE	PARTICLE SIZE	DESCRIPTION	SIZE	PRICE
MELBAR60PRP	2-7 mm	Propagating Bark	60 L	

Composted Fine Bark™ (7573)

Rich, bark-based soil conditioner. Improves a soil's texture by adding organic matter, thus helping to lighten heavy/clay soil whilst aiding moisture-holding capacity of light/sandy soils. Free-flowing and easy to incorporate into soil.



CODE	PARTICLE SIZE	DESCRIPTION	SIZE	PRICE
MELBAR50CMF	0-10 mm	Composted Fine Bark	50 L	

Playbark (6018)

An exceptionally well-graded, chunky pine bark. Dust and fines have been removed and the product contains less than 5% wood. Tested in accordance with BS EN 1176 and 1177. Fire tested in accordance with BS4790:1987.



CODE	PARTICLE SIZE	DESCRIPTION	SIZE	PRICE
MELBAR60PLG	10-40 mm	Playbark	60 L	

CODE	PARTICLE SIZE	DESCRIPTION	SIZE	PRICE
MELBAR60GBP	0-5 mm	Growbark Pine	60 L	

Grow

Levington® Advance

Seed & Modular

Levington Seed & Modular growing media has a low or medium base level of fertilizer to meet the individual requirements of crops and their growing regimes. The particle size is below 3mm and contains H₃Gro wetting agent with the pH adjusted to between 5.3 and 6.0 using dolomitic lime.



Levington® Seed & Modular Low nutrient F1

- Suitable for all seed sowing
- Having a low level of starter fertilizer ensures even the most sensitive seedlings can grow exceptionally
- Growth of the seedlings can be easily managed with water soluble fertiliz-
- pH range 5.3-6.0
- Modules, trays and small pots up to 7cm

Particle Size 0-3mm

Conductivity 200-294µs

Nutrient Added 96N 49P 159K

CODE	DESCRIPTION	SIZE	PRICE
LEV75F1SMLN	Levington F1 Low Nutrient	75 L	

Levington® Seed & Modular F2

- Suitable for seed sowing and direct rooting of softwood cuttings like Chrysanthemums and Fuchsia
- For more vigorous seedlings including vegetable plants
- pH range 5.3-6.0
- Modules, trays and small pots up to 7cm

Particle Size 0-3mm

Conductivity 269-329µs

Nutrient Added 144N 73P 239K

CODE	DESCRIPTION	SIZE	PRICE
LEV75F2SM	Levington F2	75 L	

Levington® Seed & Modular F2S

- Suitable for seed sowing and direct rooting of cuttings
- Contains 5% silver sand to improve the flow of the growing media even into the smallest cells
- pH range 5.3-6.0
- Modules, trays and small pots up to 7cm

Particle Size 0-3mm

Conductivity 269-329µs

Nutrient Added 144N 73P 239K

CODE	DESCRIPTION	SIZE	PRICE
LEV75F2SMS	Levington F2S	75 L	

Levington® Advance

Pot & Bedding

This range of growing media products has particles no larger than 10mm enabling them to be used from a 12mm pack up to 9cm pots. While water holding is good, using H₂Gro wetting agent also helps encourage root growing.



Levington® Pot & Bedding Low nutrient M1

- Suitable for growing the most sensitive of pot and bedding plants
- Encourages rooting and allows for control of growth with follow up water soluble feeding
- Cell packs and small pots up to 9cm
- pH range 5.3-6.0
- 20% Fibagro Advance

Particle Size 0-10mm

Conductivity 234-286µs

Nutrient Added 120N 61P 199K

CODE	DESCRIPTION	SIZE	PRICE
LEV75M1PBLNPR	Levington M1 Low Nutrient	75 L	

Levington® Pot & Bedding Med nutrient M2

- Designed to grow a wide variety of pot and bedding plants
- Good quality nutrient supply for feeding of up to four weeks
- Cell packs and small pots up to 9cm
- pH range 5.3-6.0
- 20% Fibagro Advance

Particle Size 0-10mm

Conductivity 228-414µs

Nutrient Added 192N 98P 319K

CODE	DESCRIPTION	SIZE	PRICE
LEV75M2PBMNPR	Levington M2 Med Nutrient	75 L	

Levington® Pot & Bedding High nutrient M3

- Designed to grow a wide variety of pot and bedding plants
- Good quality nutrient supply for feeding of up to four weeks
- Cell packs and small pots up to 9cm
- pH range 5.3-6.0
- 20% Fibagro Advance

Particle Size 0-10mm

Conductivity 355-435µs

Nutrient Added 204N 104P 339K

CODE	DESCRIPTION	SIZE	PRICE
LEV75M3PBHNPR	Levington M3 High Nutrient	75 L	

Grow

Levington® Advance

Container Nursery Stock

Off-the-shelf standard mix for container nursery stock. Taken as the industry standard over many years, ICL continue to invest in the development of their growing media. Making it not only the most technologically advanced growing media but also the best value.

Levington® CNS General

- Levington CNS General is made up of a blend of 0-10mm and 6-12mm particles of peat. This allows it to flow readily into smaller pots yet retain a reasonable open structure for drainage
- For use in 9cm pots for liners up to 2 litre pots
- pH range between 4.8-5.3, together with a low level of start fertilizer



Blended particle sizes 40% 0-10mm / 60% 6-12mm

Conductivity 150-250µs

Nutrient Added 90N 46P 150K				
CODE	DESCRIPTION	SIZE	PRICE	
LEV75CNSG	Levington CNS General	75 L		

Adjuvant - Elasto G5

Elasto G5 is a safe and reliable adjuvant to support ornamental crop production with scientificallt proven technology and experience behind it.

Safe

- Low risk of phytotox
- Low risk for beneficial insects
- Reduced risk of run-off

Reliable

- Improved retention, coverage and uptake of crop protection products
- Significant research and technical support in the UK

Flexible

- **Enhanced efficacy improves** plant health
- Helps to meet retail requirements with potential for reduced chemical applications



CODE	DESCRIPTION	SIZE	PRICE
ZELG55L	Elasto G5	5L	

Nurture

Osmocote® Exact

High K

Osmocote Exact High K helps provide quality flowering plants which are compact with good leaf colouring. This is essential in order for growers to maximise return on investments through sales.

12-7-19+TE



Advantages of using Osmocote Exact High K

- Good results for compact growth; ideal N / K ratio, combined with Low P (reduced stretching)
- Plant roots develop very well with new High K because of optimal EC first weeks after potting
- Excellent leaf shine and colour, thanks to the full trace element package + ultimate Iron release
- Includes Double Coating Technology (DCT) for better nutrient release throughout the growing season

CODE	DESCRIPTION	SIZE	PRICE
FEROSEHK0506	Osmocote Exact High K 5-6mth	25kg	
FEROSEHK0809	Osmocote Exact High K 8-9mth	25kg	
FEROSEHK1214	Osmocote Exact High K 12-14mth	25kg	

Osmocote® Exact

Hi.End

Osmocote Exact Hi.End is the latest 4th generation controlled release fertilizer from ICL. By incorporating Double Coating Technology (DCT). Due to Osmocote Hi. Ends 'programmed release', nutrient supply optimally matches plant needs. Meaning it delivers nutrients when the plant needs it later in the growing season.

15-9-12+2MgO+TE 5-6m 15-9-11+2MgO+TE 8-9m 15-8-11+2MgO+TE 12-14m



Advantages of using Osmocote Exact Hi.End

- Improves crop quality, helps improve yields and ultimately increases 'return on investment'
- GREAT VALUE Provides an integrated fertilizer boost saving time and money on additional applications during the growing season
- Environmentally safe less leaching into water systems
- Due to the higher nutrient release in the second growing phase that matches plant needs, plant growth optimised
- Works well for autumn and early spring potting

CODE	DESCRIPTION	SIZE	PRICE
FEROSEHE0506	Osmocote Exact Hi.End 5-6mth	25kg	
FEROSEHE0809	Osmocote Exact Hi.End 8-9mth	25kg	
FEROSEHE1214	Osmocote Exact Hi.End 12-14mth	25kg	

Nurture

Osmocote® Exact

Standard

Osmocote Exact Standard products employ proven 3rd generation technology, providing the assurance of quality, safety and uniformity throughout the growth season and, if desired, patterned release.



16-9-12+TE 3-4m 15-9-12+2MgO+TE 5-6m 15-9-11+2MgO+TE 8-9m & 12-14m

Advantages of using Osmocote Exact Standard

- Highest possible controlled release and safety fertilizer
- All essential trace elements
- Part of the granules are colour-coded according to longevity to avoid
- Very consistent, every bag gives identical results

CODE	DESCRIPTION	SIZE	PRICE
FEROSES0304	Osmocote Exact Standard 3-4mth	25kg	
FEROSES0506	Osmocote Exact Standard 5-6mth	25kg	
FEROSES0809	Osmocote Exact Standard 8-9mth	25kg	
FEROSES1214	Osmocote Exact Standard 12-14mth	25kg	

Osmocote® Pro

Osmocote Pro is a 2nd generation controlled release fertilizer with a high NPK content. Containing all necessary trace elements it has a fixed release pattern.



19-9-10+2MgO+TE 3-4m & 5-6m 18-9-10+2MgO+TE 8-9m & 12-14m

Advantages of using Osmocote Pro

- 100% coated NPK, Mg and trace elements, plants are supplied with all required nutrients during the whole crop cycle
- Offers good value for money
- Has a high NPK content
- Safe, reliable and easy to use

CODE	DESCRIPTION	SIZE	PRICE
FEROSP0304	Osmocote Pro 3-4mth	25kg	
FEROSP0506	Osmocote Pro 5-6mth	25kg	
FEROSP0809	Osmocote Pro 8-9mth	25kg	
FEROSP1214	Osmocote Pro 12-14mth	25kg	

Nurture

Osmocote® Exact


Mini

Specially developed for use in small substrate volumes. Osmocote Exact Mini is ideal for pots smaller then 8cm, for example plugs and trays with small compartments. With a granule size 0.85 to 2.0mm, this product guarantees optimum distribution of nutrients in substrate. The granules are so small that good distribution can be achieved even in volumes starting at 20ml.

16-8-11+2MgO+TE

Advantages of using Osmocote Exact Mini

- The reliability of Osmocote Exact, but for pots with small volumes
- Uniform plant growth, thanks to good granule distribution
- 100% coated and therefore 100% safe for plants
- Every granule contains all the nutrients
- Easy, accurate dosing
- Very easy to apply



CODE	DESCRIPTION	SIZE	PRICE
FEROSEM0304	Osmocote Exact Mini 3-4mth	10kg	
FEROSEM0506	Osmocote Exact Mini 5-6mth	10kg	

Osmocote® Exact

Tablet

Osmocote Exact Tablets offer convenience and very accurate rates of nutrients. Due to their cone-like shape, the tablets can be easily pushed into the growing media. As with Osmocote Exact, the longevity is instantly recognized by the colour of the granules in the tablets. Tablets are available in 5 gram and 7.5 gram formats.



14-8-11+2MgO+TE

Advantages of using Osmocote Exact Standard products

- Safety: highest possible safety, controlled release and high level of all essential trace elements. Colour-coded for longevity to avoid mistakes
- Consistency: highly consistent, every box of product gives identical results thanks to excellent quality control exceeding all industry standards
- Patterned release: available in various release patterns, exactly tailored to crop requirements, to provide optimal plant growth. Very efficient and therefore environmentally friendly

CODE	DESCRIPTION	TABLET	SIZE	PRICE
FEROSET50506	Osmocote Exact Tablet 5-6mth	5grm	7.5kg	
FEROSET70506	Osmocote Exact Tablet 5-6mth	7.5grm	7.5kg	
FEROSET50809	Osmocote Exact Tablet 8-9mth	5grm	7.5kg	
FEROSET70809	Osmocote Exact Tablet 8-9mth	7.5grm	7.5kg	

ICL PROFESSIONAL HORTICULTURE

Nurture

Osmocote® Bloom

Osmocote Bloom controlled release fertilizer for bedding plants is specifically designed for annuals in small pots.

12-7-18+1.5MgO+TE



Advantages of using Osmocote Bloom

- NPK ratio of 2:1:3 is perfect for condensed growth of bedding plants
- Mini granule ideal for mixing in small pots and packs
- · Lower fertiliser inputs so environmentally friendly
- Easy to use, at full rates no need for water soluble fertilizers
- Improves shelf life of bedding plants in trade and consumer phases

CODE	DESCRIPTION	SIZE	PRICE
FEROSB0203	Osmocote Bloom 2-3mth	25kg	

Osmocote® Start

Osmocote Start is designed as a starter fertilizer for crops with a short cultivation cycle. Fully coated, it has an NPK composition of 11-11-17 and contains all essential trace elements. Refined coatings enable uniform and controlled supply of nutrients to plants with a lower EC, even during shorter growing periods.



11-11-17+2MgO+TE

Advantages of using Osmocote Start

- Specialist product for slow growing plants with long cropping cycle
- · Promotes improved rooting and crop colour
- Safe to use, no salt stress
- Easy to apply and dust-free

CODE	DESCRIPTION	SIZE	PRICE
FEROSS-25KG	Osmocote Start	25kg	

Osmocote® Topdress

Osmocote Topdress FT (Fusion Technology) 4-5 month is our coated fertilizer specifically designed for topdress applications in container nursery stock.

Simple things are often the best. Knowing that container nursery stock plants tend to fall over in windy conditions, Osmocote Topdress FT contains a component which makes the granules stick to the growing media.



22-5-6+2MgO+TE

Advantages of using Osmocote Topdress

- Contains fast and slow release nitrogen and phosphorous
- Fine granule size for an even distribution
- Sticks to the growing medium no loss of granules if the pot is blown over
- Contains extra trace elements for greening effect

CODE	DESCRIPTION	SIZE	PRICE
FEROSTD0405-25KG	Osmocote Topdress 4-5mth	25kg	

Nurture

Micromax® Premium

Micromax Premium is a fine granular fertilizer with trace elements, which are essential in order to obtain optimum plant growth. The unique formula also increases the efficiency of the major elements.

B+Cu+Fe+Mn+Mo+Zn



Product Advantages

- · Well balanced combination of trace elements
- Superior product for containerized crops. Perfect start-up effect
- Long lasting supply of trace elements to the plants, up to 16 months
- Stimulates rooting, strong and healthy crops

CODE	DESCRIPTION	SIZE	PRICE
FERMP-25KG	Micromax Premium	25kg	

Micromax® Fe

Micromax Fe is a premium fully water-soluble fertilizer, consisting of EDDHA-chelated iron plus X3, a biostimulant that enhances absorption of the Fe-chelate compound into plant leaves resulting in optimum nutrient uptake.

6% Fe



Product Advantages

- Fe deficiency disappears within a few days
- Promotes rapid absorption of the Fe enclosed, into the crop's leaves and roots
- Enhances plant photosynthesis and other metabolic functions
- Can be tank-mixed with a wide range of other fertilizers and crop-protection compounds

CODE	DESCRIPTION	SIZE	PRICE
FERMFE	Micromax Fe	5kg	

Micromax® TE Mix

Micromax TE Mix is a premium water-soluble trace element mix, consisting of all major trace-elements (TE), whereby all cationic ones are present in chelated form.

B+Cu+Fe+Mn+Mo+7n



Product Advantages

- Prevents deficiencies via a well-balanced composition of essential trace elements
- Stimulates rooting and performs a base for healthy plant growth
- Dissolves quickly and totally, so that solution preparation is easy and trouble-free
- Contains X3, a specific biostimulant that enhances an effective nutrient uptake
- EDTA and DTPA are powerful chelating agents, Mn-EDTA is 2 to 5 times better available to plant than non-chelated Manganese (eg Manganese Sulphate)

CODE	DESCRIPTION	SIZE	PRICE
FERMTE	Micromax TF Mix	5ka	

Nurture

Peters® Excel

Soft Water Range

Peters Excel products feature unique formulations delivering complete plant nutrition using a single-concentrate stock tank, while taking into account the quality of irrigation water. This helps minimise labour, reducing overall costs while improving quality. All Peters Excel products are completely water soluble, keeping irrigation systems clean.

CalMag Grower

15-5-15+7CaO+3MgO+TE

CalMag Grower has a balanced N:K ratio that is engineered to promote healthy growth. It is a single-tank mix formula containing all the necessary nutrients plants require. CalMag Grower is also compatible with calcium nitrate.



CalMag Finisher

13-5-20+7CaO+2MgO+TE

CalMag Finisher is a single-tank mix fertilizer providing plants with all the essential nutrients required. It is often used as a follow-up to CalMag Grower. It has a high potassium formula that leads to compact and condensed growth.



Features and benefits of Peters Excel **CalMag Grower**

- Especially developed for use in soft water, unique in its effects
- Healthy growth as a result of continuous supply of calcium and magne-
- Reliable system thanks to selected composition of raw materials and chelated trace elements
- High level of chelated trace elements ensures perfect colour and growth
- Single-tank mix concept: all nutrient elements in a single storage tank, including calcium

CODE	DESCRIPTION	SIZE	PRICE
FERPEG150515	Peters Excel Grower	15kg	
FERPEF130520	Peters Excel Finisher	15kg	

Universol®

Universol is a great value water soluble fertilizer for pot, bedding and all container nursery stock. Trusted by growers, the Universol range helps to consistently deliver high quality plants. Universol is colour dyed for ease of use.

Universol Blue

18-11-18+2.5MgO+TE

Well balanced mid-season growth

Universol Blue has a balanced NPK ratio and elevated amounts of trace elements to help ensure even growth in the middle of the season. Additionally, it will help to increase the development of the plant. It is a balanced formula to use after Universol Yellow.



Nurture

Universol Yellow

12-30-12+2.2MgO+TE

Boost root and shoot bud growth

Universol Yellow gets plants off to a good start. Containing a high amount of phosphate it gives a valuable early boost to root and shoot bud growth. Apply once or twice soon after potting young plants to aid establishment.



Universol Green

23-6-10+2.7MgO+TE

Nitrogen boost for extra growth

Universol Green contains a high level of nitrogen to boost growth. It contains the perfect balance of readily available nitrate nitrogen and ammonium nitrogen to promote medium to long term growth. Universol Green is best to apply at the beginning of the crop cycle, just after completing Universol Yellow.



Universol Orange

16-5-32+3.4MgO+TE

Slower growth to promote flowering

Universol Orange is an effective, high-quality water soluble fertilizer which dissolves very quickly for immediate use. While helping to slow down plant growth, it encourages flowering. Packed with potassium, Universol Orange is great to use on flowering pot and bedding plants. It is also ideal to use if there is excess nitrogen in the irrigation water.



Universol Violet

10-10-30+3.3MgO+TE

Compact strong early growth

Universal Violet contains high levels of potassium encouraging compact and strong growth, great leaf colour, and excellent flower development. Ideal to use for slowing down plant growth, it can be used as a holding feed. Additionally, it will help balance out nutrition if nitrogen is present in the irrigation water.



CODE	DESCRIPTION	SIZE	PRICE
FERUB	Universol Blue	25kg	
FERUY	Universol Yellow	25kg	
FERUG	Universol Green	25kg	
FERUO	Universol Orange	25kg	
FERUV	Universol Violet	25kg	

fax: 01772 815417

Nurture

Universol®

Soft Water Range

Our three new Universal Soft Water products have been developed for application in soft irrigation water and contain NPK, Mg, Ca and a full package of trace elements.

Universol Soft Water 312R

18-7-12+6CaO+2MgO+TE

With a nitrogen aimed N:K ratio of 3:2 and high calcium, Universol Soft Water 312R is ideal for foliar crops and for the early growing phase. This product can be mixed with calcium nitrate.

Note: mix up to a maximum 50:50. Before adding the CaNo₃, first dissolve the Universol.



Universol Soft Water 213R

14-7-22+5CaO+2MgO+TE

With a potassium aimed N:K ratio of 2:3, this product is ideal for flowering crops and compact growth. Universol Soft Water 213R can be mixed with calcium nitrate making it possible to create a N:K ratio of 1:1.



Universol Soft Water 113R

11-11-31+2CaO+2MgO+TE

With a high potassium aimed N:K ratio of 1:3, this formulation is ideal for flowering crops and to harden off crops in their final growth phase.



Advantages of Universol Soft Water

- Contains all elements; NPK, magnesium, trace elements and even calcium
- Always the same composition thanks to stringent quality control
- Quick effect due to strong, fast performance
- Dissolves entirely and quickly because of the special ingredients and the 'Bright Solution System'
- Excellent value for money
- Always a suitable analysis for your crop
- Healthy growth as a result of continuous supply of calcium
- Improves the quality of the irrigation water

CODE	DESCRIPTION	SIZE	PRICE
FERUSW312R	Universol Soft Water 312R	25kg	
FERUSW213R	Universol Soft Water 213R	25kg	
FERUSW113R	Universol Soft Water 113R	25kg	

Nurture

Universol®

Hard Water Range

Our two new Universol Hard Water products have been developed for application in hard irrigation water, with high levels of bicarbonate.

Universol Hard Water 211

23-10-10+2MgO+TE

Hard Water 211 contains NPK, Mg and a full package of trace elements. With an N:K ratio of 2:1, it is ideal for plants requiring high amounts of nitrogen during the early growing phase.



Universol Hard Water 225

11-10-28+2MaO+TE

Hard Water 225 promotes compact growth in flowering plants and is ideal for hardening off plants, acidifying irrigation water and neutralizing bicarbonate. The N:K ratio of 2:5 means this product can be used in combination with water containing high nitrogen levels and with nitrogen fertilizers (eg Nitric acid).



Advantages of Universol Hard Water

- Contains all elements; NPK, magnesium, trace elements and even calcium
- Always the same composition thanks to stringent quality control
- Quick effect due to strong, fast performance
- Dissolves entirely and quickly because of the special ingredients and the 'Bright Solution System'
- Excellent value for money
- Always a suitable analysis for your crop
- Improves the quality of your irrigation water, by taking out bicarbonates
- The pH of the soil remains stable as a result of the HCO3- buffering effect

CODE	DESCRIPTION	SIZE	PRICE
FERUHW211	Universol Hard Water 211	25kg	
FERUHW225	Universol Hard Water 225	25kg	

Wetting Agent - H2Gro

H2Gro is a unique blend of surfactants based on 3D technology with a multi-matrix effect. It is a unique wetting agent based on a water conservation agent that holds the maximum amount of water to the previously water repellent materials and to other materials in the growing media.



H2Gro Granules

Advantages

- 3 in 1 mode of action wetting and spreading agent, penetrating agent and re-wetting agent
- Granular product gives long lasting effect

CODE	DESCRIPTION	SIZE	PRICE
WETHG-10KG	H2Gro Granules	10kg	
WETHG5L	H2Gro Liquid	5L	

LS SYSTEMS WATER SOLUBLES

Water-soluble Fertilisers

Our soluble fertilisers are specially formulated for quality crops in all types of plant feeding systems. A range of analyses provide the perfect balance for all cultures including bedding plants, pot plants and nursery stock. Speciality and bespoke mixes available on request.



STANDARD WATER

Code	Analysis	Use	Application rate	Amount ap- plied per ha per 10,000 litres of fertiga- tion given	EC of fertiga- tion solution (plus your local water EC)	SIZE	PRICE	
FERLSS120636	12-6-36	Finishing and Winter feed for bedding plants. Autumn	0.5g/litre C	5 kg C	0.65 mS/com	15kg Bucket		
FERLS3120030	12-0-30	feed for nursery stock. Late feed for salads/veg.	1.0g/litre P	10 kg P	1.30 mS/com	20kg Bag		
FERLSS150730	15-7-30	Summer and Autumn feed,	0.5g/litre C	5 kg C	0.6 mS/cm	15kg Bucket		
1 ENESS 130730	13-7-30	finishing feed for bedding plants	1.0g/litre P	10 kg P	1.2 mS/cm	20kg Bag		
FERLSS191919	19-19-19	Balance feed for growth stage for salads/veg and	0.5g/litre C	5 kg C	0.5 mS/cm	15kg Bucket		
TERESSISTISTS	15 15 15	container nursery stock.	1.0g/litre P	10 kg P	1.0 mS/cm	20kg Bag		
FERLSS220722	22-7-22	Spring and Summer feed. Growth feed for bedding and pot plants. General for	0.5g/litre C	5 kg C	0.5 mS/cm	15kg Bucket		
1 LNL33220722	22-1-22	salads/veg.	1.0g/litre P	1.0g/litre P 10 kg P	1.0 mS/cm	20kg Bag		
FERLSS280612	28-6-12	Spring and Summer boost feed to promote growth.	0.5g/litre C 1.0g/litre P	5 kg C	0.35 mS/cm 0.7 mS/cm	15kg Bucket		
1 21123200012	20012	spring and summer post reed to promote glown.	1.0g/litre P	1 -	10 kg P 15kg B	1.0 mS/cm	20kg Bag	

SOFT WATER

CODE	ANALYSIS	USE	Application rate	Amount ap- plied per ha per 10,000 litres of fertiga- tion given	EC of fertiga- tion solution (plus your local water EC)	SIZE	PRICE	
FERLSS120425S	12-4-25	Finishing and Winter feed, especially for Cyclamen	0.5g/litre C	5 kg C	0.5 mS/com	15kg Bucket		
1 ENESS 1204255	12 7 23	and Roses.	1.0g/litre P	10 kg P	1.0 mS/com	20kg Bag		
FERLSS130520S	13-5-20		0.75g/litre C	0.75g/litre C 7.5 kg C 0.75	7.5 kg C	0.75 mS/cm	15kg Bucket	
FERLSS1305205	13-5-20	Growth and finishing feed for flowering pot plants.	1.5g/litre P	15 kg P	1.5 mS/cm	20kg Bag		
FEDI CC150515C	15.5.15	County for all the set for Delinostries	0.75g/litre C	7.5 kg C	0.75 mS/cm	15kg Bucket		
FERL551505155	LSS150515S 15-5-15 Growth feed stage for Poinsettias.	1.5g/litre P 15 kg P	15 kg P	1.5 mS/cm	20kg Bag			

HARD WATER

CODE	ANALYSIS	USE	Application rate	Amount ap- plied per ha per 10,000 litres of fertiga- tion given	EC of fertiga- tion solution (plus your local water EC)	SIZE	PRICE								
FERLSS120636H	12-6-36	Finishing and Winter feed for bedding plants. Autumn	0.5g/litre C	5 kg C	0.68 mS/cm	15kg Bucket									
		feed for nursery stock. Late feed for salads/veg.	1.0g/litre P	10 kg P	1.0g/litre P 10 kg P	P 10 kg P 1.3	1.35 mS/cm	20kg Bag							
FERLSS150730H	15-7-30	Summer and Autumn feed,	0.5g/litre C 5	0.5g/litre C	0.5g/litre C	5 kg C	0.5g/litre C	0.64 mS/cm	15kg Bucket						
FERE3313073011	13-7-30	finishing feed for bedding plants	1.0g/litre P	10 kg P	1.28 mS/cm	20kg Bag									
FFDI CC101010II 10	10.10.10	Palance food for grouth stage			0.5g/litre C 5 k	0.5g/litre C 5 kg	0.5g/litre C 5 kg C	5 ka C	5 kg C	5 kg C	5 kg C	0.5g/litre C 5 kg C	0.43 mS/cm	15kg Bucket	
FERLSS181818H	18-18-18	Balance feed for growth stage.			10 kg P	0.85 mS/cm	20kg Bag								
FFDI (C20061211	28-6-12	C	0.5g/litre C	0.5a/litre C 5.ka C	0.5g/litre C 5 kg C	0.5a/litre C 5 ka C	0.68 mS/cm	15kg Bucket							
FERLSS280612H	28-0-12	Spring and Summer boost feed to promote growth.	1.0g/litre P	10 kg P	1.35 mS/cm	20kg Bag									

HORTIFEEDS COMPLETE NUTRITION FOR PLANTS

HortiBoost

HortiBoost takes plant nutrition beyond conventional fertilisers by combining a unique, powerful package of 19 essential amino-acids, humic acid complex, seaweed and also major and minor nutrients from organic and inorganic sources.

HortiBoost is fast-acting, with absorption into the crop within 12 to 24 hours while facilitating maximum utilisation of nutrients, water, CO_2 and light to maximise growth efficiency.

Can be used on a wide range of crops including:

- Fruits
- Vegetables
- Salad crops
- Vines
- · Plants in propagation
- All ornamentals

CODE	DESCRIPTION	SIZE	PRICE
FERHHBO10L	HortiBoost	10 L	

HortiPhyte

4-25-16

A revolutionary liquid fertiliser containing fast-acting, highly mobile phosphite (PO3) molecules, rather than usual phosphate (PO4). Its effect is to increase the rate of energy transfer within the plant, resulting in increased root and shoot initiation and development and improved yields and fruit quality.

HortiPhyte is recommended for a wide range of crops including:

- Strawberries and other soft fruit
- Cucumbers, courgettes and squashes
- Pot and bedding plants
- Grape vines
- · Shrubs and trees
- · Vegetable plants at transplanting
- Edible and ornamental propagation



CODE	DESCRIPTION	SIZE	PRICE
FERHHOPH010L	HortiPhyte	10 L	

NuGro

8-8-7

Organic liquid foliar fertiliser for all edible crops. Derived from fish blood and bone, NuGro 8-8-7 provides a balanced NPK together with all the key secondary and trace elements needed for healthy plant growth.





CODE	DESCRIPTION	SIZE	PRICE
FERHHNG10L	NuGro	10 L	

HortiHydrate Pro

Formulated using the latest surfactant technology, HortiHydrate Pro lowers production costs and increases profit margins, by enabling plants to grow faster, more uniformly and with less water.

- Improves water and nutrient uptake
- Reduces production costs
- Plants grow faster
- Safe for sensitive plants and seedlings
- Specially developed for horticultural growers
 - Also available in 10L, 20L and 200L containers



CODE	DESCRIPTION	SIZE	PRICE
FERHHP5L	HortiHydrate Pro	5 L	

Ametros

Lettuce and leafy salad

Ametros is an advanced foliar spray containing our patented CaT technology. This optimises calcium mobility for improved quality and storage of lettuce and leafy salad crops.

Benefits of Ametros

- Improved crop quality, storage and shelf-life
- Increased head weight
- Increased calcium content
- Reduction of tip burn and calcium disorders
- Less crop waste and more marketable yield
- Compatibility with other AgChem foliar sprays

CODE	DESCRIPTION	SIZE	PRICE
FERHAME10L	Ametros	10 L	

HortiGran Beds & Borders

10-11-15

Ideal fertiliser for bedding displays, herbaceous plants and shrubs. Comes in handy 5kg and 10kg buckets and 20kg bags.



CODE	PRICE
FERHHG05KG	
FERHHG10KG	
FERHHG20KG	

HortiGran Tree Planter

12-20-8

Fertiliser for use in tree pits and for surface dressing around trees. Comes in handy 5kg and 10kg buckets and 20kg bags.



CODE	PRICE
FERHTP05KG	
FERHTP10KG	
FERHTP20KG	

OMEX NUTRITIONAL PRODUCTS

HORTICULTURE

O-Phyte

A biostimulant based on phosphite.

To stimulate plant growth and improve the uptake and systemic movement of nutrient cations within the plant.

Improved root growth and crop establishment. Improved nutrient uptake.



CODE	DESCRIPTION	SIZE	PRICE
FERTOPHYT20L	Omex O-Phyte	20 L	

Zynergy®

This specially formulated combination of highly available copper and zinc is designed to form a key part of an integrated crop management programme to boost crop health and maximise yield potential.

Crops: A wide range of crops including soft and top fruit, protected edibles, lettuce, cucumber and ornamentals.



CODE	DESCRIPTION	SIZE	PRICE
FERTOZYNE5L	Omex Zynergy	5 L	

Kelpak[®]

Organic growth stimulant used to enhance root growth which improves both yield and quality. Kelpak helps plants overcome periods of stress caused, for example, by drought, waterlogging or root damage.

Crops: All glasshouse crops, soft fruit, cut flowers, salads, all ornamentals and amenity turf.



CODE	DESCRIPTION	SIZE	PRICE
FERTOKELP5L	Omex Kelpak	5 L	
FERTOKELP25L	Omex Kelpak	25 L	

CalMax® Ultra

Calcium deficiency is the major cause of a number of disorders including bitter pit in apples, fruit splitting and cracking; tip burn in lettuce and blossom end rot in tomatoes.

Omex has developed a unique formulation of calcium to overcome this problem. Using eba™ technology, CalMax Ultra plus a 'pump primer' that ensures the calcium can be actively transported into plant cells even during difficult periods of low metabolic activity and stress.



CODE	DESCRIPTION	SIZE	PRICE
FERTOCALMU5L	Omex CalMax Ultra	5 L	

Bio 20

20-20-20

Bio 20 is a 20-20-20 NPK concentrated emulsion fertiliser containing a unique package of organic plant growth stimulants and fully chelated trace

Use: As a general foliar or liquid feed and plant growth stimulant, particularly in times of stress. As growth conditioner and size enhancer.



CODE	DESCRIPTION	SIZE	PRICE
FERTOBIO2010L	Omex Bio 20	10 L	

Vitomex[®]

An inorganic formulation of phosphorus, potassium, copper, magnesium and zinc.

Crops: All horticultural crops including bedding, nursery stock, module grown vegetables, soft fruit and top fruit.



CODE	DESCRIPTION	SIZE	PRICE
FERTOVITA5L	Omex Vitomex	5 L	

SW7 Adjuvant

New Impoved Formulation

A silicon based non-ionic wetting and spreading agent, and a source of silicon in the crop.

Use: to improve uptake of foliar nutrients on crops that are difficult to achieve good coverage, with waxy or tight layers of leaves or dense canopies.

Crops: All agricultural and horticultural crops especially fruit, vegetables, protected salad crops and potatoes.



CODE	DESCRIPTION	SIZE	PRICE
FERTOSW71L	Omex SW7 Adjuvant	1 L	

Kobra

A highly effective pesticide wetting and spreading agent for use in agricultural, horticultural and forestry crops.

Use

- 1. To improve foliar uptake of acaricides, fungicides, insecticides and foliar nutrients through better distribution and drying.
- 2. As a dry wash to reduce visible residues prior to harvest or sale.
- 3. As a growing media wetter/re-wetter, through drip or overhead irrigation, or as a drench.



CODE	DESCRIPTION	SIZE	PRICE
FERTOKOBR5L	Omex Kobra	5 L	
FERTOKOBR200L	Omex Kobra	200 L	

ORGANIC FERTILISERS

6x Pelleted Poultry Manure


100% NATURAL FERTILISER

Concentrated, easy to spread and odourless, our pelleted chicken fertiliser is available in two convenient sizes.

One or two handfuls per square metre for vegetables, soft fruits, flowers. A dissolved handful in one gallon of water for an excellent liquid feed. Scatter a handful on each layer of garden waste to enrich compost. Also ideal for lawn feed at one handful per square metre.

- The ideal feed for flowers, lawns, vegetables, trees and roses
- Highly concentrated use handfuls not barrow loads
- · Weed and bug-free easy to use pellets
- With trace elements to feed the soil

Analysis



CODE	DESCRIPTION	SIZE	PRICE
VIT08GO6X	6x Pelleted Poultry Manure tub	8 Kg	
VIT20GO6X	6x Pelleted Poultry Manure bag	20 Kg	

Sulphate of Iron Granular

A long lasting iron feed for trees, shrubs and flowers. Can be used on acid-loving plants.

Mini-granular formulation. Can be used as a base or top dressing.



CODE	DESCRIPTION	SIZE	PRICE
SIN25SI	Sulphate of Iron	25kg	

Rose Food

4-3.5-7 + TE

Rose food can be used to feed established roses or other flowering plants and when planting new roses.

Pellet formulation. Helps prevent diseases.



CODE	DESCRIPTION	SIZE	PRICE
SIN25RF	Rose Food	25kg	

Growmore

7-7-7

A balanced general purpose plant food which provides equal amounts of the major nutrients required for strong, healthy growth. It is suitable for most types of flowers and ideal for feeding fruit and vegetables.



CODE	DESCRIPTION	SIZE	PRICE
FEREGM25	Growmore	25kg	

Fish Blood & Bone

An organic-based general purpose plant food which provides the major nutrients required for strong healthy growth.



CODE	DESCRIPTION	SIZE	PRICE
FEREFBB25	Fish Blood & Bone	25kg	

Bonemeal

A natural organic slow-acting plant food. It is rich in phosphorus, which stimulates root growth, making it ideal for use when planting trees, shrubs and herbaceous plants.



CODE	DESCRIPTION	SIZE	PRICE
FEREBM25	Bonemeal	25kg	

STRAIGHT INORGANIC FERTILISERS

Glasshouse Fertilisers

For A+B Tank Systems / Two Tank Systems. Crop specific recipe's available on request.



YaraTera

KRISTA K

Yara glasshouse fertilisers are free flowing, fine crystalline powders which dissolve quickly in water without any residues. They are all suited to application through all fertigation systems - hydroponics, drip systems, low throw sprinklers, centre pivots and spray units.

Yara Tera

YaraTera


YaraLiva™

CALCINIT™ 15.5%N + 26.3%CaO

Soluble grade calcium nitrate

Pack size » 25kg bags

and calcium fertiliser.



YaraTera™

KRISTA MAG 11-0-0 + 15%MgO

Soluble grade magnesium nitrate

Pack size » 25kg bags

Krista-Mag is a fully water soluble nitrogen and magnesium fertiliser.

CODE	DESCRIPTION	SIZE	PRICE	
FERKMN25	Magnesium Nitrate	25kg		
			,	•

YaraTera™

KRISTA MKP 0-52-34

Soluble grade mono potassium phosphate

Pack size » 25kg bags

K р m ra

phosphorus a making it part	a fully water soluble nd potassium fertiliser cicularly suited to a wide cultural crops.		
CODE	DESCRIPTION	SIZE	PRICE

CODE	DESCRIPTION	SIZE	PRICE
FERKMPP25	Mono Potassium Phosphate	25kg	

YaraTera™

KRISTA MAP 12-61-0

Soluble grade mono ammonium phosphate

Pack size » 25kg bags

Krista-MAP is a fully water soluble nitrogen and phosphorous fertilizer. It is ideally suited for applications in hydroponics.



		41111	
CODE DESCRIPTION		SIZE	PRICE
FERKMAP25	Mono Ammonium Phosphate	25kg	

YaraTera™

KRISTA K PLUS 13.7-0-46.3

Soluble grade potassium nitrate

Pack size » 25kg bags

Krista-K is a fully water soluble nitrogen and potassium fertiliser.

				0	d
CODE	DESCRIPTION	SIZE	PRICE		25 kg
FERKPN25	Potassium Nitrate	25kg			

YaraTera™

KRISTA MGS 16%MgO + 13%S

Soluble grade magnesium sulphate

Pack size » 25kg bags

Krista MgS is a fully water soluble sulphur and magnesium fertiliser.



Yara Tera

KRISTA" SOP

CODE	DESCRIPTION	SIZE	PRICE
FERKMS25	Magnesium Sulphate	25kg	

YaraTera™

KRISTA SOP 0-0-51%K + 18%S

Soluble grade potassium sulphate

Pack size » 25kg bags

- Krista-SOP is suitable for fertigation.
- Ideal where high potassium levels are required without additional nitrogen.
- Suitable for crops with a high sulphur demand.
- Very low chloride content.
- Highly soluble, dissolves very quickly.

CODE	DESCRIPTION	SIZE	PRICE
FERKSP25	Potassium Sulphate	25kg	

YaraTera™

KRISTA MOP 0-0-46

Soluble grade potassium chloride

Pack size » 25kg bags

Krista-MOP is a fully water soluble potassium chloride fertiliser.



CODE	DESCRIPTION	SIZE	PRICE
FERKPC25	Potassium Chloride	25kg	

STRAIGHT INORGANIC FERTILISERS

Krista™ CaCl

28% Calcium (Ca) + 50% Chloride (Cl)

Soluble grade calcium chloride

Pack size » 25kg bags

A readily soluble material in the form of white hygroscopic flakes. The product is suitable as a soluble calcium source for use in hydroponics and fertigation.



CODE	DESCRIPTION	SIZE	PRICE
FERKCC25	Calcium Chloride	25kg	

YaraLiva™

TROPICOTE 15.5%N + 19%Ca

Field grade calcium nitrate

Pack size » 600kg / 25kg bags Brassica/salad

- Helps to suppress Club Root
- Helps prevent Internal Browning
- Helps prevent Tip Burn
- Low scorch risk when broadcast
- Improved marketability and shelf life



CODE	DESCRIPTION	SIZE	PRICE
FERYCN25F	Calcium Nitrate Field Grade	25kg	

PG Mix™

12-14-24 + 2MgO + TE

14-16-18 + 0.8MgO + TE

Complete fertiliser for peat based substrates

Pack size » 25kg bags

Yara PG Mixes are all-in-one powdered compound fertilisers, based on raw materials of extremely high quality, to turn ordinary peat into a high quality potting soil with even distribution of all nutrients. Easy to handle without segregation, dust or clogging.





CODE	DESCRIPTION	SIZE	PRICE
FERYPGM121424	PG Mix 12-14-24	25kg	
FERYPGM141618	PG Mix 14-16-18	25kg	

Dolomitic Lime

Dolomitic Lime 25 Kg

A liming agent in the form of calcium and magnesium carbonate, which provides a source of magnesium as well as raising the pH in composts and soils.

Extremely fine powdered dolomitic lime for adjusting pH of substrates.

1Kg of Dolofil per metre cube of compost will generally reduce the pH by 1 point.



Trucal 130

Ground Limestone 25 Kg

A low cost pH adjuster for the soil.



CODE	DESCRIPTION	SIZE	PRICE
FERKDOLM25K	Dolomitic Lime	25 kg	

CODE	DESCRIPTION	SIZE	PRICE
FERGL25T	Trucal 130	25 kg	

CROP PROTECTION CHEMICALS

FUNGICIDES

PRODUCT	MAPP NUMBER	ACTIVE INGREDIENT	CONTROL	MAXIMUM RATE	SIZE	PRICE
/ Amistar	18039	250g/l (23.1% w/w) Azoxystrobin	A broad spectrum fungicide. It has systemic, translaminar and protectant properties.	1.00 L per ha	5 L	
AQ10 in Sa Blofunguide	17102	Ampelomyces quisqualis strain AQ 10	A biofungicide containing a naturally occuring hyperparasitic fungus for reducing powdery mildew on protected crops of aubergine, courgette, cucumber, melon, pepper, pumpkin, tomato, strawberry, and winter squash.	0.07 Kg per ha	30 g	
FRUPICA SC	12067	Mepanipyrim	For the control of Botrytis cinerea on outdoor and protected strawberries.	0.90 L per ha	1 L	
KARMA	16363	850g/kg Potassium hydrogen carbonate	A water soluble powder for the useful control of apple scab. It also has an EAMU for powdery midlew on strawberries.	5 Kg per ha	5 Kg	
PRESTOP	17223	32% w/w Gliocladium catenulatum strain J1446	A biofungicide for the moderate control of gummy stem blight (Didymella sp.), grey mould (Botrytis sp.) damping off and root diseases caused by Pythium, Phytopthera, Rhizoctonia and Fusarium spp. on all edible crops (including strawberry) and all non edible crops (protected) and outdoor strawberry.	500 g per m³ compost or soil (incorpotated into the growing medium)	5 Kg	
PROPLANT	15422	722g/l Propamocarb hydrochloride	A semi-systemic carbamate fungicide with protective action against Pythium spp, Phytopthera spp and Peronospora parasitica on protected Brussels sprout, broccoli, calabrese and cauliflower.	5 ml/m² in 2-4 litres of water	1 L	
♣ Reflect	18573	125g/l isopyrazam	Controls Powdery Mildew (Erysiphe heraclei) and moderate control of Alternaria Leaf Blight (Alternarai dauci) in carrots; Powdery Mildew (Leveillula taurica, Oidium lycopersici) in protected tomato, aubergine, pepper and chilli; Powdery Mildew (Erysiphe cichoracearum, Sphaerotheca fuliginea) in protected cucumber, courgette, summer squash and melon.	Carrot: 1 L per ha Protected Crops: 0.1 L/100 litres	10 L	
REVUS	17443	250g/l (23.4% w/w) Mandipropamid	For the control of downy mildew on protected and outdoor lettuce, lamb's lettuce, endives (including frisee and escarole), chicory (radicchio), rocket, red mustard, salad greens, spinach leaves, land cress, cress, purslane, spinach beet leaves (chard) and herbs.	0.60 L per ha	10 L	
SEREMADE	16139	13.96g/I <i>Bacillus subtilis</i> strain QST 713	Reduction of fruit damage caused by grey mould (Botrytis cinerea).	10.00 L per ha	10 L	
SIGNUM	11450	26.7% w/w Boscalid and 6.7% w/w Pyraclostrobin	A fungicide with protectant and systemic activity for use against certain diseases in broccoli, brussels sprout, cabbage, calabrese, cauliflower, strawberry (outdoor and protected), carrot, lettuce (outdoor and protected), field beans, combining peas, vining peas and blackcurrants.	1.50 Kg per ha	2.5 Kg	
Subdue	12503	465.2g/l Metalaxyl-M	A systemic phenylamide fungicide with protectant and curative activity. For control of Pythium spp and Phytopthera spp on outdoor and protected ornamental crops and flower bulbs.	0.75-1.25 L per ha	250 ml	
SWITCH.	15129	37.5% w/w Cyprodinil and 25% w/w Fluxioxonil	Range of fungal diseases including some leaf spots, Botrytis and Sclerotinia. Suitable for use in wide variety of crops including beans, peas, top fruit, soft fruit and ornamentals.	0.80 Kg per ha	1 Kg	
T34 Biocontrol*	-	Trichoderma asperellum strain T34	A biofungicide for the reduction of Fusarium oxysporum f.sp. dianthi on carnations (Dianthus species).	5.00 Kg per ha	250g and 500g	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

CROP PROTECTION CHEMICALS

FUNGICIDES

Always Read The Label - Use Chemicals Safely

PRODUCT	MAPP NUMBER	ACTIVE INGREDIENT	CONTROL	MAXIMUM RATE	SIZE	PRICE
TAKUMI SC	16000	100g/l cyflufenamid	A suspension concentrate formulation for the control of powdery mildew on courgette, cucumber, melon and summer squash.	0.15 L per ha	150 ml	

HERBICIDES

Always Read The Label - Use Chemicals Safely

PRODUCT	MAPP NUMBER	ACTIVE INGREDIENT	CONTROL	MAXIMUM RATE	SIZE	PRICE
GLYPHOSATE	ТВС	- 360g/l Glyphosate	A foliar applied translocated herbicide for the control of annual and perennial grass and broad-leaved weeds before sowing or planting all crops. For use pre-harvest in cereals,	5.00 L per ha	5 L	
GEIFIIOSAIE	TBC	300g/i diypriosate	destruction of grassland, and in stubbles, orchards, green cover on land not being used for production, forestry and non-crop areas.	3.00 E per 11a	20 L	
DIAMOND	18832	160g/l 2,4-D / 240g/l glyphosate	lt controls annual and perennial weeds in amenity grassland, amenity vegetation, grassland, green cover on non-crop producing land, hard surfaces (railway ballast only), orchards and stubbles.	5.00 L per ha	1L and 5L	
FINALSAN	13102	186.7 g/l Perlargonic acid	A soluble concentrate formulation containing 186.7 g/l perlargonic acid for use as a non-selective herbicide. The Maleic hydrazide works as a plant growth regulator within the product.	166 L per ha	10 L	
FLEXIDOR	18042	500g/l (12.14% w/w) Isoxaben	A residual herbicide for the control of broad-leaved weeds in winter and spring wheat, barley and oats, rye, triticale, durum wheat, top, bush, cane fruit, strawberry, grapevine and hop, ornamental plant production, forestry and amenity vegetation.	0.5 L per ha	500 ml	
GRAZON PRO	15785	240 g/l Triclopyr & 60 g/l Clopyralid	A foliar acting herbicide for the control of perennial broad- leaved weeds including nettles, docks, thistles, brambles, broom and gorse in established grassland.	1.20 L per ha	1 L	
MOSSKADE	-	Plant derived starch, proteins, oils, lactic acid and water	Control of algae, moss, lichen and liverwort on nurseries, landscape and domestic situations. Works on hard surfaces, containerised nursery stock. A coating and contact agent working by physically coating.	1 part Mosskade to 7-10 parts water	1L, 5L & 10L	

GROWTH REGULATORS

PRODUCT	MAPP NUMBER	ACTIVE INGREDIENT	CONTROL	MAXIMUM RATE	SIZE	PRICE
Bonzi Gramental Growth Regulator	17576	4 g/l Paclobutrazol	Reduces vegetative growth on pot grown ornamental plants.	2.50 L in 100 L of water	1 L	
	16092	85% w/w Daminozide	Reduces internode elongation on chrysanthemum, azalea, hydrangea, bedding plants and some other ornamentals.	0.006 Kg in 1.00 L of water	1 Kg	

CROP PROTECTION CHEMICALS

DISINFECTANTS

Always Read The Label - Use Chemicals Safely

PRODUCT	MAPP NUMBER	ACTIVE INGREDIENT	CONTROL	MAXIMUM RATE	SIZE	PRICE
НҮРЕПОХ	-	Peracetic acid	Hyperox superior stabilised formulation provides greater ap- plication flexibility and broad spectrum activity with efficacy against viruses, bacteria, fungi and spores at low temperatures and in the face of organic challenge.	-	5 L and 20 L	
JET-5	-	Peroxyacetic acid	A powerful disinfectant for use in all areas of horticulture and agriculture for disinfection of all surfaces including glasshouses, tools, pots, trays, benches, equipment, paths, building stores and irrigation systems.	-	5L and 909L IBC	

INSECTICIDES, MITICIDES & MOLLUSCICIDES

PRODUCT	MAPP NUMBER	ACTIVE INGREDIENT	CONTROL	MAXIMUM RATE	SIZE	PRICE
APPLAUD 25 SC	17196	250 g/l buprofezin	A suspension concentrate formulation containing 250 g/ litre buprofezin for use as an insecticide for the control of glasshouse and tobacco whitefly.	1.0 L/ha	1 L	
AZATIN	18301	217 g/L azadiractin (formulated to achieve a concentration of 26 g/L Azadiractin-A) (EC)	An emulsifiable concentrate containing 217 g/L azadirachtin (formulated to achieve a concentration of 26 g/L azadirachtin-A) for the control of western flower thrips and onion thrips in protected ornamental, tree nursery and perennial crops.	1.4 L/ha (or 1.68L/ha for substrate raised roses only)	1 L	
BORNEO	13919	110 g/l Etoxazole	A contact and translaminar acaricide with residual activity to control spider mites.	0.025-0.035 L in 100 L of water	250 ml	
BOTANIGARD WP	17054	220 g/Kg Beauveria bassiana	For control of whitefly on various plants.	0.94 Kg per ha	500 g	
CONSER	12058	120 g/l (11.6% w/w) Spinosad	For the control of Western Flower Thrips in protected orna- mental plant production and protected crops of cucumber, tomato, pepper and aubergine.	0.08 L in 100 L of water	1 L	
decis **	16160	15 g/l (1.5%vw/w) Deltamethrin	A broad spectrum pyrethroid insecticide for the control of caterpillar, aphid, thrip and capsid in a wide range of crops. It also has SOLA's on protected mushroom, specific herbs, spring onion, celery, protected Chinese cabbage and other crops.	830 ml per ha	1 L	
DiPel*DF	18874	Bacillus thurengiensis var kurstaki (32,000 IU/mg)	A biological insecticide used for the control of caterpillars (Lepidoperous larvae) in vegetables, soft fruit, ornamentals and amenity vegetation.	1.00 Kg per ha	500 g	
DYNAMEC	18316	18 g/l (1.84% w/w) Abemectin with Cyclohexanol	For the control of two-spotted spider mite and western flower thrips in protected and outdoor flower crops and other ornamentals.	0.05 L in 100 L of water	250 ml and 1 L	

CROP PROTECTION CHEMICALS

INSECTICIDES, MITICIDES & MOLLUSCICIDES

PRODUCT	MAPP NUMBER	ACTIVE INGREDIENT	CONTROL	MAXIMUM RATE	SIZE	PRICE
FLORAMITE 240 SC	17958	240 g/l Bifenazate	A suspension concentrate for use as a selective acaricide on protected strawberries for control of the two-spotted spider mite.	0.60 L per ha	250 ml	
GAZELLE SG	13725	Acetamiprid	A broad spectrum neonicotinyl insecticide, with contact, translaminar and systemic activity for control of whitefly and aphids. Crop use on apples, pears, cherries, plums, tomatoes, peppers, aubergines and ornamentals.	0.25 Kg per ha	500 g	
MAJESTIK	17240	49% w/w Maltodextrin	A contact, physical acting insecticide for the control of all stages of mites, aphids, thrips, whitefly and leafhoppers in protected and outdoor crops of all fruit, vegetables and ornamentals.	25 ml per 1 L of water	5 L	
NATURALIS-L	17526	7.16% w/w Beauveria bassiana ATCC 74040	A bioinsecticide for the control of whitefly in all edible crops (protected) and ornamental plant production (protected). The product will also provide a reduction in thrips.	3.0 L per ha	1 L	
PITCHER GR	18126	A granular nematicide containing a minimum of 450 g/kg of Garlic extract	A granular nematicide formulation containing a minimum of 450 g/Kg of Garlic extract for application to turf root zone at time of re-construction (re-seeding), or as a topical applica- tion when grass has established.	240 Kg per ha once at seeding or 2 x 120 Kg per ha per year	10 Kg	
S ProTAC SF	-	Mixture of polymers, mainly silicone polymers, siloxanes and organic antioxidants.	Product with a physical mode of action to control a wide range of herbivorous insects and mites (pear psylla, aphids, scale insects, spider mites, rust mites, thrips and whiteflies).	0.5 L per 500 L of water	1 L	
PYRETHRUM 5EC	12685 18532	5% natural Pyrethrins	Approved for use against a wide range of pests including greenfly, whitefly, aphids, flea bettle and caterpillars.	275-1500 L per ha	250 ml and 1 L	
PLANT INVIGORATOR	-	Carbonic acid diamide/ urea	For control of a wide range of important pests including whitefly, aphid, spider mite and mealy bug. Also controls powdery mildew and is a plant stimulant. For use on edible and ornamental crops.	0.002 L in 1.00 L of water	1 L and 5 L	
SEQUOIA	18677	Sulfoxaflor	Professional fast acting and translaminar insecticide for control of aphids and whitefly on a named crop growing under permanent protection with full enclosure.	0.400 L per ha	250 ml	
SLUXX	16571	29.7 g/Kg Ferric phosphate	Used for slug and snail control in all edible and non edible crops. Ideal for use on nurseries and production units with high human/animal activity or in amenity plantings.	7.00 Kg per ha	20 Kg	
SPRUZIT	18434	4.59 g/l Pyrethrins	Contains pyrethrins and natural oil but no piperonyl butoxide. Useful for a range of pests such as caterpillars and leafhoppers especially in an IPM programme. Approved for all edible and non edible crops.	6.00-12.00 L per ha	10 L	

STICKY TRAPS & ROLLS

Colour Optimised Sticky Glue Traps

The Impact range of coloured sticky boards can attract and contain a broad spectrum of soft bodied insects. Regular monitoring of the sticky traps makes early detection of infestation possible.

Impact Yellow boards should be used for monitoring aphids, whitefly and







CODE DESCRIPTION		SIZE	PRICE
XAAZ805312	Impact Board Yellow	10cm x 25cm	

Impact Blue boards should be used for monitoring western flower thrips, Frankliniella occidentalis.



CODE	DESCRIPTION	SIZE	PRICE
XAAZ805314	Impact Board Blue	10cm x 25cm	

Sticky Rolls

Yellow or blue sticky roll (sticky on both sides) for monitoring flying insects with counting grid.

Dry traps are coated with silicone coated paper which is removed when the trap is positioned.



CODE	DESCRIPTION	SIZE	PRICE
XAAZ110910	Bug-Scan Roll [PK 5]	5cm x 100m	
XAAZ120302	Bug-Scan Roll [PK 3]	10cm x 125m	
XAAZ120303	Bug-Scan Roll [PK 2]	15cm x 125m	
XAAZ110319	Bug-Scan Roll [PK 1]	30cm x 100m	
XAAZ007068	Bug-Scan Roll [PK 3]	10cm x 125m	
XAAZ110321	Bug-Scan Roll [PK 1]	30cm x 100m	

Sticky Traps

Yellow or blue sticky traps (sticky on both sides) for monitoring flying insects with counting grid.

Dry traps are coated with silicone coated paper which is removed when the traps is positioned.





CODE	DESCRIPTION	SIZE	PRICE
XAAZ120103	Bug-Scan Yellow [PK 100]	12.5 x 10cm	
XAAZ110292	Bug-Scan Yellow [PK 10]	25 x 10cm	
XAAZ111393	Bug-Scan Dry Yellow [PK 20]	25 x 10cm	
XAAZ111394	Bug-Scan Dry Yellow [PK 20]	25 x 40cm	
XAAZ110296	Bug-Scan Blue [PK 10]	25 x 10cm	
XAAZ110294	Bug-Scan Blue [PK 20]	25 x 40cm	

Delta Trap

A multi season plastic trap for the monitoring and trapping of lepidopteran

Material: Corrugated polypropylene and sticky liner.

Packing: 1 trap, 1 wire hanger and 10 sticky liners.

Target pests: Small to medium sized moths and fruit flies, depending on the lure used.

Trap Density: Subject to application and plot size. For areas less than 2500m² use 2 traps/ha. For areas greater use 1 trap per ha to 2 traps per ha (dependant on size of area being monitored).





CODE	DESCRIPTION	PRICE
XAAZ007080	Delta Trap	
XAAZ300624	Sticky inserts for Delta Traps (10 inserts)	
XAAZSFL	Pheromone Lures (2 lures) for use with Delta Trap	

Droso Trap

The BioBest DROSO TRAP® has been developed as a reliable and selective method of trapping Drosophila suzukii. Once adults are trapped inside they eventually will be drowned in the liquid attractant. DROS'ATTRACT® when combined with the Droso Trap will catch an average of 3.3 times more Drosophila suzukii than other attractants, such as apple cider vinegar. This enables a fast and quick detection of the pest in many sensitive crops such as ber-

ries and orchards.



CODE	DESCRIPTION	PRICE
XAAZ300209	Droso Trap	
XAAZ007086	Dros'Attract 5L	

BIOLOGICAL CONTROL

DIODE T

Bumblebees [Bombus terrestis audax]

Distribute hives evenly in the greenhouse. In glass and plastic greenhouses use one introduction point per 1,000m². In polytunnels use two introduction points per 500m².

- · Ventilation system
- Beelock opening
- Biogluc bottle, sugar water solution



CODE	DESCRIPTION	PRICE
XAAZ006219	Standard Hive (B.t.a.) for tomatoes Pollination: 6 to 8 weeks Premium Hive (B.t.a.) c/w Pollen Tray Pollination: 6 to 8 weeks Premium Hive (B.t.a.) for soft fruit Pollination: 6 to 8 weeks Multi Hive consists of 3 colonies (B.t.a.) weatherproof Pollination: 4 to 6 weeks	
XAAZ006218		
XAAZ006217		
XAAZ120937		

Adalia bipunctata [Adalia-System: 100]

Adalia is a coccinellid, of which the larvae and adults are both excellent aphid predators. This ladybug eats a variety of aphid species. The mobile larvae can be used in different kinds of protected and open crops.



CODE	ADALIA-SYSTEM	PRICE
XAAZ301585	280 ml plastic box: 100 larvae Carrier: shredded paper	

Aphidius colemani [Aphidius-System]

Parastic wasp for control of Myzus persicae (green peach aphid) and Aphis gossypii (cotton aphid). It lays its eggs in adult aphids. An aphid parasitized by Aphidius swells to a brown-coloured mummy, from which a new parasite emerges after about 10 days.





CODE	APHIDIUS-SYSTEM	PRICE
XAAZ000065	AZ000065 30 ml tube: 500 mummies Carrier: buckwheat	
XAAZ301649	250 ml tube: 2,000 mummies Carrier: buckwheat	

Aphidius ervi [Ervi-System]

Parastic wasp for control of *Macrosiphum euphorbiae* (potato aphid). Similar in shape to *Aphidius colemani* but is twice as large.





CODE	ERVI-SYSTEM	PRICE
XAAZ301651	100 ml tube: 500 mummies Carrier: buckwheat	
XAAZ301653	250 ml tube: 2,000 mummies Carrier: buckwheat	

Aphidoletes aphidimyza [Aphidoletes-System]

Gall midge for aphid control.





4	CODE	APHIDOLETES-SYSTEM	PRICE
	XAAZ000080	125 ml tube: 1,000 pupae Carrier: vermiculite	
	XAAZ003077	250 ml tube: 2,000 mummies Carrier: vermiculite	
	XAAZ111889	1 L tube: 10,000 pupae Carrier: vermiculite	

Chrysoperla carnea [Chrysopa-System]

A native predator that often spontaneously occurs in crops. The females lay their eggs on leaves. The larvae are extremely voracious and feed on aphids but also other insects.



CODE	CHRYSOPA-SYSTEM	PRICE
XAAZ111961	XAAZ111961 500 ml tube: 1,000 larvae Carrier: buckwheat	
XAAZ110111	5 L bucket: 10,000 larvae Carrier: buckwheat	

Aphidius colemani/ervi [Aphidius-Mix-System]

Parastic wasps for control of several species of aphid.





CODE	APHIDIUS-MIX-SYSTEM	PRICE
XAAZ000270	100 ml tube: 750 mummies (250 ervi / 500 colemani) Carrier: buckwheat	

A. col./ervi/matric./Aphelinus [Aphi-Mix-System]

Parastic wasps for control of several species of aphid.





CODE	APHIMIX-SYSTEM	PRICE
XAAZ111966	100 ml tube: 750 pupae (125 ervi / 250 colemani / 250 Aphidius matricariae / 125 Aphelinus abdominalis) Carrier: buckwheat	

BIOLOGICAL CONTROL

Viridaxis xProtect

[OrnaProtect / VerdaProtect / BerryProtect]

OrnaProtect is designed to protect covered ornamental/vegetable/berry crops (in tunnels or glasshouses) against aphids using parasitic wasps. The mix of different species of parasitoids used in a preventative way allows an immediate control of the aphids as soon as they appear in the crop.

Releases - every 2-3 weeks Crop area covered per tube - 200m²





CODE	CALIFORNICUS-SYSTEM	PRICE
XAAZ120946	OrnaProtect for ornamental crops	
XAAZ111969	VerdaProtect for vegetable crops	
XAAZ111885	BerryProtect for berry crops	

Aphidius matricariae [Matricariae-System]

The parastic wasp Aphidius matricariae can parastize about 40 aphid species. It is mainly and excellent parasitoid of the green peach potato aphid (Myzus persicae) and closely related species.



CODE	APHIDIUS-SYSTEM	PRICE
XAAZ111973	30 ml tube: 500 mummies Carrier: sawdust	£27.40
XAAZ111976	250 ml tube: 5,000 mummies Carrier: sawdust	£198.23

Amblyseius andersoni [Andersoni-System]

The new predatory mite Amblyseius andersoni offers excellent perspectives in ornamental and fruit crops, tree nurseries and protected hortciculture for the control of pest mites. The predatory mites are delivered per 25,000 individuals in practical 1L cardboard tube with bran.



CODE	ANDERSONI-SYSTEM	PRICE
XAAZ000215	1 L tube: 25,000 adults Carrier: bran with factitious prey	



Amblyseius andersoni [Andersoni-Breeding-System]

The predatory mites can also be released in the crop by means of breeding sachets. Over a period of several weeks thousands of predatory mites will progressively emerge from the sachets via the pre-punched hole and gradually spread through the crop. Hang one sachet every 2 metres in a row of plants.



CODE	ANDERSONI-BREEDING-SYSTEM	PRICE
XAAZ000220	Andersoni sachets: 250 sachets Carrier: bran and factitious prey	

BioBox

Cardboard box for introducing beneficial insects in crops.

Supplied per 50 boxes in a plastic bag.



CODE	DESCRIPTION	PRICE
XAAZ004004	BioBox - 50	£11.38

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

BIOLOGICAL CONTROL

SUSTAINABLE CROP MANAGEMENT

Amblyseius californicus [Californicus-System]

Predatory mite for red spider mite control and is a valuable aid to *Phytoseiulus*. It is more tolerant of high temperatures and low humidity.



CODE	CALIFORNICUS-SYSTEM	PRICE
XAAZ111884	250 ml tube: 5,000 mites Carrier: vermiculite	
XAAZ005299	1 L tube: 25,000 mites Carrier: vermiculite	
XAAZ300608	100 breeding sachets Carrier: bran and factitious prey	
XAAZ111986	500 breeding sachets Carrier: bran and factitious prey	
·		

Phytoseiulus persimilis [Phytoseiulus-System]

Predatory mite for red spider mite control. An adult mite can eat five adult spider mites or 20 eggs or nymphs per day.



CODE	PHYTOSEIULUS-SYSTEM	PRICE
XAAZ301300	30 ml tube: 2,000 mites Carrier: vermiculite	
XAAZ301301	100 ml tube: 2,000 mites Carrier: vermiculite	
XAAZ301302	500 ml tube: 10,000 mites Carrier: vermiculite	
XAAZ301370	1 L tube: 20,000 mites Carrier: vermiculite	

Feltiella acarisuga [Feltiella-LV-System]

Feltiella is a gall midge species in which females deposit their eggs in spider mite hot spots. After approximately two days, orange yellow larvae emerge from the eggs and start devouring spider mites. Best used in combination with Phytoseiulus-System.



CODE	FELTIELLA-SYSTEM	PRICE
XAAZ000261	280ml introduction system: 250 pupae supplied on paper Carrier: wood shavings	

Delphastus pusillus[Delphastus-System]

Big infestations of whiteflies are difficult to control with parasitic wasps only. In certain crops the grower can count on the beetle *Delphastus pusillus*, which wipes out whitefly hot spots efficiently.



CODE	DELPHASTUS-SYSTEM	PRICE
XAAZ000105	30 ml tube: 100 beetles Carrier: filter paper	

Encarsia formosa [Encarsia-System]

Encarsia lays its eggs inside whitefly larvae. Parastized whitefly pupae turn black, which makes it easy to check parasitic wasp's activity. Instead of whiteflies, new parasitic wasps emerge from the black pupae. Encarsia also feeds on young whitefly larvae (host feeding). BioBest Encarsia-System is supplied as parasitized whitefly pupae on cardboard cards or as loose pupae. Both must be distributed evenly in the greenhouse.







CODE	ENCARSIA-SYSTEM	PRICE
XAAZ000122	100 pupae/card; 50 cards: 5,000 pcs	
XAAZ000121	100 pupae/card; 100 cards: 10,000 pcs	

Eretmocerus eremicus [Eretmocerus-System]

Like Encarsia, Eretmocerus is a small wasp that parastizes whitefly larvae. Eretmocerus is a valuable tool for the control of whitefly, because it is has specific advantages over Encarsia, it is more tolerant of higher temperatures and pesticide residues.



CODE	ERETMOCERUS-SYSTEM	PRICE
XAAZ000171	100 pupae/card; 50 cards: 5,000 pcs	

Encarsia formosa/Eretmocerus eremicus [Eret-Mix]

50% Encarsia formosa and 50% Eretmocerus eremicus; parasitic wasps for white-fly control.

CODE	ERETMIX-SYSTEM	PRICE
XAAZ000119	100 pupae/card; 50 cards: 5,000 pcs	
XAAZ111695	50 pupae/card; 100 cards: 5,000 pcs	
XAAZ000120	100 pupae/card; 100 cards: 10,000 pcs	

Macrolophus pygmaeus [Macrolophus-System]

The predatory bug *Macrolophus* is particularly effective as a whitefly predator. It has a preference for whitefly eggs and larvae. This light-green bug actively looks for prey. It also feeds on other insect pests such as aphids, red

spider mites and moth eggs.

Macrolophus is mainly used in tomato crops and combats both greenhouse whitefly and tobacco whitefly.

CODE	MACROLOPHUS-SYSTEM	PRICE
XAAZ000212	250 ml tube: 500 bugs Carrier: vermiculite	
XAAZ000219	250 ml tube: 500 nymphs Carrier: vermiculite	
XAAZ300851	Nutrimac with semolina 50g (food for predatory bugs)	





BIOLOGICAL CONTROL

Amblyseius cucumeris [Amblyseius/ABS-System]

Thrips can be effectively countered with the predatory mite Amblyseius cucumeris. This thrips predator actively looks for thrips larvae in the crop, pierces them and consumes their inner parts. BioBest's ABS-System is the ideal method to introduce A. cucumeris into a crop. From the breeding packs, the predators continuously

spread throughout the crop. Proper placement of breeding packs allows Amblyseius cucumeris to suppress the thrips population below and economic damage threshold. A. cucumeris is also vailable in convenient shaker bottles.







CODE	ABS-SYSTEM	PRICE
XAAZ000007	ABS-sachets: 250 sachets Carrier: bran with factitious prey	
CODE	AMBLYSEIUS-SYSTEM	PRICE
XAAZ000016	1 L tube: 25,000 mites Carrier: bran with factitious prey	
XAAZ002995	5 L bucket: 250,000 mites Carrier: bran with factitious prey	
XAAZ120952	5 L bucket: 500,000 mites Carrier: bran with factitious prey	
CODE	AMBLYSEIUS-VERMICULITE-SYSTEM	PRICE
XAAZ000014	1 L tube: 25,000 mites Carrier: mixture of vermiculite (min. 80%) and bran with factitious prey	
XAAZ003074	5 L tube: 125,000 mites Carrier: mixture of vermiculite (min. 80%) and bran with factitious prey	

Atheta coriaria [Atheta-System]

Rove beetle for sciarid and scatella control.



CODE	ATHETA-SYSTEM	PRICE
XAAZ000099	1 L tube: 500 beetles Carrier: mixed peat	

Amblyseius swirskii [Swirskii-Breeding-System]

The mite Amblyseius swirskii is an effective natural enemy of pests such as whitefly, thrips or spider mite. A. swirskii can be applied during the whole year and it adapts easily to high temperatures. Its ability to feed on pollen provides it with the opportunity for preventative action.



CODE	SWIRSKII-BREEDING-SYSTEM	PRICE
XAAZ005202	Swirskii sachets: 100 sachets Carrier: bran and factitious prey	
XAAZ111998	Swirskii sachets: 500 sachets Carrier: bran and factitious prey	

Amblyseius swirskii [Swirskii-Sprinkler-System]

Predatory mite for control of thrips, whitefly or spider mite.



CODE	SWIRSKII-SYSTEM	PRICE
XAAZ005204	500 ml tube: 25,000 mites Carrier: bran with factitious prey	
XAAZ300212	5 L bucket: 125,000 mites Carrier: bran with factitious prey	

Stratiolaelaps scimitus [Hypoaspis-System]

This predatory mite inhabits the top layer of the soil and feeds on the harmful sciarid fly larvae. Furthermore, Hypoaspis is also effective in controlling springtales, thrip pupae, millipedes, root aphids as well as other damaging soil organisms. It can be introduced in combination with insect parasitic nematodes without any problems.





CODE	HYPOASPIS-SYSTEM	PRICE
XAAZ000195	1 L tube: 10,000 mites Carrier: vermiculite, peat and factitious prey	
XAAZ000196	1 L tube: 25,000 mites Carrier: vermiculite, peat and factitious prey	
XAAZ000197	5 L bucket: 125,000 mites Carrier: vermiculite, peat and factitious prey	

BIOLOGICAL CONTROL



Steinernema kraussei [Kraussei-System]

Kraussei-System provides a rapid, biological cure for vine weevil larvae in containerized and outdoor crops. It is based on a unique strain of the insect parasitic nematode Steinernema kraussei, which is tolerant to low temperatures. The nematodes spread rapidly in the substrate and destroy the vine weevil larvae.





CODE	KRAUSSEI-SYSTEM	PRICE
XAAZ001020	50 million nematodes in gel formulation	
XAAZ001022	250 million nematodes in gel formulation	

Heterorhabditis bacteriophora [B-Green-System]

B-Green guarantees a fast biological control of beetle larvae (garden chafer and Hoplia). The product is based on a selected strain of the insect parasitic nematode Heterorhabditis bacteriophora, which actively searches and destroys white grubs in the soil. The nematodes do not infect larvae of the cock and summer chafer. B-Green can also be used to control black vine weevils, turning their larvae a reddish brown when infected.



CODE	CARPOCAPSAE-SYSTEM	PRICE
XAAZ004033	50 million nematodes in powder formulation	
XAAZ004032	500 million nematodes in powder formulation	

Diglyphus isaea [Diglyphus-System]

Parasitic wasp for leafminer control.





CODE	DIGLYPHUS-SYSTEM	PRICE
XAAZ000115	250 adults Carrier: filter paper	

Cryptolaemus montrouzieri [Cryptolaemus-System]

Cryptolaemus is a predatory ladybug beetle. Adults and larvae are voracious predators of every stage of mealybug.





CODE	CRYPTOLAEMUS-L-SYSTEM	PRICE
XAAZ301136	250 ml bottle: 250 adults Carrier: filter paper & shredded paper	

Steinernema feltiae [Steinernema-System]

These nematodes actively seek out fungus gnats larvae. They enter each larva through natural body openings and once inside, they bore through the intestinal wall of the larva. Bacteria living in symbiosis with the nematode are released and will eventually cause the death of the larva. The nematodes reproduce inside the larva and as it decomposes, a new generation of nematodes moves off in search of further prey.



CODE	STEINERNEMA-SYSTEM	PRICE
XAAZ004051	50 million nematodes in gel formulation	
XAAZ004049	250 million nematodes in gel formulation	

Steinernema carpocapsae

[Carpocapsae-System]

This nematode searches for pests found in the root zone of a plant. Once found, the nematodes penetrate the organisms through natural openings or directly through the skin. Bacteria that live in symbiosis with the nematodes are released. Carpocapsae-System is the biological solution for the control of harmful moths, Duponchelia, crane flies and several beetle larvae.



CODE	STEINERNEMA-SYSTEM	PRICE
XAAZ001024	50 million nematodes in gel formulation	
XAAZ001026	250 million nematodes in gel formulation	

Phasmarhabditis hermaphrodita [Phasmarhabditis-System]

Phasmarhabditis is a nematode specifcally used against slugs. After entering the body of the slug through natural openings, the nematodes release toxic bacteria. The nematodes multiply inside the slug and when it starts to decompose, a new generation of nematodes spreads and starts looking for new prey.



CODE	CODE PHASMARHABDITIS-SYSTEM	
XAAZ004040	12 million nematodes in gel formulation	
XAAZ004041	30 million nematodes in gel formulation	

Signal Clips

Clips for indicating hot spots of most common pests in the greenhouse.



CODE	DESCRIPTION	PRICE
XAAZ104550	Signal-clips blue: pack of 50	
XAAZ104555	Signal-clips yellow: pack of 50	
XAAZ104560	Signal-clips green: pack of 50	
XAAZ104565	Signal-clips orange: pack of 50	
XAAZ104570	Signal-clips red: pack of 50	
XAAZ104575	Signal-clips violet: pack of 50	

HAZARD WARNING SIGNS

Caution Spraying in **Progress**

- 3mm Rigid Plastic
- Size: 120 x 360mm

CODE

HAZAW08

HAZBW17



Hazardous Substances

- 3mm Rigid Plastic
- Size: 240 x 360mm

DESCRIPTION

AW.08 Caution Spraying in Progress

BW.17 Hazardous Substances



PRICE

100's of other signs available, including Self Adhesive or design your own...

Masks Must Be Worn

- 3mm Rigid Plastic
- Size: 240 x 360mm



Now Wash Your Hands

- 3mm Rigid Plastic
- Size: 240 x 360mm



CODE	DESCRIPTION	PRICE
HAZBM02	BM.02 Masks Must Be Worn	
HAZBM11	BM.11 Now Wash Your Hands	

Chemical Store Keep Out

- 3mm Rigid **Plastic**
- Size: 240 x 360mm



This Area Has Been Sprayed

Plastic



CODE	DESCRIPTION	PRICE
HAZBW18	BW.18 Chemical Store	
HAZCW05	CW.05 This Area Has Been Sprayed	
HAZCW05	CW.05 This Area Has Been Sprayed	

Danger Fork Lift Trucks

- 3mm Rigid Plastic
- Size: 360 x 480mm



CODE	DESCRIPTION	PRICE
HAZCW12	CW.12 Fork Lift Trucks	

- 3mm Rigid
- Size: 360 x 480mm

3mm Rigid Plastic

Private

Keep out

Private Keep Out

3mm Rigid Plastic

Size: 120 x 240mm

Size: 240 x 360mm



3mm Rigid Plastic

No Smoking

- Size: 120 x 240mm
- No smoking AP.01

5MPH Speed Limit First Aid

AG.02

- 3mm Rigid Plastic
- Size: 240 x 360mm



CODE	DESCRIPTION	PRICE
HAZBP13	BP.13 5MPH Speed Limit	
HAZBF05	BF.05 First Aid	
HAZAG02	AG.02 Private Keep Out	
HAZAP01	AP.01 No Smoking	

Caution Children **Playing**

Children

playing

Please drive slowly

- 3mm Rigid Plastic
- Size: 360 x 480mm

CC.01

- 3mm Rigid Plastic
- Size: 360 x 480mm

Caution Mud On Road

Mud

CC.06

on road

CODE DESCRIPTION **PRICE** HAZCC01 CC.01 Caution Children Playing HAZCC06 CC.06 Caution Mud On Road

Caution Deep Water

- 3mm Rigid Plastic
- Size: 360 x 480mm

Private Keep Out

- 3mm Rigid Plastic
- Size: 360 x 480mm



Keep CC.20

CODE	DESCRIPTION	PRICE
HAZCC17	CC.17 Caution Deep Water	
HAZCC20	CC.20 Private Keep Out	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk


SOLO MANUAL SPRAYERS

Solo Universal Sprayers 461 / 462

The optimum commercial choice at 5 and 7.5 litre capacity and 3 bar pressure. The large piston pump, the wide filling funnel where the spray tube can be clipped into place, the generously sized cleaning aperture and the two spray nozzles supplied as standard are just a few of the attributes of these attractive pressure sprayers.

All models are delivered as standard with two spray nozzles for different applications.

Max, spray pressure: 3 bar Spray tube length: 50 cm



Solo Backpack Sprayer 10L 473 D

Professional backpack sprayers, with diaphragm pump and 10 litre capacity. Equipped with a manually adjustable pressure regulator, a durable 50 cm long lance and a practical, robust valve handle.

The UV-resistant plastic container is ergonomically designed for maximum wearer comfort, and the robust metal pump handle can be stored vertically.

Max, spray pressure: 4 bar Spray tube length: 50 cm



Solo Backpack Sprayers 425 / 475 / 435

Professional backpack sprayers, with a capacity of 15 litre / 20 litre respectively. Both models are equipped with pressure control, a durable 50 cm long lance and a practical, robust valve handle.

The UV-resistant plastic container is ergonomically designed for maximum wearer comfort, and the robust metal pump handle can be stored vertically.

PISTON PUMP MODELS 425 / 435 Max, spray pressure.: 6 bar

Spray tube length: 50 cm

MODELS 475

Max, spray pressure.: 4 bar




CODE	CODE MODEL	
SOL425	Solo 15L Knapsack Piston Pump	
SOL435	Solo 20L Knapsack Piston Pump	
SOL475	Solo 15L Knapsack Diaphragm Pump	



Solo Sprayer Accessories

CODE	No.	DESCRIPTION	PRICE
SOL49004771	1	Dual Nozzle with Nozzle Set	
SOL49003561	2	Pressure Control Gauge 10 bar max	
SOL4900528	3	Tree Spraying Tube Brass 150cm	
SOL4900428	4	Spray Tube Brass 75cm	
SOL4900519	5	Spray Tube Brass 50cm	
SOL4900478	6	Telescopic Spray Tube Brass 57-100cm	
SOL4900457	7	Telescopic Spray Lance Carbon 60-120cm	
SOL4900445	7	Telescopic Spray Lance Carbon 120-230cm	
SOL4900449	8	Tree Spray Lance Carbon 120cm	
SOL49002061	9	Adjustable High Pressure Nozzle Brass	
SOL49005251	10	Adjustable High Pressure Nozzle Plastic	
SOL49005741	11	Complete Nozzle Set (9 nozzles)	
SOL4900439	12	Spray Tube 50cm	
SOL4900513	13	Extension Lance 50cm	
SOL49004421	14	Set of Seals [425/435]	
SOL49004431	15	Set of Seals [475/473D]	
SOL4900514	16	Spray Boom 60cm - 2 Nozzles	
SOL4900299	18	Alu. Spray Boom 120cm - 4 Nozzles	
SOL49001821	20	Double Nozzle Y-Shape	
SOL4900430	21	Drift Guard Oval with Flat Spray Nozzle	
SOL4900580	22	Drift Guard Round with Full Cone Nozzle	
SOL49003001	24	SS 4 Nozzle Spray Boom 100cm c/w 75cm Spray Tube	
SOL4900450	25	Spray Tube Extension 15cm, Flexible	
SOL49004401	27	Complete Shut Off Valve	

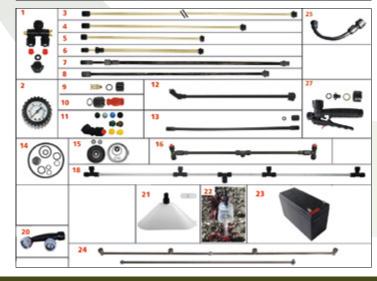

SOLO POWER SPRAYERS





The ideal pressure sprayer with up to 2.8 bar for use in greenhouses and

Maintenance-free 12 V rechargeable battery 5 Ah, fully charged in approx. Ergonomically shaped 20 Litre container with comfortable padded backThe SOLO 433 high pressure sprayer features a Honda GX25 4-stroke engine with plenty of power. The adjustable operating pressure of the push-pull piston pump reaches up to 30 bar, enabling this unit to deliver the finest spray - even high up - at a flow rate of up to

Equipped with a 50cm stainless steel spray wand and a pressure gauge on the sturdy handle, which allows the pressure to be adjusted for any application.

Supplied with a high quality twin nozzle, with stainless steel nozzle discs.

Specifications: 433H

Sound pressure level: 82 dB(A)



CODE	MODEL	PRICE
SOL433H	Solo 20L High Pressure (Petrol) Knapsack	

Dry weight: 9.8 kg

pack section Durable 500 mm lance

416

- 1500 mm long hose for tension-free arm movement
- Robust manual valve silicon-dampened pressure gauge

Solo Battery-operated Sprayer 20L


Impressive spraying performance with 12 V pump

enclosed spaces - including outdoors naturally

- Two-stage selection of application volume via rocker switch stage 1 = 1.4 bar, stage 2 = 2.8 bar
- New flat-jet nozzle to ISO standard
- Plug-in retainer for lance
- UV-stabilised plastic container with level markings
- Large filling and cleaning aperture
- Resistant seals for all plant protection agents
- Wide padded comfortable straps with strain relief and stabilising waist belt
- Robust container frame

Solo Portable Granular Spreader 421

The SOLO granulate spreader is designed to be used all year round.



- Gritting salt
- Oil absorbers
- Cleaning agents
- Pelletised lime
- Bird seed
- Stock feed
- Sand

A manual crank drives the steadily rotating spreader disc to guarantee precise distribution of the granulate onto the area to be treated.



The integral agitator ensures that the material in the tank is mixed thoroughly. Up to 9 kg of granulated material can be applied where specifically required, even on difficult terrain. The direction in which the material is spread can be adjusted just as easily as the delivery rate.

The spreader is carried in front of the body by means of an adjustable strap. The large filling aperture makes filling easy, whilst the large screw cap protects users from harmful dust.



CODE	MODEL	PRICE
SOL421	Solo 9L Portable Spreader	

Specifications: 416

Electric motor: 12 V / 5.2 Ah Container: 20 Litres

Spray Pressure: adjustable 1.4 / 2.8 bar





CODE	No.	MODEL	PRICE
SOL416	-	Solo 20L Battery-operated Knapsack	
SOL0084110	23	12V Rechargeable Battery	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

BARROW SPRAYERS & ACCESSORIES

Barrow Sprayer 50L

2-WHEEL BARROW SPRAYER

50L POLYETHYLENE TANK

complete with external suction filter, hose reel and 50m 1/2" high pressure hose with lever lance 60cm.

BATTERY VERSION

4 hours autonomy, charge time 9 hours.

MACHINE SIZE: 60x120x62 cm



CODE	DESCRIPTION	HP	LPM	BAR	PRICE	
LSTS050B	AM-12 V PRO	0.25	6.0	5-10		
LSTS050E	AR252-1ph 230V	1.5	25.0	25.0		
LSTS050P4	Four-stroke AR252- Honda GP160	4.8	25.0	30.0		

Sprayer Accessories, Lances & Booms

CODE		PRICE	
LSTSARKIT1927		R19/202/252 p Diaphragm Kit	
LSTSARKIT2408	Pi	AR202/252 ump Valve Kit	
LSTSARKIT2410		AR202/252 Maintenance Kit	
LSTSM2000007		7L Hand Wash Tank (can be fitted to all barrow/ trailed sprayers on this page)	
BK818000058	7	Ceccato Spray Pistol ½"(M)	
BK818805103		Lightweight Spray Gun ½"(M) with quick action trigger, pres- sure gauge and rotary knob. 30cm	
BK818805130		As above but 90cm	
LSTSM2000802	~	Lever Lance 60cm	
LSTSM2000902	7	Lever Lance 100cm	
PUD8282012	7	High Volume Wash Lance with Adj. Spray Pattern 1/2"(M)	
PUD26901165		Turbo Spray Gun (one-hand) Swivel Inlet: ½"(M)	
LSTSM2000602		Cone Nozzles with holes from 0.8 to 4.0mm dia.	
LSTSM2000702		Fan Nozzles with holes from 1.00 to 2.00mm dia.	
BS451725	*	Brass Hose Tail ½"(Fm) x ¾" hose	
SC050050F		Metal Swivel Coupling ½"(Fm) x ½" hose	

Barrow Sprayer 120L



CODE	DESCRIPTION	HP	LPM	BAR	PRICE
LSTS120E	AR252-1ph 230V	1.5	25.0	25.0	
LSTS120P4	Four-stroke AR252- Honda GP160	4.8	25.0	30.0	

Trailed Sprayer 200L

4-WHEEL TRAILED SPRAYER 200L POLYETHYLENE TANK POWDER COATED **TUBULAR STEEL FRAME 4 PNEUMATIC TYRES WITH BEARINGS**

complete with external suction filter, hose reel with 50m hose and lever lance 60cm. It comes with a tow bar for manual towing or towing by small tractors and lawnmowers.

MACHINE SIZE: 180x90x150 cm



Trailed Sprayer 400L

4-WHEEL TRAILED SPRAYER 400L POLYETHYLENE TANK POWDER COATED **TUBULAR STEEL FRAME 4 PNEUMATIC TYRES WITH BEARINGS**

complete with external suction filter, hose reel with 50m hose and lever lance 60cm. It comes with a tow bar for manual towing or towing by small tractors and lawnmowers.



CODE	DESCRIPTION	HP	LPM	BAR	PRICE
LSTS400E	AR252-1ph 230V	1.5	25.0	25.0	
LSTS400P4	Four-stroke AR252-Honda GP160	4.8	25.0	30.0	

CHEMICAL STORAGE SAFES

SafeStor™

The medium-duty
hazardous
substance
cabinet that
complies with
all COSHH
regulations

The SafeStorTM is purpose-built for the indoor safe storage of flammables and chemicals, including paint and other hazardous substances. Fully compliant with all legislation relating to the Control of Substances Hazardous to Health (COSHH), this robust range of cabinets features a liquid-tight sump to contain spillages, as well as galvanised shelves for maximum durability.





Features and specifications

- Medium-duty hazardous storage cupboard
- Reinforced doors with flush fitting handles and two-point locking
- Liquid-tight sump to contain spillages
- Designed for storing flammables or chemicals, as defined by COSHH guidelines
- Spill retaining galvanised shelves
- Powder coated paint finish fitted with hazardous warning signs
- Built to specification for 30 minute fire resistance











CODE	DESCRIPTION	WEIGHT	EXTERNAL SIZE	INTERNAL SIZE	SUMP CAP.	PRICE	STAND
ZCHEMHFC1	SafeStor HFC1 c/w 1 Shelf	20.5 kg	900 x 465 x 700 mm	890 x 395 x 640 mm	30 L		
ZCHEMHFC2	SafeStor HFC2 c/w 1 Shelf	12.5 kg	350 x 315 x 700 mm	335 x 245 x 640 mm	7 L		
ZCHEMHFC3	SafeStor HFC3 c/w 1 Shelf	25 kg	900 x 465 x 900 mm	890 x 395 x 840 mm	30 L		
ZCHEMHFC4	SafeStor HFC4 c/w 1 Shelf	31 kg	450 x 465 x 905 mm	440 x 395 x 840 mm	17 L		
ZCHEMHFC5	SafeStor HFC5 c/w 2 Shelves	41 kg	900 x 465 x 1200 mm	890 x 395 x 1140 mm	30 L		
ZCHEMHFC6	SafeStor HFC6 c/w 3 Shelves	65 kg	1200 x 465 x 1800 mm	1190 x 395 x 1740 mm	45 L		
ZCHEMHFC7	SafeStor HFC7 c/w 3 Shelves	55 kg	900 x 465 x 1800 mm	890 x 395 x 1740 mm	35 L		
ZCHEMHMC1	SafeStor Mobile Cupboard HMC1	25.5 kg	900 x 465 x 810 mm	890 x 395 x 640 mm	30 L		
ZCHEMHMC2	SafeStor Mobile Cupboard HMC2	33 kg	900 x 465 x 1010 mm	890 x 395 x 840 mm	30 L		

RESPIRATORY PROTECTION

Force™ 10 Full Face Half Mask (Medium)

The new Force™ 10 Typhoon™ is an extremely lightweight, easy to maintain full face mask with panoramic visor...

- Compatible with PressToCheck Filters (Not included)
- Typhoon exhalation valve for reduced breathing resistance (Patent pend-

Engineered for easy maintenance

Class 1 optical impact visor conforming to EN166.B

One of the lightest full face masks on the market





CODE	DESCRIPTION	PRICE
JSPFOR10M	Force™ 10 Full Face Half Mask (Medium)	
JSPFOR8ABEK1P3	Force8™ ABEK1P3 Classic Filters (pair)	
JSPFOR8P2CABEK1P3	Force8™ ABEK1P3 PressToCheck (pair)	

Force8[™] Half-Mask (Medium)

The Force8[™] twin cartridge half mask with Typhoon[™] valve offers superior low breathing resistance and a 4-point suspension harness with guick release buckles. The mask is made with a durable thermoplastic rubber offering a superior fit to most face shapes. The mask accepts the full range of low profile Force8™ filters giving it the flexibility to be used for many applications, providing filtering protection against particulates, many gases and vapours.

- Passes dolomite
- Protection against construction dust
- Improved hygiene
- Inhalation valve for easy maintenance
- Low profile covers protect filters
- Conforms to EN143





CODE	DESCRIPTION	PRICE
JSPFOR8M	Force8™ Half-Mask (Med.) without canisters	
JSPFOR8ABEK1P3	Force8™ ABEK1P3 Classic Filters (pair)	
JSPFOR8P2CABEK1P3	Force8™ ABEK1P3 PressToCheck (pair)	

Jetstream® Powered Air Respirator

The Jetstream[®] Switch & Go Gas/Vapour GV-X Version (with Nylon Hood).

Jetstream® Switch & Go pack GV-X contains:

- A2PSL Filter
- Hose
- Charger
- Carry Case
- White Nylon Headtop
- Flow Meter & UK Plug

Filter Performance: Offers an assigned protection factor (APF) of 20 x Workplace Exposure Limit (WEL) for organic vapours and gases and for very fine dusts, fibres, fumes and aqueous mists.

A stream of cooling filtered clean air

- High capacity pleated filter cartridges
- Comfortable for wearing over long periods



CODE	DESCRIPTION	PRICE
JSPJSGVX	Jetstream Gas/Vapour GV-X Switch & Go	
JSPJSA2PSL	A2PSL Replacement Filter	

Disposable Nuisance Dust Masks

Suitable for nuisance levels of nontoxic dust below the WEL only. This mask is ideal for applications where items in production need protecting from the wearer's breath, i.e. printed circuit board protection. Does not offer respiratory protection.

Box of 50 masks.



Breathing Mask FFP2 V - Box of 10

It is used to protect the user against oil and water based mist, solid particles and non-volatile liquid particles.

Conforms to EN149:2001+A1:2009 Standard that is about the filtered face mask against dust.



CODE	DESCRIPTION	PRICE
SFY25	Breathing Mask FFP2 Valved (Box of 10)	

Classic™

WORKWEAR

Dupont Tyvek® Classic Plus Coveralls

Whether it's for painting or maintenance work, for finishing processes or anywhere there is a slight risk of liquid splashes, Tyvek Classic Plus coveralls offer the high protection thanks to their taped seams and their high barrier against particles superior to 1 micron.

Chemical Protective Clothing -Category III, Type 4/5/6

- Tyvek zip fastening and self adhesive zip flap for increased protection

	vides a good Shape of hoo wearing a ful Stitched and Stretch rubbo at the end of	d especially designed for I face respirator overtaped seams er thumbloop attached the sleeves - use of thumb commended when		
	CODE	DESCRIPTION	SIZE	PRICE
	SFYTCA111W	Dupont Tyvek Classic Plus Coverall	M-2XL	
-				

Loose Sleeves

PROPERTIES:

- PVC/polyester 320g
- One size
- Olive Green



1	CODE	DESCRIPTION	SIZE	PRICE
	CLOE030300	Loose Sleeves Olive Green	One Size	

PVC Apron

Heavy duty PVC with three cotton ties. Dimensions 48" x 36"

NB, colour might differ.



CODE	DESCRIPTION	PRICE
SFY10	PVC Apron	

Working Xtreme

The Working Xtreme range is professional workwear that meets every need for waterproof clothing. The 100% wind- and waterproof fabric, combined with maximum breathability, ensures optimum comfort and mobility whatever the weather.

Technical description:

- Main fabric: 100% Polyester 75D twill 190 g/m²
- Water column: H²O: > 8000 mm Trousers, > 15000
- Breathability: 5000 g/m²/24h Trousers, > 10000 Jacket

186101 Stretch 3 Layer Jacket

- 3 layer jacket with outer fabric, membrane and lining laminated in one piece of fabric to make it lighter
- 2 way YKK zip
- Chest pocket with flap
- Hidden multifunction pocket
- Double storm flap with velcro
- Coated zip
- Detachable hood with string and velcro
- 2 pockets with coated zips
- Adjustable lower hem
- Segmented reflective tape
- Size L back length 81 cm

Sizes: XS - 5XL



182401 Stretch Combi

Trousers

- Taped seams
- Detachable braces
- Extended back
- Adjustable waist with hook & loop
- Vertical pockets with coated zip
- Left side pocket with zip & flap
- Tool pocket in durable fabric
- Cordura reinforcement on knee pocket
- Legs with zipper





Dry Zone & Dry Zone EN471 series ensure optimal mobility. The flexible and durable PU/Polyester material combines high tear strength with a natural elasticity and comfort.

Technical description:

- 190 g PU/Polyester
- Water column: H²O: > 5000 mm

029900 Dry Zone Bib & Brace

- Press buttons in leg
- Adjustable suspenders with Fix-lock
- Reinforced welding in crotch

Sizes: XS - 5XL



CODE	DESCRIPTION	PRIC	CE
CLOEDOB	Dry Zone Bib & Brace 190g - Green		

026300R Dry Zone Hi-Viz Jacket

- Reflex on shoulder and arms
- Zipper and storm flap with press buttons
- 2 pockets with flaps
- Hidden/adjustable hood
- · Adjustable in lower hem
- · Adjustable neck with velcro
- Size L back length: 76 cm

Sizes: XS - 5XL

022400R Hi-Viz Trousers

- · Vertical reflective stripe
- Press buttons in leg
- · Reinforcement in crotch

Sizes: XS - 5XL



	Control of the Contro	
CODE	DESCRIPTION	PRICE
CLOE026300R	Dry Zone EN471 Jacket	
CLOE022400R	Dry Zone EN471 Waist Trousers	



Dry Zone D-Lux fabric takes the Dry Zone fabric as a basis and developed a jacket and trousers with a number of extra details. We have added reflectors to improve safety in the dark months of the year and a longer length jacket, a new sleeve fastening and more pockets in the trousers.

Technical description:

- 190 g PU/Polyester
- Water column: H²O: > 5000 mm

026301 Dry Zone D-Lux Jacket

- Reflective stripe on chest and back
- Reflective logo on right sleeve, left pocket flap and on the back
- 2-way zipper with storm flap
- 2 pockets with flap
- Hidden/adjustable hood
- Elasticated sleeve and velcro adjustment
- Size L back length: 89 cm

Sizes: XS - 5XL



022401 Dry Zone D-Lux Waist Trousers

- Elasticated waist
- 2 pocket openings in side seam
- Double tool pocket on leg
- Cargo pocket
- Zipper with inside wind catch on leg
- · Reflective stripes on leg

Sizes: XS -5XL



CODE	DESCRIPTION	PRICE
CLOEDZOJ	Dry Zone D-Lux Jacket 190g - Green	
CLOEDZOT	Dry Zone D-Lux Waist Trouser 190g - Green	



Xtreme

Elka Xtreme offers outstanding comfort, quality and durability. The soft, flexible PVC quality, which is of course resistant to cold and oil, therefore satisfies all the requirements for hard-wearing horticultural wear.

Technical description:

- 600 g PVC/Polyester
- Water column: H²O: > 13000 mm

179801 Xtreme Jacket

- Press buttons
- Adjustable hood

Sizes: XS - 5XL



177301 Xtreme Bib & Brace

- Adjustable suspenders with Fix-lock
- Inside pockets

Sizes: XS - 5XL

CODE	DESCRIPTION	PRICE
CLOEOJ	Extreme Jacket 600g - Green	
CLOEOB	Exteme Bib & Brace 600g - Green	

4XL & 5XL garments all + 25%

ELKA

Waders

Chest waders have been developed to satisfy the demands made by angling and deep-sea fishing. Our European fabrication in soft, hardwearing 600 g PVC/Polyester guarantees outstanding comfort and durability.

Technical description:

- 600 g PVC/Polyester
- Water column: H²O: > 13000 mm

170000 Elka Chest Waders

- Double welded in all stitchings
- Dunlop boot
- Inside pocket
- Fix-lock braces
- Repair kit

Sizes 5-15





CODE	DESCRIPTION	SIZE	PRICE
CLOEOW*		5 - 12	
CLOEOW130	Chest Waders Olive Green	13	
CLOEOW**		14 - 15	

Size Chart

Jackets & Smocks							Adult	~ Unisex	
Size	XS	S	М	L	XL	2XL	3XL	4XL	5XL
Chest cm	84 - 88	92 - 96	100 - 104	108 - 112	116 - 120	124 - 128	132 - 136	140 - 144	148 - 152

Trousers &	Bib and Br	ace						Adult 4	~ Unisex
Size	XS	S	М	L	XL	2XL	3XL	4XL	5XL
Waist cm	70 - 74	78 - 82	86 - 90	94 - 98	102 - 106	110 - 114	120 - 124	128 - 132	136 - 140

SAFETY EQUIPMENT

Clear Goggles

Ear Defenders

A popular choice of ear defender, effective, economical protection.



CODE	DESCRIPTION	PRICE
SFY12	Clear Safety Goggles	
JSPED25	Ear Defenders SNR 25 (EN352-1)	

Browguard with Clear Visor

EN 1661B / 3B

PC visor with PP browguard manufactured from impact resistant polypropylene. The wheel ratchet adjustment system is designed for easy use.

Replacement polycarbonate visor available.

Visor size: 20 x 40cm



SFY15 Browguard with Clear Visor	

Emergency Sterile Eye Wash Station

Ideal for use in office or warehouse. Wall mountable with mirror. 2 x 500ml bottles of sterile emergency eyewash. The eyewash is fitted with an integral eyebath and made from a sterile sodium chloride solution best stored between 2-40°C.



CODE	DESCRIPTION	PRICE
SUDT81292	Emergency Eye Wash Station	£25.50

Blue Nitrile Disposable Gloves

Powder free Nitrile disposable glove.

Sizes: S-XL



CODE	DESCRIPTION	PRICE
CLO38x	Blue Nitrile Disposable Glove [Box of 100]	

GLOVES

PVC Gauntlet 45cm

Preformed shape and support by cotton liner enables easy donning and removal. Seamless liner provides exceptional comfort therefore reduces hand fatigue. Offers good cut and abrasion resistance and increased resistance to acids, greases and oils.



Heavy Duty Latex Rubber Glove

A heavy duty glove that can withstand repeated punishment, such as knocks and scuffs. Cotton flock lining removes irritation and absorbs perspiration.

One Size



CODE	DESCRIPTION	PRICE
CLO48	Red PVC Gauntlet 45cm	
CLO4510	Heavy Duty Rubber Glove	

Blue Nitrile Flocklined Glove

Ergonomically designed to combat hand fatigue, offering increased user comfort. Textured surface ensures good grip in wet and dry conditions. Flock lining keeps hands cool and comfortable, removes irritation and absorbs perspiration. Contains agents to protect hand from infection.

Sizes: S-XL



Black Gauntlet 45cm

Natural rubber, medium weight. CE Marked.

Sizes: S-XL



CODE	DESCRIPTION	PRICE
CLO42x	Blue Household Glove	
SFY04x	Black Gauntlet 45cm	

Vinyl Disposable Gloves

Powdered clear vinyl disposable glove, durable and dextrous, resists acids and alcohols. Feels like a second skin for the most tactile applications. Low vegetable starch powdering on interior ensures easy donning and removal whilst also absorbing perspiration. Can be worn on either hand.

Sizes: S-XL



Latex Powder Free Disposable Gloves

Natural rubber latex powder free glove, reduces product contamination, eases donning and removal. Tight fitting latex gives a second skin feeling which offers maximum dexterity, sensitivity and comfort for the user. Can be worn on either hand.



CODE	DESCRIPTION	PRICE
CLO50x	Vinyl Powdered Disposable Gloves [Box of 100]	
CLO52x	Latex Powder Free Disposable Gloves [Box of 100]	

GLOVES

Vis-Tex5 Cut Resistant Glove

Cut resistant level 5 glove with PU dipping for high abrasion resistance, the HPPE liner also achieves a level 1 for contact heat. Flexible hi-vis lining for optimum protection and comfort.



CODE	DESCRIPTION	SIZES	PRICE
CLO625x	Vis-Tex5 Cut Resistant Glove	M-L (9-10)	

Standard Rigger

Denim backed, gunn cut with a wing thumb. Safety cuff and internal elastic tensioner on back of wrist.

Classic Chrome Rigger Glove

Constructed using premium split leather with additional knuckle padding for add protection. Yellow/Red.





CODE	DESCRIPTION	PRI	CE
CLO43	Standard Rigger - Large		
CLO219XL	Classic Chrome Rigger Glove - Yellow/Red - XL		

PVC Coated Knit Wrist Glove

PVC single dipped fully coated glove with white knitted cuff. Tough and flexible PVC coating which offers great abrasion resistance. Increased resistance to acids, oils, alcohols and greases.

Sizes: Medium or Large



Gardening Gloves

- · Stylish and elegant
- Patented MICROFINISH technology
- Machine washable in cold water
- Breathable
- · Waterproof palm area
- Odourless
- · UV protection
- Snug fit





Soft n' Care Flora Garden Glove

For sensitive touch

- 13 Gauge seamless lining
- · Latex Polyester

Sizes: Small or Medium





Soft n' Tough Original Glove

Best suited to heavy gardening work as well as DIY

- · 10 Gauge seamless knit lining
- · Latex Poly/Cotton

Sizes: Small, Medium or Large



CODE	DESCRIPTION	COLOUR	PRICE
CLOSCFB	Soft n Care Flora Gloves	Blue	
CLOSCFP	Soft n Care Flora Gloves	Cool & Soft Pink	
CLOSTOG	Soft n Tough Original Gloves	Ever Green	

PU Coated Glove

- PU coated polyurethane glove
- Colour coded cuff to indicate size
- Breathable for all day comfort
- UNSPSC: 46181504 Protective Gloves
- EN388 Tested Glove
- Sizes: 8, 9, 10 & 11



CODE	DESCRIPTION	PRICE	CODE	DESCRIPTION	SIZES	PRICE
CLO04x	PVC Coated Knit Wrist Gloves		CLO46x	PU Coated Gloves	8-11	

BUCKLER BOOTS

43U@KU=RBOOTS

Goodyear Welted Steel Toe & Midsole SB P HRO and S3 BVIZ2 OR

B301SM

- Lace Boot
- Chocolate Oil Leather
- Anti Scuff Toe Protector
- K2 Sole
- SB/P/HRO/SRA

Full Sizes: 6/40 - 13/47



CODE	DESCRIPTION	COLOUR	PRICE
CLB301	B301SM	Chocolate Oil	
E-	E	31150SM Bu	ckflex™
		Vall - a all B	Boot ant Sole
		Full Sizes: 4/3	8 - 13/47

CODE	DESCRIPTION	COLOUR	PRICE
CLB1150	B1150SM	Chocolate Oil	

B1151SM Buckflex™

Dealer boot

Autumn Oak Leather

K2 Heat & Oil Resistant Sole

Full Sizes: 6/40 - 13/47



CODE	DESCRIPTION	COLOUR	PRICE
CLB1151	B1151SM	Autumn Oak Leather	



CODE	DESCRIPTION	COLOUR	PRICE
CLB750	B750SMWP	Dark Brown	





www.lssystems.co.uk

- Lace Boot
- Waterproof
- Black oiled nubuck leather with water resistant cordura
- Anti-scuff toe
- Foorbedz comfort insole
- SB/P/HRO/SRC

Full Sizes: 6/40 - 13/47

CODE	DESCRIPTION	COLOUR	PRICE
CLBVIZ2YL	D 1 15	Yellow	
CLBVIZ2OR	Buckz Viz	Orange	



CODE	DESCRIPTION	COLOUR	PRICE
CLBSH010	BSH010	Crazy Horse Brown	

Buckshot BSH008 CR

High leg zipper boot

Dark Brown Crazy Horse Leather

Waterproof

Composite Toe Cap

Supertough anti-scuff toe

Non-metallic Midsole Comfort insole

S3 HRO SRC WRU

Full Sizes: 6/40 -13/47



CODE	DESCRIPTION	COLOUR	PRICE
CLBSH008CR	BSH008WPNM	Dark Brown	

Nubuckz NKZ102

- Lace boot
- Nubuck leather
- Supertough anti-scuff toe
- Comfort insoles
- Non-metallic
- S3 HRO SRC

Full Sizes: 6/40 - 13/47



CODE	DESCRIPTION	COLOUR	PRICE
CLBNKZ102BK	NKZ102	Black	

Goodyear Welted Non-Safety

B1100 Buckflex™

- Sundance Mid Tan Oil Leather
- **Elastic Sided Dealer Boot**
- Buckflex built-in shoe horn
- Cambrelle Lined
- K2 Sole

Full Sizes: 6/40 - 12/46



CODE	DESCRIPTION	COLOUR	PRICE
CLB1100	B1100	Sundance Mid Tan	

B1300 Buckflex™

- Full cowhide "No Sweat" lining
- Dark Brown Crazy Horse Leather
- K3 Rubber Sole

Full Sizes: 6/40 - 13/47



CODE	DESCRIPTION	COLOUR	PRICE
CLB1300	B1300	Dark Brown	

B2800 Buckflex™

- Full cowhide "No Sweat" lining
- Dark Brown Crazy Horse Leather
- K3 Rubber Sole

Full Sizes: 6/40 - 13/47



CODE	DESCRIPTION	COLOUR	PRICE
CLB2800	B2800	Dark Brown	

Nubuckz NKZ101

- Dealer boot
- Nubuck leather
- Supertough anti-scuff toe
- Comfort insoles
- Non-metallic
- S3 HRO SRC

Full Sizes: 6/40 - 13/47



CODE	DESCRIPTION	COLOUR	PRICE
CLBNKZ101BR	NI/7101	Brown	
CLBNKZ101BK	NKZ101	Black	

Hybridz Lace Dealer Boot

- Steel Toecap
- Steel Midsole
- Antistatic
- Supertough anti-scuff toe
- Water Resistant Uppers
- Comfort insole
- Slip Resistance Max Test
- Heat (300C/60 secs) and Oil **Resistant Outsole**
- Dark Brown Crazy Horse or Honey Nubuck Leather

Full Sizes: 6/40 - 13/47



CODE	DESCRIPTION	COLOUR	PRICE
CLBHYB2BR	11.1.21	Crazy Horse Brown	
CLBHYB2HY	Hybridz	Honey Nubuck	

Kez

- Copper Crazy Horse Leather
- Cambrelle Lined
- K3 Rubber Sole

Full Sizes: 6/40 - 13/47



CODE	DESCRIPTION	COLOUR	PRICE
CLBKEZBL	Kez	Black	

Cordura Boot Socks Laces

55"/140cm long



Arch support

- Cordura comfort
- Leg support
- Shock absorption
- Black

Sizes: S, M & L



CODE	DESCRIPTION	COLOUR	PRICE
CLO21K	Boot Laces	Black	
CLO21B	7/41 to 12/46	Brown	
CLBSOKZCXX	Boot Socks	Black	

WELLINGTONS

BBZ 5020 Knee Boot

- · Neoprene waterproofing
- Chemical Resistant
- Abrasion Resistant
- · Oil Resistant
- · Vulcanised sole unit
- K3 Sole

Full Sizes: 5/39 - 13/47



CODE	DESCRIPTION	COLOUR	PRICE
CLBBZ5020	BBZ 5020	Olive Green	

Green Wellington

- Waterproof
- Green
- PVC

Full Sizes: 6-12



CODE	DESCRIPTION	COLOUR	PRICE
CLPFW90	Wellington	Green	

Full Safety Wellington

Safety Wellingtons are manufactured from PVC/Nitrile to give a seamless watertight construction. 200 joule steel toe cap, slip resistant and anti-static are just some of the key features. Washable nylon lining and kick off spurs make these wellingtons safe for use in a wide range of environments.

Full Sizes: 3-13



CODE	DESCRIPTION	COLOUR	PRICE
CLPFW95xB	Cafata Mallin at an	Black	
CLPFW95xG	Safety Wellington	Green	

Skellerup Non-Safety Red Band Knee Wellington

- Knee length farm boot
- Heavy duty cleated sole
- Cotton lined
- Built-in rubber foam cushioned insole

Full Sizes: 4-14



CODE	DESCRIPTION	COLOUR	PRICE
CLPFW95xB	Quatro Red Band	Black with Red Trim	

BBZ 6000 S5 HRO CI SRC Safety Buckbootz

- Steel Toecap & Midsole
- Neoprene waterproofing
- · Hi-Viz Lining rolls down for extra safety
- Heat & Oil Resistant
- Aerospencer honeycomb breathable lining
- K3 Sole
- · Approved for building sites

Full Sizes: 6/40 - 12/46 Also available in Green or Blue



CODE	DESCRIPTION	COLOUR	PRICE
CLBBZ6000OB		Orange with Blue Trim	
CLBBZ6000BK	DD7 (000	Black	
CLBBZ6000BL	BBZ 6000	Blue with Orange Trim	
CLBBZ6000GR		Green	

Quatro Knee Insulated Super Safety S5

Cutting edge, fully waterproof safety boot. Lined with 4mm of neoprene fleece this boot has been comfort tested down to -50C providing you with the highest level of comfort and protection even in the harshest conditions.

- S5 safety rating EN ISO 20345 S5
- SureGrip 360 nitrile outsole
- ComfortForm steel toe cap & steel penetration midsole

Full Sizes: 4-14



CODE	DESCRIPTION	COLOUR	PRICE
CLSQS5BR	Quatro Safety	Black with Red Trim	

LANDSCAPING AND GARDEN PRODUCTS

38mm Spiral Tree Guards

An easy to fit, cost effective method of protecting young trees against small animals and strimmers. Spiral tree guards do not shrink and will stand up to the most adverse weather conditions.



CODE	DESCRIPTION	COLOUR	PACK	PRICE
SUN270CR	Spiral Tree Guard 45cm x 38mm	Clear	250	
SUN270BN	Spiral Tree Guard 45cm x 38mm	Brown	250	
SUN271CR	Spiral Tree Guard 60cm x 38mm	Clear	250	
SUN271BN	Spiral Tree Guard 60cm x 38mm	Brown	250	

Soft Buckle Tree Ties

Made from soft black PVC strapping which is capable of stretching with growth, is also easily adjusted and comes complete with hoop collar spacer to prevent chaffing between tree and stake.



CODE	DESCRIPTION	PACK	PRICE
TTSB15B	Buckle Tree Tie 40cm x 25mm	100	
TTSB18B	Buckle Tree Tie 45cm x 25mm	100	
TTSB24B	Buckle Tree Tie 60cm x 25mm	100	

Rubber Tree Cushions

These soft rubber tree cushions offer a very soft and bouncy support between the tree and stake allowing maximum movement to the benefit of the young developing tree.

These cushions come with two preformed slots allowing a good strong assembly to be made using a long life rubber strap in either 25 or 38mm size.



CODE	DESCRIPTION	PACK	PRICE
SUNC295	Tree Cushion 25mm	100	
SUNC296	Tree Cushion 38mm	100	

The Shire Wheelbarrow

Heavy-duty barrow in an easy assembly format.

- 90L polypropylene barrow
- Heavy duty powder coated tubular steel frame
- Pneumatic tyre



CODE	DESCRIPTION	COLOUR	PRICE
WBSHGP	Shire Barrow 90L Polypropylene	Green	

The Easiload Galvanised Contractor Wheelbarrow

Heavy-duty barrow in an easy assembly format.

- 90L press pan
- Tubular steel frame
- Pneumatic tyre
- Galvanised



CODE	DESCRIPTION	COLOUR	PRICE
WBEGVP	Easiload 90L Press Pan	Galvanised	

ICL SPORTS & LANDSCAPE

Sportsmaster[™]

A high quality mini-granular fertilizer range for sports and amenity turf. Sportsmaster is the industry standard fertilizer for turf mown above 6mm, the various analyses are designed to maintain turf performance throughout the year.

Spring & Summer

Sportsmaster Spring & Summer is an all-rounder that breaks down quickly to give rapid uptake of nutrients

Renovator Pro

14-0-5+Fe+MCPA+Mecoprop-P

Sportsmaster Renovator Pro is a weed, feed and mosskiller that maintains growth and contains a selective herbicide for weed control plus iron for moss control.

Cleanrun Pro

14-0-5+MCPA+Mecoprop-P

Weed and feed single application in spring or summer periods when broad-leaved weeds are present.

Autumn

4-12-12

Sportsmaster Autumn is ideally used to strengthen turf in autumn or when turf needs pre-stress conditioning.

CODE	DESCRIPTION	SIZE	PRICE
FERISSS	Sportsmaster Spring & Summer	25kg	
FERISRP	Sportsmaster Renovator Pro	25kg	
FERISCP	Sportsmaster Cleanrun Pro	25kg	
FERISAW	Sportsmaster Autumn	25kg	

Lawn Sand

Kills moss and can be used on all grasses.

Analysis: 2-0-0+2Fe



CODE	DESCRIPTION	SIZE	PRICE
FERELS25	Lawn Sand No.2	25 Kg	

LAWN SEED

sales@lssystems.co.uk

Johnsons Economy with rye

- Hard-wearing and ideally suited to play areas and paths
- For semi and relatively dense shaded areas under trees and next to high walls and hedges
- A mixture of perennial ryegrass and strong creeping red fescue
- Ideal mixture for overseeding in Spring & Autumn



CODE	DESCRIPTION	SIZE	PRICE
JLSJECON10	Economy with ryegrass	10 Kg	

Pro Master PM52 Greenfine

without ryegrass

An economical, fine textured mixture, reduces maintenance, suitable for landscaping and lawns. Contains only STRI UK listed cultivars.

30% Wagner chewing fescue 70% Maxima strong creeping red fescue



CODE	DESCRIPTION	SIZE	PRICE
JLSPM52	PM 52 Greenfine	10 Kg	

Pro Master PM51 Grass Seed

A hard-wearing mixture that establishes rapidly. Ideal for general purpose landscaping and lawns.

20% Platinum perennial ryegrass 20% Esquire perennial ryegrass 60% Maxima strong creeping red fescue



CODE	DESCRIPTION	SIZE	PRICE
JLSJPM51	PRO 51	20 Kg	

Pro Master PM80 Stadium Mix

Ideal for heavily shaded amenity areas including golf tees and lawns.

40% Verdi perennial ryegrass 30% Ponderosa perennial ryegrass 30% Platinum perennial ryegrass



CODE	DESCRIPTION	SIZE	PRICE
JLSPM80	PRO 80	20 Kg	

LANDSCAPING & GARDEN PRODUCTS

Landscape Fabric

Made from a black spunbonded polypropylene, with high levels of UV stabiliser, it acts as a barrier between soil and top mulch, preventing soil migration and providing a clean, attractive surface. Used in planting schemes and enables easy planting, by pre-cutting crossholes in the fabric, in golf bunkers and under play areas, paths and patios. Helps suppress weed growth.


- Landscaping
- **Weed control**
- **Planting out**
- **Beds**
- **Tubs**
- **Hanging baskets**



CODE	WIDTH	LENGTH	PRICE
TILM10100	1.00m	100m	
TILM15100	1.50m	100m	
TILM20100	2.00m	100m	
TILM30100	3.00m	100m	

Pot Topper

Sinclair pot topper is a superior alternative to bark and can be used as a pot topper or for mulching beds and borders. The pot topper which is produced in the UK using sustainable 100% FSC certified virgin wood chips, can be applied directly to pots and borders and binds together using its natural adhesive properties, ensuring the material does not fall off if the pot is tipped over and it can also be used on sloping borders as the material will remain in situ.

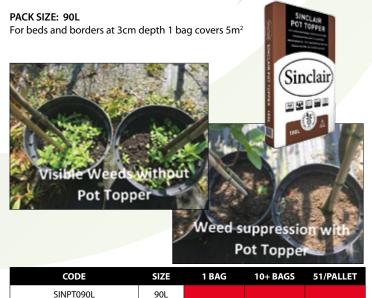

Permatex Blue Grid Premium Groundcover 100gsm

Features:

- **Exceptional** weed suppression without spraying
- **Excellent water permeability** maintains moisture levels without puddling
- Easy installation and maintenance
- Puncture and tear resistant can handle machine and pedestrian
- Perfect for use below ground, especially under gravel driveways and paths



CODE	WIDTH	LENGTH	PRICE
GCP100100	1.00m	100m	
GCP200100	2.00m	100m	
GCP330100F	3.30m	100m	
GCP420100F	4.20m	100m	
GCP515100F	5.15m	100m	

5 Litre Plastic Watering Can

For use in the garden, greenhouse and window boxes etc.



CODE	DESCRIPTION	COLOUR	PRICE
SUDT84294	Plastic Watering Can 5L	Green	

7 Litre 'Cradley Cascader' Watering Can

Injection moulded plastic can. The back handle and cross stem provide two gripping points for balanced pouring.

7 Litre can supplied with an oval brass faced plastic rose.



CODE	DESCRIPTION	COLOUR	PRICE
WCH169GRN	Cradley Cascader Watering Can 7L	Green	


Plastic Buckets c/w Pourer



CODE	DESCRIPTION	PRICE
SUHT102	Yellow Plastic Bucket 2 gallon c/w Pourer	

BULLDOG TOOLS - PREMIER GARDEN RANGE


British made garden tools





Garden Spade

This traditional style spade is solid forged from one piece to give strength and durability in the garden.



Border Spade

Handle: 28" Ash YD Head Size: 230x140mm

Garden Fork

Handle: 28" Ash YD Head Size: 290x190mm

Border Fork

Handle: 28" Ash YD Head Size: 230x140mm



CODE


SUBPRGS

SUBPRBS



DESCRIPTION	PRICE	





RIPTION	PRICE	C
en Spade		SUE
er Spade		SUE

Lawn Edging Knife

Handle: Ash 32" Barrel T Head Size: 177x205mm

Garden Rake

Handle: 60" Ash

12 Tooth

Head Size: 300mm

Irish Round Mouth Shovel

Handle: 48" Long Straight Ash Head Size: (Dia) 330x250mm


CODE	DESCRIPTION	
SUBPRGF	Garden Fork	
SUBPRBF	Border Fork	

Dutch Hoe

Handle: 54" Plain Ash Head Size: 126mm

Draw Hoe

Handle: 54" Ash Head Size: 180mm



CODE	DESCRIPTION	PRICE
SUBPRLEK	Lawn Edging Knife	
SUBPRIRMS	Irish Round Mouth Shovel	

Garde

Nail Tooth Rake

Handle: 60" Ash Head Size: 280mm 12 Tooth



Springbok Rake

Handle: 48" Ash Head Size: 482mm 20 Tines

Plastic Leaf Rake

Handle: 48" Ash Head Size: 535x610mm Cranked tooth design





CODE	DESCRIPTION	PRICE
SUBPRGR12	Garden Rake 12 Tooth	
SUBPRNTR	Nail Tooth Rake 12 Rivetted Teeth	



CODE	DESCRIPTION	PRICE
SUBPRSP	Springbok Rake	
SUBPRPLR	Plastic Leaf Rake	

BULLDOG HAND TOOLS



CODE	DESCRIPTION	PRICE
SUBPRWF	Weed Fork	
SUBPRPT	Planting Trowel	

Daisy Grubber

Handle: 6" Hardwood Head Size: 150x39mm



CODE	DESCRIPTION	PRICE
SUBPRDG	Daisy Grubber	
SUBPRTT	Transplant Trowel	

Bulb Planter

Handle: 28" Ash T Head Size: (Dia) 85mm Cutting Depth: 126mm

Dibber

Handle: Ash T Soil Penetration Depth: 255mm

CODE	DESCRIPTION	PRICE
SUBPRBP	Bulb Planter	
SUBPRD	Dibber	

Platform Brooms Assembled

A selection of medium soft and stiff bristle brooms to suit most applications. Supplied assembled complete with handles and stay.



Wood Hay Rake

With an excellent reach and collection potential large areas of hay, straw and grass cuttings can be raked up quickly and easily. Widely used by contractors for levelling surfaces and smoothing over sand bunkers on golf courses. Made entirely from hardwood it is light and easy to handle.

Handle: 70" Hardwood Plain 16 Tooth

> CODE **SUBPRWHR** SUBPRAHR

Alloy Hay Rake

Similar to the Wood Hay Rake except the working end of the tool is all metal for strength, ideal for tougher use. Perfect for hay raking, shaping and levelling newly dug beds, collecting grass clippings and raking up leaves in large quantities. The rounded metal teeth skim along the ground without snagging or digging in.

Handle: 72" Hardwood Plain 18 Tooth



ALLIAN,	TI
DESCRIPTION	PRICE
Wood Hay Rake	

TubTrug® Flexible Rubber Buckets 26L

Common uses: Horse Feed/Water Bucket, Medium Plant Pot, Toy Storage, General Household Storage, Laundry Basket, Shopping Bag & endless other applications. Size: H30cm D39cm

Alloy Hay Rake



CODE	COLOUR	SIZE	PRICE
TUB26GR	Green	26 L	
TUB26OR	Orange	26 L	
TUB26YE	Yellow	26 L	

TubTrug® Flexible Rubber Buckets 38L

Uses as above with that little bit of extra space.



CODE	COLOUR	SIZE	PRICE
TUB38GR	Green	38 L	
TUB38OR	Orange	38 L	
TUB38YE	Yellow	38 L	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

SPEAR & JACKSON ELEMENTS

Elements Digging Spade

- Heat treated and hardened carbon steel
- Hammer finish, powder coated head
- Weatherproofed & clear laquered ash wood shaft
- Ergonomic forward tilted handle
- Polypropylene D shaped soft feel handle
- Treaded head for comfortable



CODE	DESCRIPTION	PRICE
SUSJ4190NB	Elements Digging Spade	

Elements Border Spade

Features as above, but smaller size for digging in borders and between



CODE	DESCRIPTION	PRICE
SUSJ4194NB	Elements Border Spade	



Elements Border Fork


Features as digging spade, but smaller size for turning over and breaking up soil in borders and between plants



CODE	DESCRIPTION	PRICE
SUSJ4994NB	Elements Border Fork	



Elements Flexo Rake









Elements Dutch Hoe



Elements Onion Hoe



	*	
CODE	DESCRIPTION	PRICE
SUSJ4135NB	Elements Dutch Hoe	

CODE	DESCRIPTION	PRICE
SUSJ4160NB	Angled Hoe	



SPEAR & JACKSON ELEMENTS

Elements Hand Trowel

- Essential planting and weeding tool, ideal for use in borders, tubs and pots
- 5" Handle
- Leather wrist strap for carrying and hanging up after use



Elements Transplanting Trowel

- Narrow blade for transplanting plants
- Graduated blade markings for easier measurement when planting
- 5" Handle
- Leather wrist strap for carrying and hanging up after use

CODE	DESCRIPTION	PRICE
SUSJ4054NB	Elements Transplanting Trowel	


Elements Long Handled Trowel

Long handle improves reach and helps to reduce back strain



Elements Dandelion Weeder


Strong round bar and notched tip for weeding dandelions, with a long shaft to reach and tap roots



ı	CODE	DESCRIPTION	PRICE
	SUSJ4059NB	Elements Dandelion Weeder	

Elements Weed Fork

Ideal for breaking up compacted soil around shrubs and plants





Elements Long Handled Weed Fork

Long handle improves reach and helps to reduce back strain



CODE	DESCRIPTION	PRICE
SUSJ4060NB	Elements Long Handled Weed Fork	

Elements Soil Scoop

Deep dish blade for greater soil capacity

Leather wrist strap for carrying and hanging up after use



CODE SUSJ4055NB Elements Soil Scoop

Elements Dibber

Use for forming holes in soil for planting seeds and

after use



CODE	DESCRIPTION	PRICE
SUSJ4062NB	Elements Dibber	

FELCO SECATEURS

The World's Finest Ergonomic Secateurs.

FELCO 2

One-hand pruning shear | High performance | Classic model

Reliable: Comfortable, light, sturdy handles made of forged aluminium with a lifetime guarantee* / blade and riveted anvil blade made of high-quality hardened steel / clean, precise cut / all parts can be replaced.

Efficient: Easy, durable cutting adjustment / wire cutting notch / sap groove.



CODE	DESCRIPTION	PRICE
FEL02	FELCO 2	
FELP291	Replacement Springs (Blister Pack x 2)	
FELPL208	Replacement Cutting Blade	
FELP290	Centre Mechanism Repair Kit	

FELCO 4

One-hand pruning shear | Good performance | Standard model

Reliable: Comfortable, light, sturdy handles made of forged aluminium with a lifetime guarantee* / blade and riveted anvil blade made of high-quality hardened steel / clean, precise cut / all parts can be replaced.

Efficient: Easy cutting adjustment / wire cutting notch / sap groove.



CODE	DESCRIPTION	PRICE
FEL04	FELCO 4	
FELP291	Replacement Springs (Blister Pack x 2)	
FELPL208	Replacement Cutting Blade	

FELCO 902

Sharpening tool | Sharpening stone

Medium and fine grained high purity corundum sharpening stone. Easy to use, it keeps its shape, and is ideal for the sharpening of pruning shears. For pruning shears and cable cutters.





CODE	DESCRIPTION	PRICE
FELPF902	FELCO 902 Sharpening Stone	

FELCO 5

One-hand pruning shear | Good performance | Basic model

Reliable: Sturdy steel handles / blade and anvil blade made of high-quality hardened steel / clean, precise cut / all parts can be replaced.

Efficient: Easy cutting adjustment.



CODE	DESCRIPTION	PRICE
FEL05	FELCO 5	
FELP591	Replacement Springs (Blister Pack x 2)	
FELPL21089	Replacement Cutting Blade	

FELCO 6

One-hand pruning shear | High performance | Compact

Reliable: Comfortable, light, sturdy handles made of forged aluminium with a lifetime guarantee* / blade and screw-mounted anvil blade made of high-quality hardened steel / clean, precise cut / all parts can be replaced.

Efficient: Easy, durable cutting adjustment / wire cutting notch / sap groove.

Ergonomic: Hand and wrist protection are provided by the ideal shape of the handles and the cushion-shock absorber / Non-slip coating.

Cut dia.: 20mm Weight: 210g Length: 195mm For medium hand



Centre Mechanism Repair Kit

FELCO 14

FELP690

One-hand pruning shear | Bypass | Ergonomic - Small Size

Reliable: Comfortable, light, sturdy handles made of forged aluminium with a lifetime guarantee* / blade and screw-mounted anvil blade made of high-quality hardened steel / clean, precise cut / all parts can be replaced.

Efficient: Easy, durable cutting adjustment / wire cutting notch / sap groove.

Ergonomic: Hand and wrist protection are provided by the ideal shape of the handles and the cushion-shock absorber / Non-slip coating.

Cut dia.: 18mm Weight: 195g Length: 180mm For small hand



CODE	DESCRIPTION	PRICE
FEL14	FELCO 14	
FELP143	Replacement Cutting Blade	
FELP690	Centre Mechanism Repair Kit	

FELCO SECATEURS

FELCO 7

One-hand pruning shear | High performance | Ergonomic

Reliable: Comfortable, light, sturdy handles made of forged aluminium with a lifetime guarantee* / blade and screw-mounted anvil blade made of high-quality hardened steel / clean, precise cut / all parts can be replaced.

Efficient: Easy, durable cutting adjustment / wire cutting notch / sap groove.

Ergonomic: Hand and wrist protection, and optimisation of the force exerted are provided by the revolving handle, the angled head and the cushion-shock absorber / Non-slip coating.





CODE	DESCRIPTION	PRICE
FEL07	FELCO 7	
FELP291	Replacement Springs (Blister Pack x 2)	
FELPL21246	Replacement Cutting Blade	
FELP790	Centre Mechanism Repair Kit	

FELCO 10

Left-hand pruning shear | High performance | Ergonomic

Reliable, efficient and ergonomic as the



CODE	DESCRIPTION	PRICE
FEL10	FELCO 10	
FELP291	Replacement Springs (Blister Pack x 2)	
FELPL21766	Replacement Cutting Blade	
FELP790	Centre Mechanism Repair Kit	

Leather Holster

910 - Leather holster with belt loop and clip, for safety and easy carrying.

912 - Cone shaped leather holster with belt loop.

CODE	DESCRIPTION	PRICE
FELPF910	Flat Leather Holster	
FELPF912	Cone Leather Holster	



FELCO 8

One-hand pruning shear | High performance | Ergonomic

Reliable: Comfortable, light, sturdy handles made of forged aluminium with a lifetime guarantee* / blade and screw-mounted anvil blade made of high-quality hardened steel / clean, precise cut / all parts can be replaced.

Efficient: Easy, durable cutting adjustment / wire cutting notch / sap groove.

Ergonomic: Hand and wrist protection, and optimisation of the force exerted are provided by the ideal shape of the handles, the angled head and the cushion-shock absorber / Non-slip coating.





Replacement Cutting Blade

Centre Mechanism Repair Kit

FELCO 9

FELPL21246

FELP790

Left-hand pruning shear | High performance | Ergonomic

Reliable, efficient and ergonomic as the FELCO 8 above.

Cut dia.: 25mm Weight: 245g Length: 210mm For large hand



CODE	DESCRIPTION	PRICE
FEL09	FELCO 9	
FELP291	Replacement Springs (Blister Pack x 2)	
FELPL21766	Replacement Cutting Blade	
FELP790	Centre Mechanism Repair Kit	

Pruning Saw

F600 - High carbon hard chrome plated tool steel blade which gives a clean precise finish and easily cuts through 31/2" diameter branches. Blade length is 16cm.



F621 - Rust resistant, hard chromed blade made of high quality steel. Complete with safety sheath and belt loop. Blade length is 24cm.



CODE	DESCRIPTION	PRICE
FELF600	F600 Folding Saw	
FELPF6003	Replacement Blade F600	
FELF621	F621 Pruning Saw	
FELPF6213	Replacement Blade F621	

TOMATO, CUCUMBER & PEPPER PRODUCTION

Clip 22mm

The tomato clip fastens the plant to the string support without damaging the stem. As the clips are closed around the stem and locked, it grips the string to hold the clip in place. Plastic and biodegradable material.

Grafting Clip

Several styles to choose from, please call the office for prices.



Truss Support Clip

There are different support clips available to prevent truss stem breakages. This occurs when the weight of the fruit on a tomato truss is too heavy for the truss to bear. This results in reduced fruit size as a result of the stem kinking, or even crop losses if the truss breaks off.







Truss Support Tape 45mm x 100m

Purpose designed to support strawberry trusses in table top growing systems. Features soft edges - gentle on plants and fruit.

CODE	DESCRIPTION	BOX	PRICE
BTC22T	Bato Clip 22mm - Terracotta	10,000	
BGC15	Grafting Clip 1.5mm	10,000	
DELTSC1001	Truss Superflex Clip	25,000	

Electric Pipe Rail Trolley - TYPE MPT-2

Scissor lift : Double hydraulic

Drive : Reductor with 0.37 kW motor

Speed : 0-58 m per min.

Frame size : 185 cm x 72 cm

Batteries : Full traction 110 Amp.

Control box : with tip buttons

Pipe rail size : From 42.5 cm c.t.c.

Lifting wheels : Hydraulic wheels

Battery indicator : yes Tilt alarm : yes Error indicator : yes

Scissor

Length deck : 175 cm Min. height : 55 cm Max. height : 315 cm Lift capacity : 150 kg

Lowering speed: 1 person, 10 cm per sec.

There are also several options and special features like: hinge platform with footswitch, 24V socket, deck with entry on both sides, built-in battery chargers, electric stamps and more.

SOME ADVANTAGES:

- Low step
- Easy access for maintenance
- Reliable controls
- Standard with battery indicator and error indicator
- Simple controls
- High- and fast lifting capacity

Suspended Gutters for Various Crops

Growing at a higher level

More and more growers of vegetables, fruit, flowers and pot plants are discovering the benefits of gutter systems. LS Systems can supply a complete range of gutters for various crops, offering the ideal solution for every crop.

The benefits

The rise of closed cultivation systems has meant a major evolution in gutter cultivation. In many cases 100% closed cultivation is a basic environmental requirement. With crop cultivation gutters from FormFlex you can meet those requirements and save production and labour costs as well.

The use of gutter systems fits in with the trend towards closed cultivation systems, and offers many benefits:

- drainage water and fertilisers can be captured for reuse
- · even water distribution between plants
- · optimum air circulation through the crop
- better control of crops' vegetative or generative growth
- reduced spread of pests and diseases
- improved working conditions for your employees by working at an optimum height
- · higher labour productivity

These benefits result in a higher yield with higher quality.





Direct moulding at your location

FormFlex has developed a revolutionary procedure for producing gutter systems. Modern mobile profiling machines roll form your gutters on site. One important benefit: gutters can be produced in continuous lengths to any required specification and are always in one piece. Joints are a thing of the past. The gutters can be hung or supported, depending on the crop and greenhouse construction.

TOMATO, CUCUMBER & PEPPER PRODUCTION

Pallet Wrap

Stretch film with the useful property of 'inside cling' only which prevents pallets sticking together.

SFC17: 400mm x 300m on PVC extended cores.

Please call for pallet prices.



CODE	PRICE PER BOX OF 6
SFC17	

Stretch Net Wrap

An ideal option for growers wrapping pallets of fruit, lettuce and tomatoes etc. It offers good air circulation around the pallet to prevent sweating. The net stretches during wrapping to ensure the produce remains tightly packed.

Size 500mm x 500m.

Please call for pallet prices.

CODE	PRICE PER ROLL
SFNP500	

A versatile pre-stretched ventilated film

This is perfect for solving problems when there is a build up of condensation or moisture. Such as hot or chilled/frozen products.

USE LESS - SAVE MORE

Due to the unique design you need less material to wrap a load when c ompared to alternative solutions.

INCREASED GRIP

It is made using a carefully controlled formula of plastic compounds, giving the film a powerful ability to grip the

PREVENT CONDENSATION

if condensation is allowed to build up within a load then there can be many problems. It may become unstable and fall over, it might damage the outer packaging, thereby spoiling the delivery or, in extreme cases, the product itself.



EXCELLENT PALLET PERFORMANCE

The superb holding force in combination with its impressive lateral strength ensures perfect pallet stabilisation without damaging the carton boxes or other packaging materials.

NO REDUCTION IN WIDTH

Regular stretch film and knitted netting reduce in width after stretching. It retains its width, saving you time, material and cost.

FORKLIFT FRIENDLY

Like netting, the reinforcing strips on competitive products can often come away from the base film and become entangled within the wheels and bearings of forklifts. The design this film prevents this from happening.

CODE	HAND WRAP	PRICE EACH (6/BOX)
SFC22	500mm x 250m (51mm core)	

Expert Horti Twine

Expert Horti Twine is the ideal product for a wide range of applications in Horticulture, Gardening, Greenhouse's utilities such as Tomato, Peppers and Cucumber crops.

String 1200m/kg 6kg Spool

- Flexible and soft surface to prevent damage to crop
- Excellent wear resistance
- High UV resistance

CODE

PT1200W

- High breaking strength
- **Excellent Free Fall Ability**



TOMATO LAYERING HOOK

- Time saving system thanks to unique Quickhook-cardboard.
- Very easy to use, with handles for right-handers and left-handers.
- The hooks are loosely secured to cardboard in a way that they don't fall off or get entangled.
- Number of colours possible in one layer.
- The quickest and therefore most profitable system available.
- Price on application, 180-220mm available.





Poly Baler Twine

Medium: 12,000 feet per pack of 2.

Price is per 1 spool, sold in packs of 2.



CODE	COLOUR	PRICE
PTPBM	Medium 12.000 Ft	

Fruit & Bush Pruner (Curved Blade) For the professional, ideal for picking fruit and cutting buds etc.

Blade is made from high quality carbon steel. Special heat treatment ensures blade hard and tough. Handles are blue with non-slip coating - hard to lose in a box of tomatoes!

Blade style: Curved (round at

the top) 165mm Length: (blade: 23mm)

Weight: 106g

CODE

SUN095



sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

DANISH TROLLEYS & ACCESSORIES

Danish Trolley Complete

Base, four posts and three shelves. Hot-dipped galvanised for rust free life.

Can be powder coated in bespoke colours.

These are not CC trolleys and therefore cannot be used in a CC trolley system.

Size: 135 x 56.5 x 190cm

Base





Euro Watering Tray

Screen Peg

For securing labels





CODE	DESCRIPTION	PRICE
LSDTT	Danish Trolley Complete	
LSDTB	Base	
LSDTS	Shelf (126.0 x 55.0 cm)	
LSDTPBS	Plywood Inserts for Shelf	
LSDTP	Posts 190cm	
LSDTWFF	PP Wheel - Fixed Frame	
LSDTWSF	PP Wheel - Swivel Frame	
MOD2000	Euro Watering Tray	
MOD2005	Danish Watering Tray	
SDR1031100	Screen Peg (Pack of 100)	

Display Maker

With this tool you can pull out the posts of a Danish Trolley. When you pull out the two posts on the long side of the trolley, all the shelves are at an angle. One or two holes higher, and now you have a display in just 5 seconds!



CODE	DESCRIPTION	PRICE
LSDTDM	Danish Trolley Display Maker Galvanised Steel (1kg) 460 x 35 x 35 mm 2 required per trolley	

Danish Trolley Mover

Wheels are 100mm wide, 400mm

A simple yet very effective way of moving trolleys around the nursery or Garden Centre. The pneumatic wheels allow fully laden trolleys to be moved over bare ground, across gullies and from one level of concrete path to another.

Our latest models are equipped with a trolley security system which keeps the trolley locked on the Trolley Mover.



CODE	DESCRIPTION	PRICE
LSDTM	Danish Trolley Mover	

Danish Trolley Track

Trolley tracks with a wheel guide and inter-linking for Danish Trolley's.

Advantages:

- Very easy to lay
- A significantly reduced weight compared to concrete slabs
- Ideal for stationary and mobile purposes
- With a roller guide and inter-linking
- A pedestrian area with anti-slip protection (pimples)


Specifications:

- Section Length: 1.2 m
- Width (inside): 51 cm
- Width (outside) 53 cm













Multi-connect Plates are combinable as a turning area with the Danish Trolley Track

CODE	DESCRIPTION	PRICE
LSDTST12	Track 1.2 m	
LSDTSTRB	Ramp - Bottom	
LSDTSTRT	Ramp - Top	
LSDTSTTP20080	Multi-connect Plates	

SVENSSON® SHADING SCREENS

Harmony: High grade light diffusion

Many Harmony screens have an open structure improving their cooling and shading performance, especially in greenhouses with vents. But some have a closed structure. In the evening this slows down any sudden loss of greenhouse heat and reduces the risk of condensation on the crop. And at night, it saves

The benefits of Harmony

- High grade light diffusion actively scatters the sunlight to reach deeper and more evenly into the crop.
- Less risk of burning and more light exposure at a cooler temperature.
- Improved productivity and stronger healthier plants due to more even light distribution to upper and lower sections of the crop.
- A gentle and effective environment not only for plants but also the people working in the greenhouse.
- Increased crop quality due to lower temperature of the fruit or flower.

What else can you expect

- A long service life thanks to their resistance to harsh temperatures.
- Small bundle sizes thanks to our unique knitting techniques.
- Favourable humidity control this means that condensation is less likely to form on the underside of an indoor screen and less likely to drop on your plants.
- A variety of flame retardent levels many of these meet the industry's highest fire safety standards.

Complete design and installation service

- Materials can be cut an sewn to almost any width and length
- Please call for further information and prices

Screen Peg

For fastening material to a wire, leading edge etc.



Screen Hook

For securing screen material at the sides.



S-Hook

Connects the screen to a wire.



Nylon Monofil Wire

- 2.5mm diameter
- 1800m on a reel

HORSNL



1800m Nylon Monofil 2.5mm

Harmony: *closed structure, flame retardent*

		ENERGY	SHADING LEVEL		
CODE		SAVING	DIRECT	DIFF.	PER M ²
TSMHAR2747FR Std widths: 4.70, 5.30m		47%	27%	36%	
TSMHAR3647FR Std widths: 4.30, 5.30m		47%	36%	44%	
TSMHAR4647FR Std widths: 3.35, 4.30, 4.70, 5.30m		47%	46%	53%	
TSMHAR5747FR Std widths: 3.35, 4.30, 4.70m		47%	57%	62%	
TSMHAR7247FR Std widths: 4.70m		47%	72%	73%	

Harmony: open structure, flame retardent

	ENERGY	SHADING LEVEL		
CODE	SAVING	DIRECT	DIFF.	PER M ²
TSMHAR2515OFR Std widths: 4.30, 4.70m	15%	23%	30%	
TSMHAR3315OFR Std widths: 4.30, 4.70, 5.30m	15%	33%	39%	
TSMHAR4515OFR Std widths: 4.30, 4.70, 5.30m	15%	42%	46%	
TSMHAR52200FR Std widths: 4.70, 5.30m	20%	52%	56%	



RB Series Tubular Motors

Tubular motors with noiseless, maintenance free transmissions and single phase electric motors for rolling screen systems. The motor fastens inside the end of the rolling screen tube and has a square shaft to locate on a guide carriage which runs up and down an aluminium guide rail.

RB50E is tubular motor with electronic limit switch and high water resistance (IP55).





CODE	DESCRIPTION	PRICE
RI550016	RB40-11 0.26kW 11rpm	
RI550032	RB50E-3.5 0.16kW 3.5rpm	
RI550180	RB120-11 0.48kW 11rpm	
RI275510	RMC50 Motor Control Unit	

RIDDER DRIVE SYSTEMS

RW45 Motor Gearboxes

Medium duty compact self-braking gearboxes for a variety of applications with single or three phase motors. Available with two output shafts for use with chain couplings.

TYPE	RPM	nM	kW	230v	400v
RW45-1	1	120	0.09	1.10 A	0.41 A
RW45-2	2	100	0.09	1.10 A	0.41 A
RW45-3	3	90	0.09	1.10 A	0.41 A
RW45-5	5	54	0.09	1.10 A	0.41 A



RW45

RW45 motor gearboxes fitted with a double sided shaft suitable for chain couplings. 1, 2, 3 or 5 rpm output speed with linear limit switch and emergency stop for maximum of 97 revolutions. Option for installation of a multi-turn potentiometer to give positive feedback for computer control.

CODE	DESCRIPTION	PRICE
RI502000	RW45 1rpm 3ph	
RI531094	RW45 2rpm 3ph	
RI502010	RW45 3rpm 3ph	
RI502020	RW45 5rpm 3ph	
RI502030	RW45 1rpm 1ph	
RI531092	RW45 2rpm 1ph	
RI502040	RW45 3rpm 1ph	
RI502050	RW45 5rpm 1ph	



RW45 Chain Couplings

Chain coupling sets ½" x 5/16" x 12 tooth, weld-on for 1" (33.7mm OD) and 2" (60.3mm OD) drive shafts and bolt-on for 1" (33.7mm OD) and 1¼" (42.4mm OD) drive shafts. Two sets required per gearbox.



CODE	DESCRIPTION	PRICE
RI590000	Weld-on chain coupling set 1"	
RI590003	Weld-on chain coupling set 11⁄4"	
RI590099	Weld-on chain coupling set 2"	
RI590001	Bolt-on chain coupling set 1"	
RI590002	Bolt-on chain coupling set 11/4"	

RW45 Mounting Brackets

Other sizes and un-galvanised brackets are also available. Please ask for details.

CODE	DESCRIPTION	PRICE
RI417645	RW45 Galv. Right Angle Bracket H=75mm	
RI417646	RW45 Galv. Right Angle bracket H=90mm	
RI414970	RW45 Galv. Flat Bracket B=195mm	

RW240/400/600 Mounting Brackets

Other sizes and un-galvanised brackets are also available. Please ask for details.

CODE	DESCRIPTION	PRICE
RI417636	RW240/400/600 Galv. Right Angle Bracket H=90mm	
RI413922	RW240/400/600 Galv. Flat Bracket B=163mm	

RW240 Motor Gearboxes

Heavy duty gearboxes for a variety of applications with single phase or three phase motors. Available with 2 output shafts for use with chain couplings.

TYPE	RPM	nM	kW	230v	400v
RW240-1	1	240	0.09	1.10 A	0.41 A
RW240-2	2	240	0.25	-	0.70 A
RW240-2	2	240	0.18	1.80 A	-
RW240-3	3	240	0.25	2.40 A	0.70 A
RW240-5	5	240	0.37	3.00 A	1.10 A



RW240

RW240 with a double sided shaft suitable for chain coupling. 1, 2, 3 or 5 rpm output speed with linear limit switch and emergency stop for maximum of 86 revolutions. Option for installation of a multi-turn potentiometer to give positive feedback for computer control.

CODE	DESCRIPTION	PRICE
RI502300	RW240 1rpm 3ph	
RI532410	RW240 2rpm 3ph	
RI502310	RW240 3rpm 3ph	
RI502320	RW240 5rpm 3ph	
RI502330	RW240 1rpm 1ph	
RI532406	RW240 2rpm 1ph	
RI502340	RW240 3rpm 1ph	
RI502350	RW240 5rpm 1ph	

RW400 Motor Gearboxes

Heavy duty gearboxes for a variety of applications with single phase or three phase motors. Available with 2 output shafts for use with chain couplings.

I	TYPE	RPM	nM	kW	230v	400v
	RW400-1	1	400	0.12	-	0.46 A
	RW400-1	1	400	0.18	1.80 A	-
	RW400-3	3	400	0.37	3.00 A	1.10 A
	RW400-5	5	400	0.55	4.50 A	1.40 A



RW400

RW400 with a double sided shaft suitable for chain coupling. 1, 2, 3 or 5 rpm output speed with linear limit switch and emergency stop for maximum of 86 revolutions. Option for installation of a multi-turn potentiometer to give positive feedback for computer control.

	CODE	DESCRIPTION	PRICE
	RI502200	RW400 1rpm 3ph	
	RI502210	RW400 3rpm 3ph	
	RI502220	RW400 5rpm 3ph	
	RI502230	RW400 1rpm 1ph	
ĺ	RI502240	RW400 3rpm 1ph	
Ì	RI502250	RW400 5rpm 1ph	

RW240/400 Chain Couplings

Bolt and weld-on chain couplings $\frac{5}{8}$ " x $\frac{3}{8}$ " x 16 tooth for 1", $\frac{1}{4}$ " and 2" drive shafts. Two sets required per gearbox.

CODE	DESCRIPTION	PRICE
RI590011	Weld-on chain coupling set 1" & 2"	
RI590012	Weld-on chain coupling set 11/4"	
RI590016	Bolt-on chain coupling set 1"	
RI590014	Bolt-on chain coupling set 11/4"	

RIDDER DRIVE SYSTEMS

RW600 Motor Gearboxes

Heavy duty gearboxes for a variety of applications with single or three phase motors. Available with two output shafts for use with chain couplings.

TYPE	RPM	nM	kW	230v	400v
RW600-3	3	600	0.55	4.50 A	1.40 A
RW600-5	5	600	1.10	6.50 A	2.80 A



RW600

RW600 motor gearboxes fitted with a double sided shaft suitable for chain couplings. 3 or 5 rpm output speed with linear limit switch and emergency stop for maximum of 86 revolutions. Option for installation of a multi-turn potentiometer to give positive feedback for computer

CODE	DESCRIPTION	PRICE
RI502410	RW600 3rpm 3ph	
RI502420	RW600 5rpm 3ph	
RI502440	RW600 3rpm 1ph	
RI502450	RW600 5rpm 1ph	



RW600 Chain Couplings

Weld-on chain coupling sets \%" x \3\%" x 16 tooth for 1", 1\4" and 2" drive shafts. Two sets required per gearbox.

CODE	DESCRIPTION	PRICE
RI590011	Weld-on chain coupling set 1" & 2"	
RI590012	Weld-on chain coupling set 1¼"	



RW1000 & RW1400

Extra heavy duty gearboxes providing powerful solutions for driving ventilation and screen systems in a greenhouse.

CODE	DESCRIPTION	PRICE
RI520101	RW1000 3rpm 3ph	
RI520151	RW1000 5rpm 3ph	
RI520301	RW1000 3rpm 1ph	
RI520201	RW1400 3rpm 3ph	



RW1000/RW1400 **Chain Couplings**

Weld-on chain coupling sets 3/4" x 7/16" x 16 tooth for 1", 11/4" and 2" drive shafts. Two sets required per gearbox.

CODE	DESCRIPTION	PRICE
RI590051	Weld-on chain coupling set 1" & 2"	
RI590052	Weld-on chain coupling set 11⁄4"	

RW1000/RW1400 Mounting Brackets

Mounting brackets including M12 x 110 bolts, nuts and washers for the 50mm post set and M12 x 120 bolts, nuts and washers for the 60mm post set.

CODE	DESCRIPTION	PRICE
RI421695	Mounting Bracket K100-120mm	
RI423372	Mounting Bracket K140-160mm	
RI503498	Mounting Set 50mm RW1400	
RI503496	Mounting Bracket 60mm RW1400	

Torque Tube Bearing Plates

All torque tubes used in commercial greenhouses are made from standard galvanised steel tube. The standard for TU11 rack and pinion systems is 1" nominal bore tube. 11/4" tube is used for connecting the heavier duty rack and pinions together.



Bearing Plates 1" (33.7mm OD)

Zinc plated bearing plates with a self lubricating sintered bronze bearing for 1" torque tube. Various sizes listed below, other sizes available on request (including 11/4 Bearing Plates). Maximum load 500 N.

L = overall length of plate

B = distance from base of plate to centre of bearing

CODE	DESCRIPTION	PRICE
RI503086	L = 95mm B = 62mm	
RI503089	L = 100mm B = 67mm	
RI503090	L = 105mm B = 72mm	
RI503095	L = 110mm B = 77mm	
RI503100	L = 120mm B = 87mm	
RI503102	L = 130mm B = 97mm	
RI503101	L = 140mm B = 107mm	
RI503106	L = 150mm B = 117mm	
RI503138	L = 191.5mm B = 158.5mm	
RI503105	L = 200mm B = 167mm	
RI503139	L = 211.5mm B = 178.5mm	
RI503110	L = 220mm B = 187mm	



Right Angle Bearing Plates 1"

Zinc plated bearing plates with a self lubricating sintered bronze bearing for 1" torque tube. Various sizes listed below, other sizes available on request (including 11/4 Bearing Plates). Maximum load 500 N.

H = distance from base of plate to centre of bearing

CODE	DESCRIPTION	PRICE
RI503115	H = 70mm	
RI503119	H = 75mm	
RI503116	H = 80mm	
RI503117	H = 90mm	
RI503118	H = 100mm	
RI503148	H = 120mm	
RI503134	H = 133.5mm	
RI503137	H = 153.5mm	



Ridder AXT Grease

High quality ivory-coloured grease for perfect lubrication of slide bearings and rack drives. Suitable for high temperatures (up to 175°C) and high pressures. Watersoluble grease.

CODE	DESCRIPTION	PRICE
RI565020	AXT Grease 1kg	
RI565001	AXT Grease 5kg	

Spheerol Gel

CODE	DESCRIPTION	PRICE
RI565030	Spheerol Grease (RW45) 1L	

RIDDER RACK & PINION SYSTEMS



TU11 Pinion Houses

Galvanised steel housing with hardened steel pinion on self-lubricating sintered bronze bearings for 1" (33.7mm OD) torque tubes. Heavy duty plastic rack guide rollers on stainless steel pins.

- TU11-22 is for 22mm high racks, 395-1451mm long
- TU11-30 is for 30mm high racks, 1451-1953mm long

CODE	DESCRIPTION	PRICE
RI500010	TU11-22 Pinion and Housing	
RI500030	TU11-30 Pinion and Housing	

TU11 Straight Racks

Straight 3mm galvanised pressed steel racks for TU11 system. Supplied with 57mm plain end to stop the rack running out of the pinion housing at full deflection.

L = total length of rack H = height of side

CODE	DESCRIPTION	PRICE
RI417567	L = 390mm H = 22mm	
RI417569	L = 490mm H = 22mm	
RI417571	L = 591mm H = 22mm	
RI417573	L = 691mm H = 22mm	
RI418080	L = 792mm H = 22mm	
RI418082	L = 892mm H = 22mm	
RI418085	L = 1043mm H = 22mm	
RI418089	L = 1244mm H = 22mm	
RI418093	L = 1445mm H = 22mm	
RI413973	L = 1646mm H = 30mm	
RI413979	L = 1747mm H = 30mm	

TU11 Racks Curved In

3mm galvanised pressed steel racks curved in towards the teeth. Used to allow additional clearance over straight racks. Radius of curve 1000mm. Other radii on request.

L = total length of rack (measured around the curve)

H = height of side





TU11 Window Connector

To connect the end of a TU11 rack onto a window/ventilator. Supplied complete with stainless steel pivot bolt and lock nut.

CODE	DESCRIPTION	PRICE
RI500021	TU11 Window Connector	

TR520S Rack and Pinion System

Rack and pinion system with a 2.76:1 reduction for operating truss rail ventilation system in Venlo greenhouses. Maximum input torque 37.7nM. Maximum output force 5200 N.



TR520S Pinion Housings

Galvanised steel pinion housing for use with 16mm wide solid steel TR520S racks. Housing available in either 40 or 60mm (standard) height from base to centre of coupling bolt hole in rack.

www.lssystems.co.uk

CODE	DESCRIPTION	PRICE
RI540000	TR520S H = 60mm	
RI540100	TR520S H = 40mm	

TR520S Racks

Galvanised 16mm wide solid steel racks type mb4/16 for use with TR520S pinion housings.

CODE	DESCRIPTION	PRICE
RI406244	L = 1050mm	
RI416549	L = 1250mm	
RI416745	L = 1400mm	
RI416748	L = 1550mm	
RI418931	L = 1700mm	



TR520S Rack Coupling Plates

Couplings for connecting 16mm TR520S racks to 27 or 32mm push/pull tubes.

CODE	DESCRIPTION	PRICE
RI416489	TR520S Coupling Plate for 27mm Tube	
RI416490	TR520S Coupling Plate for 32mm Tube	

TR1000S Rack and Pinion System

A heavy duty version of the TR520S rack and pinion system with a 2.76:1 reduction for operating truss rail ventilation system in Venlo greenhouses. Maximum input torque 58nM. Maximum output force 8000 N.



TR1000S Pinion Housings

Galvanised steel pinion housing for use with 20mm wide solid steel TR520S racks. Housing available in either 40 or 60mm (standard) height from base to centre of coupling bolt hole in rack.

CODE	DESCRIPTION	PRICE
RI540050	TR1000S H = 60mm	
RI540150	TR1000S H = 40mm	

TR1000S Racks

Galvanised 20mm wide solid steel racks type mb4/20 for use with TR1000S pinion housings.

CODE	DESCRIPTION	PRICE
RI416921	L = 1050mm	
RI416919	L = 1250mm	
RI416922	L = 1400mm	
RI416920	L = 1550mm	
RI416924	L = 1700mm	

TR1000S Rack Coupling Plates

Couplings for connecting 20mm TR1000S racks to 27mm push/pull tubes.

CODE	DESCRIPTION	PRICE
RI418736	TR1000S Coupling Plate for 27mm Tube	

RIDDER RACK & PINION SYSTEMS

TR520S & TR1000S Accessories



TR520S/TR1000S Weld-on Slide Couplings

Couplings for 1" or $1\frac{1}{4}$ " torque tube which slide onto TR520S/TR1000S input shaft at other end.

CODE	DESCRIPTION	PRICE
RI401635	TR520S x 1" Coupling	
RI421978	TR520S/TR1000S x 11/4" Coupling	
RI419404	TR520S x 1" Bolt Coupling	

TR520S/TR1000S Chain Couplings

Chain coupling sets for connecting TR520S/1000S to $1\frac{1}{4}$ " (42.4mm OD) torque tube. Each TR520S/1000S pinion shaft requires one chain wheel and one weldon chain coupling set complete with $\frac{5}{4}$ " x $\frac{3}{4}$ " x 16 tooth duplex chain.

CODE	DESCRIPTION	PRICE
RI416881	TR520S/1000S Shaft Chain	
RI590012	Weld-on chain coupling set 11/4"	



TR10i/24 Rack & Pinion System

Rack and pinion system for operating swinging ventilation system in Venlo greenhouses with gutter distance of 3.2m.

Rack & Pinion with Fork Mounting

CODE	DESCRIPTION	PRICE
	teel pinion housing with 1:1 reduction ratio and steel rk bolts to gutter.	rack.
RI500310 TR10i S = 750mm fork		
RI500314	TR10i S = 900mm fork	

Rack & Pinion with Universal Mounting

CODE	DESCRIPTION	PRICE
	teel pinion housing with 1:1 reduction ratio and stee ersal mounting bolts to gutter.	rack.
RI500312	TR10i S = 750mm universal	

Reversing Rack & Pinion with Fork Mounting

CODE	DESCRIPTION	PRICE
Galvanised s	teel pinion housing with 1:1 reduction ratio and steel	rack.
Additional gear wheel to reverse operating direction for systems where		
windward and leeward vents need to be driven by a single motor. Mounting		
fork bolts to gutter.		
RI500330	TR10i reversible S = 750mm	

Reversing R. & Pinion - Universal Mounting

CODE	DESCRIPTION	PRICE
Additional g ward and lee	Galvanised steel pinion housing with 1:1 reduction ratio and steel rack. Additional gear wheel to reverse operating direction for systems where windward and leeward vents need to be driven by a single motor. Hinged universal mounting bolts to gutter.	
RI500332	TR10i reversible S = 750mm universal	

TR10i/24 Weld-on Slide Couplings

Couplings for 1" or $1\frac{1}{4}$ " torque tube which slide onto TR10i input shaft at other end.

CODE	DESCRIPTION	PRICE
RI401635	TR10 x 1"Weld Coupling	
RI421978	TR10 x 1¼" Weld Coupling	



TR25i/24 Rack & Pinion System

Rack and pinion system for operating swinging ventilation system in Venlo greenhouses. Galvanised steel pinion housing with 2.76:1 reduction ratio and steel rack.

Rack & Pinion with Fork Mounting

CODE	DESCRIPTION	PRICE			
Mounting fo	Mounting fork bolts to gutter. Gutter spacing 3.2m				
RI500510	TR25i S = 750mm fork				
RI500511	TR25i S = 900mm fork				
Mounting fork bolts to gutter. Gutter spacing 4.0m					
RI500514	TR25i S = 750mm fork				
RI500516	TR25i S = 900mm fork				

Rack & Pinion with Universal Mounting

CODE	DESCRIPTION		
Hinged universal mounting bolts to gutter. Gutter spacing 3.2m			
RI500512 TR25i S = 750mm universal			
Hinged universal mounting bolts to gutter. Gutter spacing 4.0m			
RI500541	TR25i S = 900mm universal		

TR25i/24 Weld-on Slide Couplings

Couplings for 1" or 1¼" torque tube which slide onto TR25i input shaft at other end.

CODE	DESCRIPTION	PRICE
RI401635	Weld coupling for 1" tube	
RI419404	Bolt-on coupling for 1" tube	
RI421978	Weld coupling for 1¼" tube	

HRS Reverse Starters

Control units with overloads for connecting Ridder RW series single or three phase motors. Forward, reverse and off switch positions. Provided with terminals for limit and safety switches and 24V DC external control. (24V AC external control extra). Also available with timeclock - please ask for details.

CODE	DESCRIPTION	SUITABLE FOR:	PRICE
RIECH1D HRS 1-ph 1.0 - 1.5 Amp RW4.		RW45 (-3.5)	
RIECH1E	HRS 1-ph 1.4 - 2.1 Amp	RW401, RW242	
RIECH1F	HRS 1-ph 1.8 - 2.7 Amp	RW243	
RIECH1G	HRS 1-ph 2.4 - 3.6 Amp	RW245, RW403	
RIECH1H	HRS 1-ph 3.4 - 5.0 Amp	RW405, RW603	
RIECH1K	HRS 1-ph 5.5 - 8.5 Amp	RW605, RW1000	
RIECH3B HRS 3-ph 0.45 - 0.67 Amp RW45 (-3.5), RW241, RW401			
RIECH3C	HRS 3-ph 0.67 - 1.0 Amp	RW243	
RIECH3D	HRS 3-ph 1.0 - 1.5 Amp	RW245, RW403	
RIECH3E	HRS 3-ph 1.4 - 2.1 Amp	RW405, RW603	
RIECH3G	HRS 3-ph 2.4 - 3.6 Amp	RW605	
RIECH3K	HRS 3-ph 5.5 - 8.5 Amp	RW1000-5, RW1400-3	

Shaft Retaining Clip

A stainless steel clip which holds the torque tube in place between pinion housings. The clip can be removed to allow removal of the torque tube.

Mounting Washer

A heavy duty square mounting washer, 45mm x 45mm which fits under the trellis girder to prevent distortion when mounting TR520S or TR1000S.

CODE	DESCRIPTION	PRICE
RI418694	Shaft Clip	
RI412815	Mounting Washer	

HORTICULTURAL GLASS & ACCESSORIES

Horticultural Glass

In stock all year round!

Sold by the crate which can be delivered locally or collected from our yard. For deliveries further afield glass is transported at your own risk as insurance for transporting glass is impossible to obtain these days. Prices are ex works and

The uncertain weather conditions we experience can sometimes lead to a rush in demand and hence stretch our resources. Therefore, it is advisable that growers keep their own stock on their nursery.

Glasshouse Maintenance Aid

- Powder coated finish
- Strong tubular frame
- **Fitted footrests**
- Easy to manoeuvre along valley of glasshouse
- Gives added stability to worker using power washer etc.
- Safety chain at rear
- Hooks fitted to hold washing lance

Personnel frame: 650(L) x 650(W) x 750(H) mm Overall size: 2800(L) x 1000(W) x 750(H) mm



CODE	SIZE	THICK	CRATE	EACH	CRATE
G610/610	24" x 24"	3mm	430		
G1000/788	1000 x 788mm	4mm	45		
G1000/997	1000 x 997mm	4mm	45		
G1190/788	1190 x 788mm	4mm	45		
G1650/730	65"x 28¾"	4mm	45		
G1650/997	1650 x 997mm	4mm	45		
G1650/1122	1650 x 1122mm	4mm	45		
G1676/730	66" x 28¾"	4mm	45		

CODE	DESCRIPTION	PRICE
GLAMA	Glasshouse Maintenance Aid	

Bubble Film

Our polyethylene bubble film has been specifically designed with glasshouse insulation in mind. It is manufactured from 3-ply laminate of fully UV stabilised polyethylene films with the middle ply containing trapped air bubbles. This film can be fixed either inside or outside the greenhouse. It can help to reduce heating costs by as much as 45% by keeping warm air in and cold air out. As the temperature outside falls the many sealed air pockets retain the heat.



PRICE

Glazing Clip - 'W' Glazing Clip



CODE	PACK	PRICE
GLA112	100	

PACK PRICE GLA064 100

Glass Lifter - Single

Glass Lifter - Double





CODE	PRICE
GLA078	

CODE	PRICE
GLA077	

Alliplugs

CODE

BUB15

BUB24



CODE	DESCRIPTION	PRICE
AG	Alliplug	
	[PK500]	
166	Super Alliplug	
AGS	[PK500]	
AGE	Super Alliplug Extender [PK500]	

DESCRIPTION

Bubble Film 1.5m x 50m

Bubble Film 2.4m x 50m

Glass Cutter



CODE	PRICE
GLA113	

Silicone Sealant & Gun




CODE	PRICE
SEASS - Sealant	
SEASSG - Gun	

GLASSHOUSE HOOKS, WIRE & PULLEYS

Glasshouse Pulleys



3'Vent Retaining Wire c/w Ferrule



CODE	PRICE
WR3F	

/	
CODE	PRICE
GI A123	

Barrel Strainer

Wire Strainer



CODE	PRICE
GLA132 - No.2	
GLA133 - No.3	

CODE	PRICE
GLABAR06 - 6mm	
GLABAR08 - 8mm	

Chain

For supporting heating pipes, heaters, fans, crop wires etc.

CODE		WORKING LOAD	IDEAL FOR	LENGTH	PRICE/M
CHM14			Lightweight Duties	100m	
CHV22	2 mm	40 kg	\"		
CHV27	2.5 mm	70 kg	Victor Chain PVC Pipe, Fans, Heaters etc.	30m per	
CHV35	3.4 mm	140 kg		hank	
CHV50	4.6 mm	180 kg	eic.		

Bulldog Grips



Socket Driver

Extra deep sockets to reach nuts through which bolts protrude.



CODE	PRICE
CK433407 - 7mm	
CK433408 - 8mm	

Wire Rope

6x19 Galvanised Wire Rope.

GLABG03 - 3mm (7mm nuts) GLABG05 - 5mm (8mm nuts)

GLABG06 - 6mm (8mm nuts)

Also available on request 7x19 Stainless Steel Rope.



CODE	DIAMETER	COIL	PRICE
WR3	3 mm	100m	
WR4	4 mm	100m	
WR5	5 mm	100m	
WR6	6 mm	100m	

Galvanised Wire

For sprayline systems and crop support plus many other uses.



CODE	GAUGE	METRES/KG	COIL	PRICE
WG1025	10G (3.15mm)	14	25kg	
WG1205	12G (2.50mm)	20	5kg	
WG1225	12G (2.50mm)	20	25kg	
WG1225HT	12G Hi Tensile	20	25kg	

S-Hooks

All purpose bright galvanised.






CODE	SIZE	PRICE
GMSH25	3.0 x 25mm	
GMSH30	3.0 x 30mm	
GMSH35	4.0 x 35mm	
GMSH40	4.4 x 40mm	
GMSH45	5.0 x 45mm	

Vent/Screen Winch

Ideal for ventilation winching and up and down movement of heaters. Easy



CLEANING & SHADING

Hyperox[®] Disinfectant

Powerful Broad Spectrum Multipurpose Disinfectant

Hyperox® superior stabilised formulation provides greater application flexibility and broad spectrum activity with efficacy against viruses, bacteria, fungi and spores at low temperatures and in the face of organic challenge.

For surface and equipment disinfection, dilute 10ml Hyperox concentrate to 1L of water.



Jet 5° Disinfectant

A powerful disinfectant, recognised as a food grade sanitiser with organic status, containing peroxyacetic acid, for use in all areas of horticulture and agriculture for the disinfection of all surfaces inclusing glasshouses, tools, pots, trays, benches, equipment, paths, buildings, stores and irrigation systems.

Guide rate: 1 in 125 dilution but can vary if required.


CODE	DESCRIPTION	SIZE	PRICE
ZHYPR20L	Hyperox*	20L	
ZJET55L	Jet 5°	5L	

Omni-Glass

Horticultural Glass Cleaner

- **Maximises light efficiency**
- **User-friendly**
- Safer to the environment
- Virtually no odour

Omni-Glass provides these four key benefits over conventional Hydrofluoric based formulations.



Dilute 1L in between 5 and 20L of water depending on the dirtiness of glass.

CODE	DESCRIPTION	SIZE	PRICE
ZOMNI25L	Omni-Glass	25 L	



Horticultural Glass Cleaner

GS-4 is a glass cleaner suitable for glass greenhouses. GS-4 contains no hydrogen flouride gas and has virtually no vapour effect. This is why GS-4 is safer for humans and the environment.

Advantages:

- Removes dirt such as soot, dust and algae.
- Suitable for use on the inside and outside of glass greenhouses.
- Will not roughen the glass surface.
- Contains ammonium biflouride instead of hydrogen flouride gas.
- Has virtually no vapour action.
- Is therefore safer for humans and the environment.

Dilute 1L in between 5 and 20L of water depending on the dirtiness of glass.

CODE	DESCRIPTION	SIZE	PRICE
ZGS420L	GS4	20L	

ReduSo

Universal Shading Agent

ReduSol is a liquid shading agent for use in greenhouse horticulture that can be easily removed with ReduClean after the season.

Advantages:

- White even coating.
- Adjustable shading levels.
- Easy to apply.
- Highly resistant to wear.
- Diffuse light.
- Higher light transmission when wet.
- Easy to remove with ReduClean.
- Safe for humans and for the environment

CODE	DESCRIPTION	SIZE	PRICE
ZREDX20K	ReduSol	20kg	

ReduHeat[®]

Selective High-Tech Shading Agent

ReduHeat is a liquid shading agent that transmits a significant amount of growth light (PAR) and reflects radiation (NIR) to a large extent.

Advantages:

- Improved light/heat ratio.
- Diffuse light.
- Adjustable shading levels.
- Highly wear resistant.
- Easy to remove with ReduClean.



ReduFuse

Solution for Diffused Light

ReduFuse contains a special pigment with the extraordinary property of diffusing sunlight, while retaining a very high light transmission level. Redufuse IR has the added advantage of high reflection of heat radiation (infrared).



Advantages:

- More photosynthesis, even at the bottom of the plant
- Higher yield and better quality

CODE	DESCRIPTION	SIZE	PRICE
ZREDF15K	ReduFuse	15kg	
ZREDFIR15K	Redufuse IR	15kg	

ReduClea

For Removing ReduSol, ReduHeat & ReduFuse

ReduClean is developed for removing ReduSol or ReduHeat from glass, plastic film, polycarbonate or acrylate.

Advantages:

- High cleaning effect.
- Easy and economical in use.
- Safe for humans and the environment.

CODE	DESCRIPTION	SIZE	PRICE
ZREDC20L	ReduClean	20L	



DISINFECTANT & CLEANERS

Polytex Pro Concentrate ENVIRONMENTALLY FRIENDLY UPVC, POLYTUNNEL & PLASTIC SURFACE CLEANER

A unique high energy cleaning and decontaminating fluid. Polytex is an acid and biflouride free solution which gently removes green slime, soot, traffic film, grease, pesticide and chemical residues from upvc, polytunnels, plastic, conservatories and painted surfaces.

Polytex achieves maximum clarity and ensures maximum light transmission, essential for healthy and efficient plant growth.

Rates: Dilute Polytex 1:10 with water to create active solution, suitable for manual, machine or power hose application.

Coverage: 8-12m² per litre of diluted product.

Not to be used on glass surfaces. For glass see Verritex Pro.



CODE	DESCRIPTION	SIZE	PRICE
ZPOLY1L	Polytex Pro	1 L	
ZPOLY5L	Polytex Pro	5 L	

Hortisept Pro Concentrate HORTICULTURAL DISINFECTANT

Hortisept is a specifically formulated synergistic blend that is bactericidal, fungicidal and viricidal but mild and user and environmentally sensitive. Safer alternative to aggressive or corrosive chemicals. Hortisept disinfects continuously, preventatively and repeatedly.

Effective controls on a wide range of pathogens on hard surfaces. Its applica-

- Hard surfaces/exteriors
- Work areas and benches, pots ,trays, matting, plant and flower buckets.
- Disinfection of cutting tools
- Glasshouses and polytunnels

Rates: Dilute with water 1:25 to make active solution.

Coverage: 8-12m² per litre of diluted product.

For best results clean and remove all organic matter using Verritex or Polytex before disinfecting with Hortisept.



CODE	DESCRIPTION	SIZE	PRICE
ZHSPC1L	Hortisept Pro	1 L	£9.65
ZHSPC5L	Hortisept Pro	5 L	£35.00





Algiclear Pro Concentrate GREEN ALGAE REMOVER - SUPER CONCENTRATE

Algiclear is a concentrated, environmentally sensitive, curing and preventative treatment which kills algae, moss and liverwort on all hard surfaces.

Long term control of algae, moss, liverwort and lichens on any hard surface including: walkways/pots/benches/roofs/fences/decking/terraces/walls etc

Rates: Mix at a ratio 20:1 to make 101 litres of active solution, enough to cover approx 1,010m². Simply spray on and leave.

Coverage: 8-12m² per litre of diluted product.

Fully registered as a surface biocide under COPR and HSE 6835.

Does not change the colour of the surface, nor does it form a film and as such is UV stable (does not turn yellow). Does not affect slip characteristics of the walkway surface.



CODE	DESCRIPTION	SIZE	PRICE
ZALGI1L	Algiclear Pro	1 L	
ZALGI5L	Algiclear Pro	5 L	

Verritex Pro Concentrate GLASS & GREENHOUSE CLEANER

Verritex is an acid free, environmentally sensitive solution for the safe and efficient cleaning of all glass surfaces. Ideal for large areas of inaccessible glass such as: professional greenhouses, amenity buildings, high rise buildings, conservatories or simply your house or car windows.

Verritex easily removes:

- Algae
- Dirt
- Soot
- Sticky sap
- Grease
- Soils
- Pesticide & chemical residues

Verritex can be used in confined spaces as it does not give off fumes or odours during use, which makes it an ideal cleaner for the professional horticulturalist. Verritex achieves maximum 'sparkle' and ensures optimum light transmission, essential for healthy and efficient plant growth.

Unlike acids it does not etch or damage the glass surface instead it efficiently removes all soiling quickly and effectively. With a pH of 9.8 it will not damage sensitive surfaces such as aluminium or magnesium alloys.

Rates: Dilute with water 1:50 to make active solution.

Coverage: 8-12m² per litre of diluted product.



CODE	DESCRIPTION	SIZE	PRICE
ZVERR1L	Verritex Pro	1 L	
ZVERR5L	Verritex Pro	5 L	

XL TUNNEL COVERS

SunMaster Clear & Diffused

Use this film for:

All crops where colour, especially red and blue is important.

- Vegetables
- Flowers
- Over wintered nursery stock where only slight frost protection is required

Use this film for:

All crops where colour, especially reds and blues is important.

- Vegetables
- Flowers
- Soft fruit
- Over wintered nursery stock where only light frost protection is required



SPECIFICATIONS		
UV Guarantee	5 years	
Life expectancy	8+ years	
Polymer make up	m-LLDPE, PE, EVA	
Diffusion (400-700 nms)	25%	
Total UV (300-390 nms)	60%	
Thermicity	N/A	
Temperature reducing	No	
Anti drip	AF/AD yes	
Light transmission	~91%	
Appearance	Clear	
Puncture resistance	1000 gms	
Stretch before break	600%	

SPECIFICATIONS		
UV Guarantee	5 years	
Life expectancy	8+ years	
Polymer make up	m-LLDPE, PE, EVA	
Diffusion (400-700 nms)	60%	
Total UV (300-390 nms)	60%	
Thermicity	N/A	
Temperature reducing	Yes	
Anti mist/drip	AF/AD yes	
Light transmission	~89%	
Appearance	Milky white	
Puncture resistance	1000 gms	
Stretch before break	600%	

FILM WIDIR	/.3m	9.2111	11.1111	14111
per linear metre				
Prices quoted are for rolls 20m or more in length, call for prices less than 20m				

Sun Master Cool

Suitable for sheep, chickens, storage and shrubs.

SunMaster Cool has replaced Stockmaster White and has been designed for growing plants that like to be kept cool in the summer but still like lots of light. SunMaster Cool uses the latest microfine Aluminium diffuser which makes your tunnel ~25% cooler in bright sunlight than a clear film.

Useful also for animal houses and for storage.

SPECIFICATIONS		
UV Guarantee	6 years	
Life expectancy	~10 years	
Polymer make up	m-LLDPE, EVA	
Diffusion (400-700 nms)	50%	
Total UV (300-390 nms)	50%	
Thermicity	<17%	
Temperature reducing	Yes	
Anti drip	AF/AD yes	
Light transmission	~80%	
Appearance	Light Aluminium	
Puncture resistance	1200 gms	
Stretch before break	600%	

FILM WIDTH	8m	10m	12m	14m
per linear metre				
Prices quoted are for rolls 20m or more in length, call for prices less than 20m				

Carriage (standard): £10 per delivery - UK mainland only, excludes Scottish Highlands and Islands.

Sun Master SuperThermic

Use this film for:

All crops which will be heated. All crops where colour, especially reds and blues is important.

- Vegetables
- **Flowers**
- Soft fruit
- **Bedding plants**
- Over wintered nursery stock where frost protection is required



SPECIFICATIONS				
UV Guarantee	5 years			
Life expectancy	8+ years			
Polymer make up	m-LLDPE, EVA			
Diffusion (400-700 nms)	45%			
Total UV (300-390 nms)	>60%			
Thermicity	<8%			
Temperature reducing	Yes			
Anti mist/drip	AF/AD yes			
Light transmission	~89%			
Appearance	Clear			
Puncture resistance	1200 gms			
Stretch before break	600%			

SteriLite SuperThermic

Use this film for:

All crops which are to be heated.

- Where the advantages of the UV blocking IPM will be of an advantage i.e. organic growing
- Vegetables
- **Flowers**
- Fruit
- **Bedding plants**
- Over wintered nursery stock where frost protection is required



SPECIFICATIONS				
UV Guarantee	5 years			
Life expectancy	8+ years			
Polymer make up	m-LLDPE, EVA			
Diffusion (400-700 nms)	45%			
Total UV (300-390 nms)	>1%			
Thermicity	<8%			
Temperature reducing	Yes			
Anti mist/drip	AF/AD yes			
Light transmission	~89%			
Appearance	Clear			
Puncture resistance	1200 gms			
Stretch before break	600%			

2 2 4						
FILM WIDTH	7.3m	9.2m	11.1m	14m		
per linear metre						
Prices quoted are for rolls 20m or more in length, call for prices less than 20m						

Side Vent Film





AND RESERVED TO SERVED THE RESERVED THE RESERVED THE RESERVED TO SERVED THE RESERVED TH		SHOW THE PERSON NAMED IN COLUMN TWO					
FILM WIDTH	2m	2m Pocketed	3m				
per linear metre							
Minimum length is 30m. SVF is SunMaster specification							

Tunnel Accessories

CODE	DESCRIPTION	IMAGE	PRICE
TAHS20	19mm x 20m Anti-Hotspot Tape		
TAHS30	30mm x 20m Anti-Hotspot Tape	1	
TAHS50	50mm x 20m Anti-Hotspot Tape		
TAHSRT	50mm x 50m Anti-Hotspot Repair Tape		
RT050	50mm x 25m Tunnel Repair Tape		
RT075	75mm x 25m Tunnel Repair Tape		
RT100	100mm x 25m Tunnel Repair Tape		
RT150	150mm x 25m Tunnel Repair Tape		
RT300	300mm x 25m Tunnel Repair Tape		

VISQUEEN TUNNEL COVERS





Lumisol "Clear" 5S 180mu

Clear film incorporating UV "Transparent" characteristic. Transmits a high % of UV light which can assist the Colour, Flavour & Fragrance in a wide range of flowers & fruit crops.

Light Transmission $\geq 91\%$ Thermicity $\geq 80\%$ Diffusion $\geq 35\%$

FILM WIDTH	7.3m	9.2m	11.1m	14m
per linear metre				

White UVI 5S 180mu

Cover with shade producing properties for use growing nursery stock. 5 season life.

Light Transmission 60-70% Thermicity > 55% Diffusion > 85%

FILM WIDTH	9.2m	11.1m	12.5m	15m
per linear metre				

Minimum cut length is 10 metres. There is an additional £10 per roll "Set-up" charge for rolls of 15m or

Carriage (standard): £48 per delivery for orders less than £1,000+VAT (free of charge over £1K) - UK mainland only, excludes Scottish Highlands and Islands.

Lumisol "Diffused" 5S 180mu

Very high diffusing cover incorporating UV "Transparent" characteristic. Transmits a high % of UV light which can assist the Colour, Flavour & Fragrance in a wide range of flowers & fruit crops.

Light Transmission ≥ 88% Thermicity > 80% Diffusion > 90%

FILM WIDTH	7.3m	9.2m	11.1m	14m
per linear metre				

Green / White 5S 180mu

Complete opacity cover formulated for Mushroom growers. 5 season life.

Light Transmission < 2% Thermicity > 55% Reflectivity > 75%

FILM WIDTH	14m
per linear metre	



POLYTHENE FILMS

Clear Polythene

Low cost horticultural covering. General purpose - use on capillary beds, for partitioning and dust protection etc.



CODE	GAUGE/μM	WIDTH	LENGTH	PRICE
POLZC021010		1.00m	100m	
POLZC021210		1.20m	100m	
POLZC021510		1.50m	100m	
POLZC022010	80 / 20	2.00m	100m	
POLZC022510	80 / 20	2.50m	100m	
POLZC023010		3.00m	100m	
POLZC023210		3.20m	100m	
POLZC023610		3.60m	100m	
POLZC033010	120/30	3.00m	100m	
POLZC034010	120/30	4.00m	100m	
POLZC051010		1.00m	100m	
POLZC051210		1.20m	100m	
POLZC051510		1.50m	100m	
POLZC052010	200 / 50	2.00m	100m	
POLZC052510		2.50m	100m	
POLZC053010		3.00m	100m	
POLZC053510		3.50m	100m	

Propagation Film Milky White

For covering cuttings and also soil covering - light reflective.

CODE	GAUGE/μM	WIDTH	LENGTH	PRICE
POLZM023610	80 / 20	3.60m	100m	
POLZM023630	80 / 20	3.60m	300m	
POLZM034010	120/30	4.00m	100m	

Black Polythene

For soil covering and mulching etc. Provides excellent weed control and keeps soil moist.

CODE	GAUGE/μM	WIDTH	LENGTH	PRICE
POLZB051510	200 / 50	1.50m	100m	
POLZB052010		2.00m	100m	
POLZB053010		3.00m	100m	
POLZB054010		4.00m	100m	

Micro-Perforated Polythene

CODE	GAUGE/μM	WIDTH	LENGTH	PRICE
BLACK: For covering algae growth.	capillary matti	ng to help sto	p drying out a	and suppress
POLZBP031210		1.20m	100m	
POLZBP031225	120/30	1.20m	250m	
POLZBP031510		1.50m	100m	
POLZBP031525		1.50m	250m	
POLZBP032010		2.00m	100m	
POLZBP032125		2.10m	250m	
WHITE: Same advant	ages as the bla	ick, but with li	ght reflective	properties.
POLZWP031525	120 / 20	1.50m	250m	
POLZWP032150	120/30	2.10m	500m	

Micro-Perforated Symbol Sheet

Four different spacing systems, each with its own symbol to permit easy and accurate spacing of pots.

Dot - 124mm C2C - Pots 74.7m² Circle - 142mm C2C - Pots 57.7m² Triangle - 166mm C2C - Pots 42.9m² Square - 199mm C2C - Pots 30.2m²



CODE	GAUGE/μM	ROLL WIDTH	ROLL LENGTH	PRICE
POLSYM200300	160 / 40	2.00m	300m	

Black/White & Dense White Floor Polythene

For use as glasshouse floor covering in rockwool growing and as nutrient channel for NFT systems.



CODE	GAUGE/μM	ROLL WIDTH	ROLL LENGTH	PRICE
POL	various	var	ious	

Perflex Polythene

White floor polythene is used to protect winter crops of indoor lettuce from disease and improve yield from increased light reflection.



Blue or Black Perflex also available on request.

CODE	GAUGE/μM	ROLL WIDTH	ROLL LENGTH	PRICE
POLPW7148400	140/35	1.48m	400m	

Anti-condensate Energy Screens (50µM)

A specialist and seasonal film for energy saving with anti-fog properties, especially in salad crops. Available perforated or un-perforated.

Standard widths : 1.75m; 2.00m; 2.5<mark>0m; 3.30m; 3.50m; 4.25m;</mark>

: 4.80m; 5.30m; 6.8<mark>0m</mark> : hole diameter 6mm

Perforations : hole diameter 6mm : 10x10; 10x20; 20x20; 20x40; 40x40

: other perforation patterns available

: pre-cut sheets at length of greenhouse available

CODE	GAUGE/μM	ROLL WIDTH	ROLL LENGTH	PRICE / m²
POLAC50	200 / 50	var	ious	

CO₂ Layflat Tubing (85μM)

Used to distribute CO2 around the greenhouse. Increased CO2 levels in your greenhouse will help increase both the size and weight of fruit as well as increasing uniformity of ripening in crops such as tomatoes.

Also available to order with "hanging" holes for suspension.

CODE	DIAMETER	SPACING	LENGTH	PRICE
POLCL658020	65mm	20cm	500m	
POLCL658030	65mm	30cm	500m	
POLCL658000	65mm	BLIND	500m	
POLCL948020	94mm	20cm	500m	
POLCL948030	94mm	30cm	500m	
POLCL948000	94mm	BLIND	500m	

GROUNDCOVER & CAPILLARY MATTING

Permatex Blue Grid Premium Groundcover 100gsm

Features:

- **Exceptional** weed suppression without spraying
- **Excellent water permeability** maintains moisture levels without puddling
- Easy installation and maintenance
- Puncture and tear resistant can handle machine and pedestrian traffic
- **UV** stabilised
- Can last over 40 years when covered with a mulch



CODE	WIDTH	LENGTH	PRICE
GCP100100	1.00m	100m	
GCP200100	2.00m	100m	
GCP330100F	3.30m	100m	
GCP420100F	4.20m	100m	
GCP515100F	5.15m	100m	

Ground Cloud is a new Capillary Matting that provides water retention, great durability and superb value, engineered for modern growing!



Raining value

- Reducing frequency of irrigation
- Reducing groundwater contamination by controlling run
- Uniform fibre layer provides an even distribution of water, encouraging:
 - Uniform crops
 - Development of healthy root systems

Specifications:

- Proven to hold 2.5 litres/m² helping to provide leading water retention
- Weight: 275g/m²
- Thickness: 4.0mm (+/- 0.5mm)
- Polypropylene layer provides durability and strength (suitable for outdoor and indoor use)
- Compatible with overhead, seep and trickle hose watering systems

Any width up to 4.3m on request.

CODE	WIDTH	LENGTH	PRICE
CAPM040	0.40m	50m	
CAPM050	0.50m	50m	
CAPM060	0.60m	50m	
CAPM070	0.70m	50m	
CAPM100	1.00m	50m	
CAPM120	1.20m	50m	
CAPM140	1.40m	50m	

Permatex Permium White Groundcover 100gsm

The ideal choice for growers of Strawberries, Tomatoes, Peppers and Cucumbers.

White Groundcover is a 100g/ m² groundcover, designed to maximise light reflection for the early ripening of fruit and salad crops in glasshouse and polytunnel production.

Ask us about bespoke sizes...

Specification:

- Woven polypropylene
- 100g/m²



CODE	WIDTH	LENGTH	PRICE
GCP330100W	3.30m	100m	
GCP515100W	5.15m	100m	

Groundcover Accessories

CODE		DESCRIPTION	PRICE
GCEP	1	Groundcover Economy Peg Used in securing fleece and ground cover materials.	
GCT		Sealing Tape 19mm 45m, for joining ground-cover rolls together and securing to the surface.	
GCS		Staples Strong and durable metal staple for securing groundcover. Unique flat surface prevents tripping.	

Landscape Mulch Fabric

Made from a black spunbonded polypropylene, with high levels of UV stabiliser, it acts as a barrier between soil and top mulch, preventing soil migration and

providing a clean, attractive surface. Used in planting schemes and enables easy planting, by pre-cutting crossholes in the fabric, in golf bunkers and under play areas, paths and patios. Helps suppress weed growth.

- Landscaping
- Weed control
- Planting out
- **Beds**
- Tubs
- Hanging baskets



CODE	WIDTH	LENGTH	PRICE
TILM10100	1.00m	100m	
TILM15100	1.50m	100m	
TILM20100	2.00m	100m	
TILM30100	3.00m	100m	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

WINDBREAK & EXTRUDED PLASTIC



Windbreak: Loktex

8-10 year life - high UV content

Loktex netting incorporates flat tape threads and double lock-stitch tearproof technology with button holes top and bottom. It is the ultimate knitted wind-proof product, dramatically reducing wind impact speeds to protect crops from wind, water loss, soil erosion, windborne diseases and heat loss.

Available in Green or Black.

100m coils also available on request.





CODE	COLOUR	SIZE	DENSITY	PRICE
TILW4183050G	GREEN	1.83 x 50m	LOKTEX	
TILW4366050G	GREEN	3.66 x 50m	47%	
CODE	COLOUR	SIZE	DENSITY	PRICE
TILW5091050G	GREEN	0.914 x 50m		
TILW5122050G	GREEN	1.22 x 50m	LOKTEX	
TILW5183050G	GREEN	1.83 x 50m	55%	
TILW5366050G	GREEN	3.66 x 50m		
CODE	COLOUR	SIZE	DENSITY	PRICE
CODE TILW6091050G	COLOUR GREEN	SIZE 0.914 x 50m	DENSITY	PRICE
			DENSITY LOKTEX	PRICE
TILW6091050G	GREEN	0.914 x 50m		PRICE
TILW6091050G TILW6122050G	GREEN GREEN	0.914 x 50m 1.22 x 50m	LOKTEX	PRICE
TILW6091050G TILW6122050G TILW6183050G	GREEN GREEN GREEN	0.914 x 50m 1.22 x 50m 1.83 x 50m	LOKTEX	PRICE
TILW6091050G TILW6122050G TILW6183050G TILW6366050G	GREEN GREEN GREEN GREEN	0.914 x 50m 1.22 x 50m 1.83 x 50m 3.66 x 50m	LOKTEX 63%	

Monofilament Windbreak [6-8 year]

Monofilament windbreak system is tough and extremely durable. It is designed to reduce windspeed and is finished in an attractive country green with eyelets top and bottom.








CODE	COLOUR	SIZE	*45%	*50%
TILWM*100050	GREEN	1.00 x 50m		
TILWM*150050	GREEN	1.50 x 50m		
TILWM*200050	GREEN	2.00 x 50m		
TILWM*300050	GREEN	3.00 x 50m		

Heavy Duty Extruded Windbreak

Heavy Duty - Mesh 15mm x 5mm. This windbreak is specifically designed to reduce windspeed by 55% as well as protecting crops from water loss, soil erosion and wind damage.



CODE	COLOUR	SIZE	MESH	PRICE
TILGREXT20	BLACK	1.0 x 30m	15 x 5mm	
TILGREXT21	BLACK	2.0 x 30m	15 X 5mm	
TILGREXT22	GREEN	1.0 x 30m	155	
TILGREXT23	GREEN	2.0 x 30m	15 x 5mm	

CROP PROTECTION FLEECE & NETTING

Fleece

Crop Covering for Commercial Horticulture.

- Excellent durability, strength and tear resistance
- A flexible crop covering resistant to high winds
- Protection climate barrier for all horticultural crops
- Excellent water permeability, limiting water retention held in cross section of the fleece, thereby minimising any damage to the crop below
- Optimum protection against pests
- Balanced temperature and humidity distribution



CODE	DENSITY	ROLL WIDTH	ROLL LENGTH	PRICE
FLS18020100	18g	2.0m	100m	
FLS18040250	18g	4.0m	250m	

Insect Net

This lightweight polyethylene UV inhibited netting screens out insects, preventing damage to crops and the spread of bacterial diseases. Colour is white.


- **Tunnel and shade houses**
- Fruit and crop protection



CODE	WIDTH	LENGTH	MESH	PRICE
TILIN1620001	2.00m	100m	1.3x1.3mm	
TILIN1636601	3.66m	100m	1.3x1.3mm	
TILIN5020001	2.00m	100m	0.8x0.3mm	

Black Extruded Mesh

- Protects plants and crops from butterflies with its extra small mesh size
- Lightweight yet very strong and durable
- Often used in conjunction with fruit cages
- 44 asm
- Colour is Black



CODE	SIZE	MESH	PRICE
TILGREXT11	2.0 x 150m	6 x 7 mm	
TILGREXT12	4.0 x 150m	6 x 7 mm	

Standard Anti-Bird Tape Net [PN3]

5 year life 17x17mm mesh Dark Green



Premium Anti-Bird Net [PN2]

10 year life

This superior quality 20mm mesh with double stitch mono-thread is suitable for installation on a frame to keep out birds and rodents.



CODE	COLOUR	TYPE	SIZE	MESH	PRICE
TILPN302100	GREEN	PN3	2.0 x 100m	17mm	
TILPN304100	GREEN	PN3	4.0 x 100m	17mm	
TILPN306100	GREEN	PN3	6.0 x 100m	17mm	
TILPN308100	GREEN	PN3	8.0 x 100m	17mm	
TILPN310100	GREEN	PN3	10.0 x 100m	17mm	
TILPN202100	BLACK	PN2	2.0 x 100m	20mm	
TILPN204100	BLACK	PN2	4.0 x 100m	20mm	
TILPN206100	BLACK	PN2	6.0 x 100m	20mm	
TILPN208100	BLACK	PN2	8.0 x 100m	20mm	
TILPN212050	BLACK	PN2	12.0 x 50m	20mm	

Black Extruded Mesh

8-10 year life expectancy

This black oriented netting is lightweight yet very strong and durable, with UV additive to prolong the nets life. It has many applications including fruit cage net, poultry and pheasant enclosures and general anti bird stop netting



CODE	COLOUR	SIZE	MESH	PRICE
TILGREXT01	BLACK	2.0 x 200m	18x18mm	

Black Anti-Bird Net

5-7 year life expectancy

Tough and durable square mesh, extruded protection net. Suitable for frame applications, protecting crops from birds and other predators.

- Fruit protection
- Pheasant pens
- Pond covers



CODE	COLOUR	SIZE	MESH	PRICE
TILEXT1005	BLACK	2.0 x 100m	20x17mm	

ERMAF HEATERS

Ermaf P Range of Oil Fired Hot Air Blowers and/or CO₂ Generators

Direct oil-fired heaters with high efficiency burner and 'low noise' fan - ideal for CO₂ generation in glasshouses and for heating poultry houses.

Fuelled by kerosene (28 sec) but can be adapted to Gasoil (35 sec). Airpot essential to remove air from the fuel line. Completely safe operation by way of automatic burner, ignition and photocell flame control unit. Single or three phase models available, 24v switching for computer or room thermostat.





Can be adapted to a mobile unit with 160 Litre fuel tank as displayed here.

The Oil Burner Controller Unit mounted directly onto all ERMAF P. GP and RGA Series.

The silver control panel gives a lot of information about informs the user about the flame stability. The LED's inform the user about external and internal failures



CODE	MODEL	ОИТРИТ	AIR OUTPUT	SUSPENDED UNIT	MOBILE UNIT
ERMP040	P 40	136K Bthu (40kW)	6,200m³/hr		
ERMP060	P 60	205K Bthu (60kW)	6,200m³/hr		
ERMP080	P 80	273K Bthu (80kW)	7,700m³/hr		
ERMP100	P 100	341K Bthu (100kW)	7,700m³/hr		
ERMP120	P 120	409K Bthu (120kW)	7,700m³/hr		
ERMAP		Air Pot Air Eliminator			

Ermaf GP Range Gas Fired Hot-Air Blower

- Heating of greenhouses
- Enriching the CO₂ content
- A combination of heating and enrichment

The Ermaf hot-air blowers have proved themselves internationally for more than four decades. The heaters feature a Burner Control Unit (BCU) which makes them easy to operate. The GP can, in combination with a thermostat and the extra functions in the BCU such as alarm in case of failure and external reset, operate fully automatically.

Due to the substantial air over-measure and effective mixing of gas/air, this appliance provides properly regulated heating.

Ermaf GP heaters operate on natural gas or propane and allow easy adjustment. A long life is ensured by the stainless steel design. A constant temperature is guaranteed by the fully automatic operation, which is combined with a temperature-regulated thermostat.



CODE	MODEL	OUTPUT	AIR OUTPUT	PRICE
ERMGP095	GP 95	323K Bthu (95kW)	6,500m³/hr	
ERMGP120	GP 120	409K Bthu (120kW)	7,500m³/hr	

THERMOSTATS

DANFOSS RT4

Switching range: -5° to 30°C with max. temperature sensor 75°C.

Ambient temp.: -50 to 70°C Diff./Max. range: 1.2 to 4°C Diff./Min. range: 1.5 to 7°C

Highly accurate thermostat complete with room sensor.



MULTIFAN T15-WD 230V

Switching range: 0° to 40°C with max. temperature sensor 50°C. Mains current (Max.) 16 Amp Max. load 120 VA IP55 housing WxHxD (100 x 155 x 65mm)

Economically priced and versatile thermostat with room sensor.

NOTE: Not to be situated in direct air flow tem

ELEST09

m either fan or heater, or near nperature fluctuations at the s		 4
CODE	MODEL	PRIC
ELEST04	Danfoss RT4	

Multifan T15-WD



PERICOLI HEATERS

Pericoli combiTERM Suspended Air Heaters

CombitERM represents the core of a programme of heaters which, in full **Pericoli** tradition, encloses the result of a continuous development aiming at an ever increasing efficiency and performance still being prepared for an intensive use.

The typically orange-colour pre-painted wallhousing of the **combiTERM** is made in galvanised steel. It is rust-proof and particularly suitable to performances under heavy duty circumstances, such as use in tunnel-type greenhouses and agricultural applications.

The burner, available in both light oil or gas version, is situated on front of the heater permitting easy service.

The **combiTERM** is supplied with a round hot air outlet preset for the installation of a polythene duct.

The combustion chamber is made in stainless steel AISI 430. The heat exchanger, equipped with wide cover plates for a complete cleaning, has been designed especially to increase the **combiTERM** thermal efficiency.

The flue gas outlet is situated horizontally on the rear side of the heater, in order to avoid infiltration of rain water and condensation from the chimney into the heat exchanger.

CombiTERM/E with an axial fan blower is particularly economical and compactshaped. **combiTERM/C** with a centrifugal fan for situations where a high static pressure and a particularly low noise level is required.



	PER	ICOLI
SUMPTION	DIMENSIONS (LxWxH)	PRICE
kg/hr	1183 x 512 x 764mm	

CODE	MODEL	OUTPUT	YIELD	AIR OUTPUT	OIL CONSUMPTION	DIMENSIONS (LxWxH)	PRICE
PERCT035E	combiTERM 35/E Axial Fan	35.6kW	90.2%	2,800m³/hr	3.0 kg/hr	1183 x 512 x 764mm	
PERCT060E	combiTERM 60/E Axial Fan	60.5kW	90.3%	3,500m³/hr	5.1 kg/hr	1,393 x 572 x 916mm	£POA
PERCT100E	combiTERM 100/E Axial Fan	96.2kW	91.5%	5,600m³/hr	8.1 kg/hr	1,616 x 672 x 1,046mm	Various combinations
PERCT140E	combiTERM 140/E Axial Fan	144.8kW	90.2%	10,300m³/hr	12.2 kg/hr	1,840 x 760 x 1,136mm	and setups
PERCT190E	combiTERM 190/E Axial Fan	193.5kW	90.1%	11,500m³/hr	16.3 kg/hr	1,960 x 862 x 1,290mm	available on request
PERCT240C	combiTERM 240/C Centrifugal	239.8kW	90.0%	18,500m³/hr	20.2 kg/hr	2,444 x 992 x 1,362mm	request

BENSON Hot Air Cabinet Heaters

Benson warm air heaters have been specifically designed to provide effective low cost heating for a wide variety of industrial, commercial and horticultural premises including: factories, workshops, warehouses, greenhouses etc.

- Fast warm up
- · Comfortable environment
- Automatic operation
- Extended guarantees
- Simple installation
- Compact design

VERTICAL

Forced draught oil & gas fired (outputs 29 - 381kW) Atmospheric gas fired (outputs 29 - 104kW)

REVERSE FLOW

Forced draught oil & gas fired (outputs 58 - 381kW)

All model types available as free blowing (c/w nozzle heads) or ducted (c/w duct spigot) version.

HORIZONTAL

Forced draught oil & gas fired (outputs 58 - 381kW)



Air Heater Flues

Suitable for all oil and gas fired commercial and industrial warm air heaters.

Please call for exclusive prices.

Single wall stainless steel:

- Pipe Lengths
- Elbows
- Tees
- Caps
- Weather Caps
- Cowls



SULFUME & FANS

Mistraal Air Circulation Fans

- · Help to prevent botrytis and mildew
- · Improve heat distribution and carbon dioxide take-up
- · Reduce condensation
- Remove temperature gradients

AIR CIRCULATION

Air circulation is one of the most important factors within the greenhouse for controlled growing. Efficiency, top quality and reliable units are a must, therefore a Hotbox Mistraal Fan is a must.

Manufactured from robust stainless steel, there are three Mistraal fans to choose from. With sealed 'oiled for life' motors to IP34, they are designed for maintenance free, continuous running.

- Mistraal 5 suitable for areas up to 100m²
- Mistraal 10 suitable for areas up to 200m²
- Mistraal 24 suitable for areas up to 500m²



CODE	MODEL	V	RPM	OUTPUT	PRICE
HHFM05	Mistraal 5	220/240	1,275	900m³/hr	
HHFM10	Mistraal 10	220/240	1,300	1,600m³/hr	
HHFM24	Mistraal 24	220/240	1400	4,000m³/hr	

Cylindrical Air Circulation Fans (ACF)

- Air circulation in greenhouses
- Reduction of condensate on plants
- Better heat distribution in greenhouses

FANS FOR HORTICULTURE

As a result of energy-saving measures today's horticultural greenhouses are becoming increasingly airtight giving rise to the need for air circulation fans.

Body and safety grills in galvanised steel for maximum corrosion resitance. Propeller with 3 blades in aluminium alloy "Peraluman". Produced with highly resistant materials, it has been designed in order to ensure high energy efficiency and excellent versatility. Four practical eyelets for easy suspension.

ACF ensure low noise levels to grant productive labour conditions for your workers.

FAN SIZE

CODE

PERACF21

Sulfume

The Only Sulphur Vapouriser with the Unique Temperature Regulation System.

The Sulfume sulphur vapouriser helps to protect crops from fungal diseases such as mildew, botrytis and black spot. It also inhibits the spread of greenhouse pests.

- Unique temperature control cannot overheat the sulphur to create damaging oxides, releases ONLY pure sulphur
- Regulated element makes combustion impossible, eliminates the risk of fire and makes the Sulfume the safest on the market
- Energy efficient the lowest energy consuming sulphur evaporator available
- Flexible voltage can work on any supply from 110V to 250V, with no loss of performance in low voltage areas
- Manufactured in high quality materials to ensure durability
- Ideal for roses, strawberries, begonias, saint paulia, tomatoes, peppers and gerbera

COVERAGE

By using a uniform shaped cup, positioned accurately within the centre of the Sulfume cylinder, distribution is ensured through the natural funnel effect. One Sulfume is capable of treating between 100 - 1,000m². Up to 100 Sulfumes may be needed per hectare depending on the crop and severity of fungal problems.

Size: 13cm diameter, 18cm high

CODE	DESCRIPTION	PRICE
HHVS6	Sulfume Vapouriser (in boxes of 6)	
HHVS2K	Sulfume Vapouriser (incl. 2kg Sulphur)	
HHBS020	Burning Sulphur 2kg	
HHBS100	Burning Sulphur 10kg	

Superb Fan Heater 2.7kW

The HotBox Superb is a 2.7kW electronic Fan Heater. With Winter and Summer settings, it can help to keep your glasshouse cool or warm depending on the season.

- Half and full heat settings ensures maximum fuel economy
- Fan only setting use purely for air circulation
- Fitted with feet and hanging loops easy to install

DESCRIPTION

- High output fan (250cfm, 450m³/hr)
- Remote temperature sensor ensures accurate control
- Stainless steel construction with sealed elements built to withstand challenging, humid conditions

	CODE	DESCRIPTION	HEATS/FP	Dia. X L	PRICE
	HHFH28	Superb 2.7 kW 230v 12a	20m ² /30m ²	27 x 50 cm	
RANGE PRICE					
					St. No.

RPM

OUTPUT

HEATING

Thermabed

Bench Heating System

Thermabed is a water-based system for root zone heating. Made to measure and designed to encourage germination and propagation, Thermabed is ideal for areas of 50m² or larger.

- **Optimum growing** temperature - precise thermostatic control from 6 to 38°C
- Quick and easy to install on the ground or on benches
- Energy efficient inexpensive to run on gas, oil, solid fuel or bio fuel
- Durable construction reliability built-in
- Simple deisgn low maintenance costs

The Thermabed system consists of moulded expanded polystyrene panels which fit together to form the required area. These panels have a channel which forms a continous loop into which a flexible water pipe is fitted. The unique design is arranged so that the water inlet pipe and the water outlet pipe run side by side, thus providing a uniform temperature over the entire surface.

The Thermabed system comes complete with polystyrene panels, flexible piping, inter connectors and BSP valves. The system is made to measure and panels will be cut in-house to the width required. The system can be covered with a variety of materials depending upon the crop to be grown.

under 50m²	under 250m²	250m² - 999m²	over 1000m²

Thermabed Accessories

CODE	DESCRIPTION	PRICE
ННТВС	Solar Pipe Connectors	
HHTBCON	Pipe to ¾"BSP(M) Connectors	
ННТВЕ	Foil for Thermabed	

Propagator

Accurate and uniform root zone heating for up to 12 standard seed trays

This Propagator delivers accurate, uniform heat to the base of the seed trays, to promote the germination of seeds or root cuttings.



- Simple installation plug in and plant up
- Energy efficient inexpensive to run, no need to heat the whole green-
- Optimum growing temperature precise thermostatic control from 6 to
- Durable construction reliability built-in
- Space saving design overall dimensions length 1.5m, width 0.75m

The propagators aluminium base which encloses the heating element ensures that seedtrays receive accurate and uniform heat for propagation. The thermostat sensor is placed into the growing medium to obtain the correct temperature for maximum germination and rooting rates. The polycarbonate top (which is assembled on site) will protect the young plants and provide a mini climate several degrees higher than the surrounding temperatures in the greenhouse. Therefore there may not be any need for additional background heating in the greenhouse.

CODE	DESCRIPTION	PRICE
НННР	Propagator	

Heatwave Panels

Accurate and Uniform root zone Bench **Heating System**

YOU CHOOSE...

The length, the width, the wattage and the voltage.

Phone or email your bench size quotation by return.

The Heatwave is a made-to-measure bench heating system which encourages germination, propagation and growth of seedlings and cuttings by delivering constant, uniform heat to the base of seed trays and plant pots.



Optimum growing temperature - precise thermostatic control from 6 to 38°C

Easy to install - on the ground or on benches, just plug in and plant up

Energy efficient - inexpensive to run

Durable construction - reliability built-in

Flexibility - operate more than one Heatwave from a single thermostat

INSTALLATION IS SIMPLE

The system is simple to install and requires no specialist knowledge, just an electrical socket.

PRICING A HEATWAVE PANEL

Heatwave panels are priced individually, so please price each panel separately. Heatwave panels can be made in unusual shapes, such as 'U' and 'L' shapes for which prices available on request.

NOTE: please make sure that the internal measurement is measured, especially with benches.

Technical Specification

- Size and voltage: built to your specification no cold spots, no waste
- Installation: lay on 50mm thick polystyrene base, capillary matting
- Power: fitted with compliant plug
- Construction: aluminium foil base, with PTFE elements

2m² - 2.99m²	3m² - 4.99m²	5m² - 9.99m²	10m² +

Heatwave Accessories

CODE	DESCRIPTION	PRICE
HHHWTS	Thermostat (Standard)	
HHHWTE	Thermostat (Electric)	
HHHWPC	Heatwave Extra Cable	
HHHWPS	Heatwave Switch	

Danish Trolley Heatwave - shelf heating system

- Designed to fit Danish Trolley shelves use trolleys for germination and propagation
- **Ultimate flexibility** control temperature of Heatwaves individually or by using just one, global control

CODE	DESCRIPTION	PRICE
HHHWDT	Danish Trolley Heatwave (with thermostat)	
HHHWDTA	Additional Danish Trolley Heatwave on same thermostat	

HORTICULTURAL PRODUCTION ACCESSORIES

Stick-in Plant Labels

Rigid, pointed heavy duty polystyrene label. A matt writing surface makes them ideal for use with indelible marking pens.

Box of 1,000

Standard colour: White

Special colours: Black, Blue, Green, Grey, Orange, Red, Pink, Purple & Yellow

CODE	LENGTH	WRITING AREA	WHITE	COLOURS
LABP10x	10cm (4")	10 x 1.4cm		
LABP12x	12cm (5")	12.5 x 1.4cm		
LABP15x	15cm (6")	15 x 1.7cm		

Staedtler Marker Pens

Black

CODE	DESCRIPTION	PRICE
SUN052F	Fine "Staedtler" Pen - Black	
SUN052M	Medium "Staedtler" Pen - Black	

'T' Bed Labels

A range of bed labels made from UV protected recycled polypropylene with panels to provide a large surface area to write on.

Colours: Black, Blue, Green, Grey, Orange, Red, Pink, Purple & Yellow



CODE	TYPE	LENGTH	HEAD SIZE	PACK	PRICE
LABT15x	SL135	15cm	5.5 x 3.5cm	500	
LABT20x	SL200	20cm	8 x 5cm	100	
LABT24x	SL250	24cm	10 x 6cm	100	
LABT30x	SL300	30cm	8 x 5cm	100	


Soft Buckle Tree Ties

Made from soft black PVC strapping which is capable of stretching with growth, is also easily adjusted and comes complete with hoop collar spacer to prevent chaffing between tree and stake.



CODE	DESCRIPTION	PACK	PRICE
TTSB15B	Buckle Tree Tie 40cm x 25mm (BT40)	100	
TTSB18B	Buckle Tree Tie 45cm x 25mm (BT45)	100	
TTSB24B	Buckle Tree Tie 60cm x 25mm (BT60)	100	

Cane Caps



CODE	ТҮРЕ	CASE QTY	PRICE
PKCC1	Standard	1,000	
PKCC2	Economy - for thin canes	1,000	
PKCC3	For Split canes/Flower sticks	1,000	
PKCC4	Fits all canes	1,000	
PKCC5	Large - for thick canes	1,000	
PKCC6	PYR1 - Pyramid cap for 3 canes	1,000	

Loop Lock Labels

Designed for labelling and colour coding roses, shrubs, trees and hanging baskets.

1,000

Quantity:



CODE	LENGTH	WRITING AREA	COLOUR	PRICE
LABL16WH	16cm	11 x 1.6cm	White	
LABL16YE	16cm	11 x 1.6cm	Yellow	
LABL16GR	16cm	11 x 1.6cm	Green	
LABL16BL	16cm	11 x 1.6cm	Blue	
LABL16OR	16cm	11 x 1.6cm	Orange	
LABL16RE	16cm	11 x 1.6cm	Red	
LABL16PI	16cm	11 x 1.6cm	Pink	
LABL22WH	22cm	15 x 2.5cm	White	
LABL22YE	22cm	15 x 2.5cm	Yellow	
LABL22GR	22cm	15 x 2.5cm	Green	

Angled Head Bed Labels

A range of coloured angled head bed labels with panels to provide large surface area to write on. Ideal for colour coding plant varieties, pot sizes and promotions.

Colours: Black, Blue, Green, Grey, Orange, Red, Pink, Purple & Yellow. BB version has Blackboard.




	CODE	TYPE	LENGTH	HEAD SIZE	PACK	PRICE
	LABA27WH	SL275	27cm	13 x 8cm	50	
d	LABA38WH	SL400	38cm	10 x 6cm	50	
	LABA44WH	SL440	44cm	12.5 x 8cm	50	
ĺ	LABA44BB	SL440BB	44cm	12.5 x 8cm	50	
	LABA53WH	SL500	53cm	16 x 10cm	25	

Repair Tapes

CODE	DESCRIPTION	IMAGE	PRICE
RT050	50mm x 25m Tunnel Repair Tape		
RT075	75mm x 25m Tunnel Repair Tape		
RT100	100mm x 25m Tunnel Repair Tape		
RT150	150mm x 25m Tunnel Repair Tape		
RT300	300mm x 25m Tunnel Repair Taope		

Silver Cloth Tape 50mm

Heavy duty tape suitable for use in low temperatures. Ideal for repairs to hoses and waterproof clothing.



DESCRIPTION	PRICE
Silver Cloth Tape 50mm	

MECHANICAL TYING & TAPES

Max Tapener HT-R Gun (HTR)

HTR Max gun - The improved successor to the HTB tying machine. Tried and tested worldwide for over 40 years.

- Even lighter (100g lighter than the HTB)
- Extremely smooth operation
- Makes changing of tape and staples simple and fast
- Produces no tape offcuts
- Opening 50mm (max. binding 50mm)
- Weight 450g



CODE	DESCRIPTION	PRICE
PKMTHTR	MAX HT-R	
PKMTHTRB	Serrated Blades (pack of 2)	
PKM604E	Heavy Duty Max Staples (4,800)	
PKMTPVCGL40	Max Tape Light - Green - pk10 x 40m	
PKMTPVCWL40	Max Tape Light - White - pk10 x 40m	
PKMTPVCGM26	Max Tape Medium - Green - pk10 x 26m	
PKMTPVCBM26	Max Tape Medium - Blue - pk10 x 26m	
PKMTPVCRH16	Max Tape Heavy - Red - pk10 x 16m	
PKMTPVCGH16	Max Tape Heavy - Green - pk10 x 16m	

Packaging Tapes & Dispensers

25 and 50mm, clear or brown packaging tapes - ideal for carton making etc.

CODE	DESCRIPTION	PACK	PRICE
PKTD	Hand Held Tape Dispensor 50mm		
PKTB50	50mm x 66m Packaging Tape - Brown (sold in packs of 6 or boxes of 36)		
PKTC25	25mm x 66mm Tape - Clear		
PKTC50	50mm x 66mm Tape - Clear		

Premium Brass Padlocks

Top quality brass design and manufacture with precision mechanisms, these padlocks feature a solid brass body, paracentric keyway and antipick cylinder. This versatile, best selling range is also available as a service padlock allowing padlocks to be manufactured to specific keying requirements. 10 year guarantee.



CODE	D		æŕ	<i>@</i> =	PRICE
CK12525D	3	25mm	4.0mm	13mm	
CK12530D	4	30mm	4.8mm	17mm	
CK12540D	5	40mm	6.4mm	22.5mm	
CK12550D	7	50mm	8.0mm	28mm	
CK12560D	10	60mm	9.5mm	35.5mm	

Premium Brass Padlocks Keyed Alike

Keyed alike to sample key. Available in twin packs, quad packs or boxes of 12.



CODE	D		en i	800	PRICE
CK12540A	5	40mm	6.4mm	22.5mm	
CK12550A	7	50mm	8.0mm	28mm	
CK12560A	10	60mm	9.5mm	35.5mm	

Premium Brass Padlocks Closed Shackle



CODE	D		ent-	<i>@</i> C3	PRICE
CK12540XD	6	40mm	6.4mm	18.5mm	
CK12550XD	8	50mm	8.0mm	20.5mm	

Traditional Hasp & Staple

A traditional style hasp and staple, the Kasp 210 series offers a basic level of security for general applications. 10 year guarantee.



CODE	D		<u>•</u> :	PRICE
CK21075D	2	75mm	9mm	
CK21095D	4	95mm	13.4mm	
CK210115D	5	115mm	13.4mm	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

HORTICULTURAL PRODUCTION ACCESSORIES

Bamboo Canes

High quality Bamboo canes imported directly from China.

The weight factor represents the average weight of 100 canes.



CODE	HEIGHT	ММ	LB	BALE	PRICE
CANB0310120500	3′	10-12	9-11	500	
CANB0412140250	4′	12-14	18-20	250	
CANB0512140250	5″	12-14	24-26	250	
CANB0612140125	6"	12-14	28-32	125	
CANB0814160125	8′	16-17	44-48	125	

Green Split Canes

Ideal for dwarf peas, beans and bush tomatoes and all other small garden plants.



CODE	DESCRIPTION	BALE	PRICE
CANG3010000	Green Split Canes 30cm	10,000	
CANG4505000	Green Split Canes 45cm	5,000	
CANG6002500	Green Split Canes 60cm	2,500	
CANG7501250	Green Split Canes 75cm	1,250	
CANG9001250	Green Split Canes 90cm	1,250	



Staplers & Accessories

CODE		DESCRIPTION	PRICE
PKSAP35	A.	P35 Stapler	
PKSA354	P35	P35 Staples 6mm ¼" (5,040)	
PKSA356	35	P35 Staples 10mm ¾" (5,040)	

CODE		DESCRIPTION	PRICE
PKSAT50		T50 Tacker	
PKSA504	150	T50 Staples 6mm ¼" (5,000)	
PKSA506	150	T50 Staples 10mm ¾" (5,000)	
PKSA509	150'	T50 Staples 14mm 9/16" (5,000)	

CODE		DESCRIPTION	PRICE
PKSLR31		R31 Stapler	
PKSL341	THE STATE OF THE S	R31 Staples (5,000)	



CODE	DESCRIPTION	PRICE
CK9036	Pocket Knife 3¾"	

HORTICULTURAL KNIVES

Vegetable Knife

6cm / 21/2" Blade

Pocket Knife

High visibility red resin handle.

Blade 9cm / 31/2"



CODE	DESCRIPTION	PRICE
K302412	Vegetable Knife	
K847	Pocket Knife	

Paring Knife

A paring knife with a detachable peeler Its fine serrations slice vegetables and that's great for peeling and slicing fruit or vegetables.

fruit easily.

Multipurpose Knife

Blade 4'



CODE	DESCRIPTION	PRICE
K602001T	Peeler/Paring Knife	
K602002	Multi Purpose Knife	

Utility Knife

Blade 4"

Double Edged Knife

It's serrated on one side and ideal for harvesting leeks.

Blade 7¼"

Felco **All Purpose Knife**

All purpose knife. Small yet strong. Red nylon handle with standard alloy lining.

Stainless steel blade 57mm

Felco Light Grafting and Pruning Knife

Light grafting and pruning knife. Small yet strong. Red nylon handle with standard alloy lining.

Stainless steel blade 57mm





CODE	DESCRIPTION	PRICE
KV39050	Victorinox All Purpose Knife	
KV39060	Victorinox Pruning Knife	

Felco Ceramic Sharpening Stone

Medium and fine grained high purity corundum sharpening stone. Easy to use, it keeps its shape, and is ideal for the sharpening of pruning shears and cable cutters.





CODE	DESCRIPTION	PRICE
FELPF902	Felco Ceramic Sharpening Stone	

Cabbage Chopper



CODE	DESCRIPTION	PRICE
K828010	Cabbage Chopper 25cm (10")	
K828012	Cabbage Chopper 30cm (12")	

Boning Knife



CODE	DESCRIPTION	PRICE
K80396	Boning Knife 15cm (6")	
K80397	Boning Knife 18cm (7")	

Its slender, tapered blade is ideal for salads, vegetables and fruit.



CODE	DESCRIPTION	PRICE
K602003	Utility Knife	
K602007	Double Edged Leek Knife	

Super Sharpener

A quick & handy knife sharpener.

Shoe Knife

Poly Handle.





CODE	DESCRIPTION	PRICE
K602011	Super Sharpener	
K8932	Poly Handle Shoe Knife	

SCIENTIFIC EQUIPMENT FOR GROWERS

NPK Soil Test Kits NPK & pH

Easy to use test kits are ideal for either soil or soil-less applications. Easily check the levels of 4 key parameters in growing:



CODE	DESCRIPTION	PRICE
HANHI3895	Agricultural Test Kit, Basic (10 tests NPK & pH)	
HANHI3896	Agricultural Test Kit, Pro (25 tests NPK & pH)	

Budget pH Meter

Instantly tells you how acid or alkaline your soil is and checks which plants suit your garden. Includes a plant care listing.



Budget Soil Moisture Meter

Instantly tells you when to water your plants. Includes care listing for over 150 plants.



CODE	DESCRIPTION	PRICE
TEN3A021506	Soil pH Meter	
TEN3A021507	Soil Moisture Meter	

Digital Thermo-Hygrometer

Digital Thermometer and Hygrometer combined. Indicates maximum and minimum temperatures and humidity inside and outside.



Rainfall Measure

A conical shaped measure, calibrated in millimetres and inches.



CODE	DESCRIPTION	PRICE
TEN3A021052	Digital Thermometer/Hygrometer	
TEN3A021873	Rainfall Measure	

Thermometers

- A: Wall Thermometer
- Press Button Max-Min Thermometer. Records highest and lowest temperature and resets by pressing button.



CODE	DESCRIPTION	PRICE
TEN3A021846	A: Wall Thermometer	

- A: Dial Max-Min Thermometer
- Mini Dial Humidity Meter



CODE	DESCRIPTION	PRICE
TEN3A021843	A: Dial Max-Min Thermometer	
TEN3A021851	B: Mini Dial Humidity Meter	

- **Propagating Thermometer**
- Window Thermometer. Mounts directly onto glass.



CODE	DESCRIPTION	PRICE
TEN3A021845	A: Propagating Thermometer	
TEN3A021872	B: Window Thermometer	

SCIENTIFIC EQUIPMENT FOR GROWERS

Measuring Jugs

Durable plastic jugs with fully graduated scale measuring millilitres and litres. Ideal for measuring out liquid chemicals and fertilisers.



CODE	DESCRIPTION	PRICE
JUG02	Small Dose Measuring Jug 250ml	
JUG05	Measuring Jug 0.5L	
JUG10	Measuring Jug 1.0L	
JUG20	Measuring Jug 2.2L	
JUG50	Measuring Jug 5.0L	

On Balance IS Scales 10kg x 1g

Includes large bowl for measuring wettable powder chemicals and fertilisers.

- Backlit LCD screen
- Integrated spirit level
- USB Power adaptor
- Smudge-proof platform
- Large 2.2L weighing bowl
- Weighing units: g, kg, lb, oz, lb:oz



Spring Balance 1kg x 5g

Hand-held, light weighing device with overload mechanism.

CODE	DESCRIPTION	PRICE
OBIS10KG	On Balance Intrepid Series 10kg x 1g	
SAL01	Spring Balance 1kg x 5g	

Free and Total Chlorine Portable Photometer

The HI-96711 Free and Total Chlorine Portable Photometer combines accuracy and ease of use in an ergonomic, portable design. A user can accurately determine the concentration of free and total chlorine in a variety of water samples within a 0.00 to 5.00 mg/L (ppm) range using ready made reagents.

The HI-93701-01 are reagents for the colorimetric determination of free chlorine. There are enough reagents for 100 tests and are for use with Hanna's compatible portable photometers. These high quality reagents are clearly marked with the lot number and expiration date on each

packet for traceability.

Main Benefits

- CAL Check Validation and Calibration
- Built-in Timer
- Automatic shut off
- Battery status indicator



CODE	DESCRIPTION	PRICE
HANHI97711C	Free & Total Chlorine Portable Photometer	
HANHI9370101	Free Chlorine Reagents (100 Tests)	

Pocket Thermometers

Quick and accurate temperature measurement

Complete with unique calibration check, Hanna Checktemps are some of our best selling pocket thermometers. Calibration certificates available on request.



Checktemp

Checktemp is a compact meter with a direct probe, making it ideal for taking quick-fire temperature measurements in semi-solids and liquids.



Checktemp1

Checktemp1 comes with a sensor on a 1m length cable for easy access to hard-to-reach locations.

Main Benefits

- 100% accurate readout, whatever the viewing angle
- ideal for spot checks
- Instant measurement to HACCP requirements
- Protective cap supplied with Checktemp

CODE	DESCRIPTION	PRICE
HANHI98501	Checktemp	
HANHI98509	Checktemp1	

Waterproof Digital Max/Min Thermometer with K-Type Probe for Compost Temperatures Why is Compost Temperature so important?

Temperature is a key parameter determining the success of composting.

Compost heat is a by-product of the microbial breakdown of organic material. Decomposition occurs most rapidly during the thermophicic stage of composting (40 to 60°C).

This stage is also important as it destroys thermosensitive pathogens, weed seeds and fly larvae. So, heat in the compost is good, but if the temperature goes above 60 to 65° C the beneficial micro-organisms that are breaking down the compost begin to die off, hence the need to turn or aerate the pile.

Main Benefits

- Simple to use and robust
- Waterproof (and compost proof) rubberised keyboard designed to be used outdoors
- Clear LCD display shows current temperature measured as well as the max/min temperatures measured
- Choice of stainless steel 1m long probe or a long-reach, extra robust compost probe with T-handle



CODE	DESCRIPTION	PRICE
HANHI935005	W/P Digital Max/Min Thermometer	
HANHI766TR2	K-Type Stainless Steel Probe 1m x 10mm dia.	

pH - a definition

pH is a measure of how acidic or basic a solution is. It is measured on a scale from 0-14, with 7 being neutral, 0 the most acidic and 14 the most basic (alkaline).

Since solution pH affects the ability of plants to take in nutrients it is vital to monitor and control this crucial parameter. The correct pH is also necessary for the nutrients in the solution to be in the right chemical state to be taken up by the plant.

Groline

SCIENTIFIC PRODUCTS FOR GROWERS

HI98115



pH Tester

with Replaceable Electrode

The HI98115 pH tester offers advanced features for the measurement of pH in hydroponic nutrient solutions. The HI98115 is a very simple meter to operate with all functions including turning on/off and calibration performed with a single button. The HI98115 features a replaceable HI1271 pH electrode that can be changed when needed without having to buy a new meter.

- Range pH: 0-14.00
- Automatic calibration
- Auto shut off
- Stability indicator
- 1,000 hour battery life

CODE	DESCRIPTION	PRICE
HANHI98115	Groline pH Tester	
HANHI77400P	Calibration Kit [pH 10x20ml sachets]	
HANHI1271	HANHI1271 Spare pH Electrode	

HI98118

pH/Temperature Tester

with Extractable pH Electrode Junction

The HI-98118 pH/temperature tester is our latest pocket meter for measuring the pH of a hydroponic nutrient solution. The ergonomic design allows this tester to fit comfortably in your hand. The large easy to read LCD display shows both pH and temperature along with calibration, stability and low battery indicators. All operations are simplified to two buttons. One is for turning the meter on/off and the other for automatic one or two point calibration.

- Range pH: 0-14.00
- Automatic calibration
- Auto shut off
- Stability indicator
- 1,000 hour battery life



Grotine

pH



CODE	DESCRIPTION	PRICE
HANHI98118	Groline pH/Temperature Tester	
HANHI50036P	Quick Cal pH Solution [25 x 20ml sachets]	

HI98131 Combo

pH/EC/TDS Temperature Meter

with Replaceable pH Electrode Cartridge



The HI98131 is a slim, lightweight, and waterproof pocket sized meter that measures pH, conductivity (EC), total dissolved solids (TDS) and temperature. All operations and settings, including calibration buffers and temperature scale selections are made using two buttons.

- Waterproof
- Quick Cal mode to calibrate pH and EC/TDS with one solution
- TDS conversion factor selectable between 0.5 (500ppm) and 0.7 (700ppm)
- Range pH: 0-14.00
- Range EC: 0-6.0 mS/cm
- Range TDS: 0 to 3000ppm (500CF); 0 to 3999ppm (700CF)
- Temperature: 0 to 60.0°C
- Extractable pH Cloth Junction

nН	FC	TDS	°C/°F
рп	EC	פטון) C/F

CODE	DESCRIPTION	PRICE
HANHI98131	Groline Combo Meter	
HANHI50036P	Quick Cal pH/EC Solution [25 x 20ml sachets]	
HANHI7061012	Electrode Cleaning Solution [120ml Bottle]	
HANHI70300012	Electrode Storage Solution [120ml Bottle]	

EC/TDS - a definition

Electrical Conductivity (EC) is defined by the ability of a solution to conduct an electrical current. Total Dissolved Solids (TDS) is defined as the amount of solids dissolved in a solution.

The relationship between the amount of solids such as salts found in fertilisers is directly proportional to their conductivity. Therefore, the higher the amount of solids, the greater the conductivity. This is because when fertilisers are dissolved into water they become ions', which means that they become positively or negatively charged and can therefore conduct a current.



Groline SCIENTIFIC PRODUCTS FOR GROWERS

HI9814

pH/EC/TDS Temperature Meter

with Multiparameter Probe



The HI9814 is a slim, lightweight, and waterproof portable meter that measures pH, conductivity (EC), total dissolved solids (TDS) and temperature with a single amplified probe. All operations and settings, including calibration buffers and temperature scale selections, are made through only two buttons. The housing is waterproof and rated for IP67 conditions.

- 3 in 1 amplified probe with pH, EC/TDS and temperature sensors
- Quick Cal mode to calibrate pH and EC/TDS with one solution
- EC to TDS conversion factor selectable between 0.5 (500ppm) and 0.7 (700ppm)
- Range pH: 0-14.00
- Range EC: 0-6.0 mS/cm
- Range TDS: 0 to 3000ppm (500CF); 0 to 3999ppm (700CF)
- Temperature: 0 to 60.0°C
- Extractable pH Cloth Junction
- HI1294 pH/temperature probe for direct soil available



CODE	DESCRIPTION	PRICE
HANHI9814	Portable Multiparameter Meter	
HANHI50036P	Quick Cal pH/EC Solution [25 x 20ml sachets]	
HANHI7061012	Electrode Cleaning Solution [120ml Bottle]	
HANHI70300012	Electrode Storage Solution [120ml Bottle]	
HANHI1294D	pH/Temp Probe for Direct Soil	

HI98331 SoilTest™

Direct Soil EC Tester

with Built-in Stainless Steel Penetration Probe

The HI98331 Soil Test™ is a rugged and reliable pocketsized tester that offers quick and accurate readings. This direct soil EC tester features a stainless steel penetration probe for direct measurement of conductivity. With a compact size, single button operation, and automatic calibration, Soil Test is an excellent choice for taking direct conductivity measurements in soil.

- Range EC: 0-4.00 mS/cm
- Range Temp: 0 to 50.0°C
- One button operation
- 114mm stainless steel penetration probe
- **Automatic Temperature Compensation**



CODE	DESCRIPTION	PRICE
HANHI98331	Groline Direct Soil EC Tester	
HANHI70031P	Calibration Kit [EC 1413uS 25x20ml sachets]	

HI98318

Grotine

EC/TDS (ppm) Tester

with Graphite Sensor

The HI98318 is ideal for measuring the EC/TDS of a hydroponic solution. This meter is extremely ergonomic, fitting comfortably in your hand. The HI98318 has a very large easy to read LCD display that shows both EC or TDS and temperature along with calibration, stability and low battery indicators. All operations are simplified to just two buttons. One is for turning the meter on/off and the other for automatic one or two point calibration.

- Waterproof
- Quick calibration mode using Hanna Quick Cal pH/EC calibration solution
- Range EC: 0-6.00 mS/cm
- Range TDS: 0 to 3000ppm (500CF); 0 to 4000ppm (700CF)
- Range Temp: 0 to 50.0°C
- Two-button operation
- **Automatic Temperature Compensation**



CODE	DESCRIPTION	PRICE
HANHI98318	Groline EC/TDS Waterproof Tester	
HANHI50036P	Quick Cal pH/EC Solution [25 x 20ml sachets]	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

LS INSTALLATION, DESIGN & SERVICE



Automatic filtration.

Our qualified installation team are available to install all project work and service existing systems. We enjoy full technical support from the manufacturers of all key materials that we install.



Overhead anti-drip spraylines.



Suspended growing guttering.



Boom system watering.



Water storage tank installations.



Energy saving & shading screens.

DESIGN & INSTALLATION SERVICE AVAILABLE FOR THE FOLLOWING:

Greenhouse Irrigation Systems

- Overhead Irrigation Systems
- Drip Irrigation Systems
- Boom Irrigation Systems
- Fogging & Misting Systems
- Automatic Filtration Systems

Water Storage Tanks

- Storage Tank Liners
- Reservoir Liners

Polytunnel & Greenhouse Structures

- Polytunnel Covers
- Suspended Guttering Systems
- Energy Saving & Shading Screens
- Heaters

PRESSURE PIPES

Black LDPE Water Pipe SDR33, 4 bar

All pipes below are produced to the following standards: ISO 8796 and ISAE 435 for LDPE. This represents antistress cracking.



O.D. x I.D.	COIL	PRICE
5x3mm Soft	100m	
5x3mm Soft	200m	
12 x 10mm	100m	
16 x 13.6mm	100m	
20 x 17mm	100m	
25 x 21mm	100m	
	5x3mm Soft 5x3mm Soft 12 x 10mm 16 x 13.6mm 20 x 17mm	5x3mm Soft 100m 5x3mm Soft 200m 12 x 10mm 100m 16 x 13.6mm 100m 20 x 17mm 100m

Black LDPE Punched Pipe SDR33, 4 bar

O.D.	SPACING	COIL	PRICE
20mm	20cm	200m	
20mm	25cm	200m	
20mm	30mm	200m	
20mm	40mm	200m	
20mm	50mm	200m	
20mm	75mm	200m	
20mm	100mm	200m	
	20mm 20mm 20mm 20mm 20mm 20mm	20mm 20cm 20mm 25cm 20mm 30mm 20mm 40mm 20mm 50mm 20mm 75mm	20mm 20cm 200m 20mm 25cm 200m 20mm 30mm 200m 20mm 40mm 200m 20mm 50mm 200m 20mm 75mm 200m

Round **Plus** LDPE Pipe Clips

Plus Clips feature a return hook that holds cables and pipe tightly. Plus Clips are manufactured from a specially selected grade of UV stabilised polypropylene which combines strength and elasticity.



CODE	SIZE	вох	PRICE
MICT0506100	5 - 6mm	100	
MICT0911100	9 - 11mm	100	
MICT1518100	15 - 18mm	100	
MICT1924050	19 - 24mm	50	

Black Water Pipe - Rigid Lengths (PE100)

SDR11, 16 bar



CODE	O.D.	LENGTH	PRICE
PEL1011K032-6M	32mm	6m	
PEL1011K040-6M	40mm	6m	
PEL1011K050-6M	50mm	6m	
PEL1011K063-6M	63mm	6m	

Black Water Pipe - Rigid Lengths (PE100) SDR17, 10 bar

•				
CODE	O.D.	LENGTH	PRICE	
PEL1017K075-6M	75mm	6m		
PEL1017K090-6M	90mm	6m		
PEL1017K110-6M	110mm	6m		

Black MDPE Water Pipe (PE80) SDR13, 10 bar



CODE	O.D. x I.D.	COIL	PRICE
PEC0813K032050	32 x 27.2mm	50m	
PEC0813K032100	32 x 27.2mm 100m		
PEC0813K040050	40 x 34mm	50m	
PEC0813K040100	40 x 34mm	100m	
PEC0813K050050	50 x 42.6mm	50m	
PEC0813K050100	50 x 42.6mm	100m	

Blue MDPE Water Pipe (PE80)

To BS6572 (1985) Water Bye-laws Scheme Approved Product. For below ground potable water.

Larger diameter (90mm +) PE80 pipes in coils and rigid

To WIS 4-32-03 for below ground potable water. Many sizes available.



CODE	O.D.	COIL	SDR (BAR)	PRICE
PEC0809B020025	20mm	25m		
PEC0809B020050	20mm	50m	9 (16 bar)	
PEC0809B020100	20mm	100m		
PEC0811B025025	25mm	25m		
PEC0811B025050	25mm	50m	11 (12.5 bar)	
PEC0811B025100	25mm	100m		
PEC0811B032025	32mm	25m	11 (12.5 bar)	
PEC0811B032050	32mm	50m		
PEC0811B032100	32mm	100m		
PEC0811B050025	50mm	25m		
PEC0811B050050	50mm	50m	11 (12.5 bar)	
PEC0811B050100	50mm	100m		
PEC0811B063025	63mm	25m		
PEC0811B063050	63mm	50m	11 (12.5 bar)	
PEC0811B063100	63mm	100m		

LAND DRAINAGE PIPE

Single Wall Land Drainage Pipe

Excess water can lead to restricted land access, reduced crop yields, erosion and environmental damage. Effectively manage your water table with our Single Wall Land Drainage Pipe.

Also available on request are other sizes of perforated and un-perforated pipe and as Twin-wall for ducting and water transportation.



CODE	O.D.	PERF.	COIL	PRICE
PLD080050P	80mm	Yes	50m	
PLD080100P	80mm	Yes	100m	
PLD100050P	100mm	Yes	50m	
PLD100100P	100mm	Yes	100m	
PLD100100	100mm	No	100m	
PLD160050	160mm	No	50m	
PLD160050P	160mm	Yes	50m	

Drainage Pipe Fittings





CODE	DESCRIPTION	PRICE
PLDJ080	80mm Joiner	
PLDJ100	100mm Joiner	
PLDJ160	160mm Joiner	
PLDJ225	225mm Joiner	
PLDY125	60/125mm Y-Piece	
PLDY100	80/100mm x 60/100mm Maxi Y Piece	
PLDY160	125/160mm x 60/160mm Maxi Y Piece	
PLDS160	160mm Stop End	

Twin Wall Pipe & Fittings

The complete technical and commercial answer to all non-pressure, surface and subsurface water drainage applications.

Twin Wall comprises of two HDPE pipes which are extruded simultaneously, one inside the other, and heat welded together in one continuous process. The pipes are black in colour, the outer wall being corrugated and the inner wall having a smooth finish to assist the hydraulic flow. A comprehensive range of push-fit fittings and sealing rings are also available for each diameter.



CODE	DIAMETER	LENGTH	PRICE / LENGTH
PTWD110	110mm	6m	
PTWD225	225mm	6m	
PTWD300	300mm	6m	
PTWD450	450mm	6m	

RAINWATER PIPE

PVC Rainwater Pipe Class SN2 With Rubber Sealing Ring, 5m or 6m Lengths



	CODE	O.D. x Wall Thickness	PRICE PER M
	RARP51110	110 x 2.2mm	
4	RARP51125	125 x 2.5mm	
	RARP51160	160 x 3.2mm	
	RARP51200	200 x 4.0mm	
	RARP51250	250 x 4.9mm	
	RARP51315	315 x 6.2mm	

Our extensive range of Rainwater fittings can be found on page 152

PVC IRRIGATION PIPE

Imperial PVC Pipe Class D Pressure Pipe Plain Ends, 6m Lengths



CODE	SIZE	BAR	LENGTH	PRICE LENGTH
PCD125	11⁄4″	12	6.0	
PCD150	1½″	12	6.0	
PCD200	2"	9	6.0	
PCD300	3"	12	6.0	

PVC IRRIGATION PIPE

Metric PVC Pipe 10 bar Solvent Weld, 5m Lengths

Suitable for water supply in all irrigation systems both above and below ground. Socketed for solvent cement join.



CODE		O.D. x Wall Thickness	PRICE PER LENGTH
P160016		16 x 1.0mm	
	P100020	20 x 1.0mm	
	P100025	25 x 1.25mm	
	P100032	32 x 1.8mm	
	P100040	40 x 2.0mm	
	P100050	50 x 2.4mm	
	P100063	63 x 2.4mm	
	P100075	75 x 2.9mm	
	P100090	90 x 3.5mm	
	P100110	110 x 4.2mm	
	P100125	125 x 4.8mm	
	P100160	160 x 6.2mm	

PVC Sprayline Solvent Weld, Ø 32 x 1.8mm 10 bar



CODE	LENGTH	SPACING	DRILLING	PRICE LENGTH
PS511	5.04m	100cm	M11	
PS311	4.54m	150cm	M11	
PS538	5.04m	100cm	3/8WW	
PS338	4.54m	150cm	3⁄8WW	

Adhesives & Cleaners



CODE	DESCRIPTION	SIZE	PRICE
SEA28100250	SABA 2810	250ml	
SEA28101000	SABA 2810	1 Litre	
SEAS30250	SABA S3	250ml	
SEAS31000	SADA 33	1 Litre	
SEAWD0250	Weld-On Wet 'R Dry	250ml	
SEACF0250	Character El 14	250ml	
SEACF0650	Cleaning Fluid	650ml	

PIPE CLAMPS & CLIPS

Pipe Clamp





With clip only from 40mm and up

Pipe Clamp Spacing Block





Cable Ties (BS 5750)

Many uses from supporting pipe to sealing bags. Colour is black, UV stabilised - other colours available on request as well as releasable ties too.

CODE	SIZE	QUANTITY	PRICE
CT10025B	4" x 3/32"	100	
CT16048B	6" x 3/16"	100	
CT20048B	8" x 3/16"	100	
CT30048B	12" x 3/16"	100	
CT37076B	15" x 5/16"	100	
CT53048B	21" x 3/16"	100	

Galv. Wire Hooks

Use at every 1m of pipe for sprayline support. Other sizes available.

Plastic clip that supports pipe
fastening to the straining
wire. Used in tunnels and
glasshouses where there
is little headroom. Size
fits outside diameter of
pipe.
The state of the s

Tylene Clip

CODE	SIZE	PRICE
H16	16cm	
H20	20cm	
H24	24cm	
H28	28cm	
H40	40cm	
H60	60cm	

CODE	SIZE	PRICE
HT16	16mm	
HT20	20mm	
HT25	25mm	
HT32	32mm	

The majority of our fittings are designed for a maximum service life of 50 years with a pressure rating of PN16 (16 bar at 20°C). For gluing we recommend that cleaning fluid is applied beforehand:

Fittings of 40mm or less - SABA 914 glue

sales: 01772 812484

Fittings of 50mm or more - SABA S3 glue



Socket [Plain]

CODE	Ø mm	BAR	PRICE
VD390010	10	16	
VD390012	12	16	
VD390016	16	16	
VD390020	20	16	
VD390025	25	16	
VD390032	32	16	
VD390040	40	16	
VD390050	50	16	
VD390063	63	16	
VD390075	75	16	
VD390090	90	16	
VD390110	110	16	
VD390125	125	16	
VD390160	160	16	



Conversion Socket [Plain]

Metric to Imperial

CODE	Ø mm	Ø	BAR	PRICE
VD394020	20mm	1/2"	16	
VD394025	25mm	3/4"	16	
VD394032	32mm	1″	16	
VD394040	40mm	11⁄4″	16	
VD394050	50mm	1½″	16	
VD394063	63mm	2"	16	
VD394090	90mm	3″	16	·
VD394110	110mm	4"	16	



Reducing Socket [Plain]

CODE	Ø mm	Ø mm	BAR	PRICE
VD392025	25/20	12	16	
VD392041	40/32	20	16	
VD392052	50/40	32	16	
VD392064	63/50	32	16	
VD392065	63/50	40	16	
VD392076	75/63	40	16	
VD392077	75/63	50	16	
VD392092	90/75	63	16	
VD392112	110/90	75	16	
VD392125	125/110	63	16	
VD393161	160/140	110	16	



Socket [BSP(Fm)]

CODE	BSP(Fm)	BAR	PRICE
VD326010	1/4"	16	
VD326015	3⁄8″	10	
VD326020	1/2"	10	
VD326025	3/4"	10	
VD326030	1″	10	
VD326035	11⁄4″	10	
VD326040	1½"	10	
VD326045	2"	10	

www.lssystems.co.uk



Socket [Plain x BSP(Fm)]

CODE	Ø mm	BSP(Fm)	BAR	PRICE
VD325020	20	1/2"	10	
VD325026	25	1/2"	16	
VD325030	25	3/4"	10	
VD325036	32	1/2"	16	
VD325041	32	3/4"	16	
VD325045	32	1″	10	
VD325051	40	1″	16	
VD325055	40	11⁄4″	10	
VD325061	50	11⁄4″	16	
VD325065	50	1½″	10	
VD325069	63	1½″	16	
VD325070	63	2″	10	
VD325081	75	2½″	10	
VD325091	90	3″	10	
VD325101	110	4"	10	



Nipple [BSP(M)]

CODE	BSP(M)	BSP(M)	BAR	PRICE
VD335035	1/4"	1/4"	16	
VD335040	3/8"	1/4"	16	
VD335045	3/8"	3/8"	16	
VD335050	1/2"	3/8"	16	
VD335055	1/2"	1/2"	16	
VD335060	3/4"	1/2"	16	
VD335065	3/4"	3/4"	16	
VD335070	1″	3/4"	16	
VD335075	1″	1″	16	
VD335080	11⁄4″	1″	16	
VD335085	11⁄4″	1¼″	16	
VD335090	1½"	1¼″	16	
VD335095	1½"	1½″	16	
VD335100	2″	1½"	16	
VD335105	2"	2"	16	
VD150030	3″	3"	16	





CODE	Ø mm	BSP(M)	BAR	PRICE
VD315040	16	1/2"	16	
VD315050	20	1/2"	16	
VD315055	20	3/4"	16	
VD315060	25/32	1/2"	16	
VD315065	25/32	3/4"	16	
VD315070	25/32	1″	16	
VD315075	32/40	1/2"	16	
VD315080	32/40	3/4"	16	
VD315085	32/40	1″	16	
VD315090	32/40	11/4"	16	
VD315095	40/50	1″	16	
VD315100	40/50	11/4"	16	
VD315105	40/50	1½″	16	
VD315110	50/63	1″	16	
VD315115	50/63	11/4"	16	
VD315120	50/63	1½″	16	
VD315125	50/63	2"	16	
VD315130	63/75	11/4"	16	
VD315135	63/75	1½"	16	
VD315140	63/75	2"	16	
VD315150	75/90	2"	16	
VD315160	75/90	3"	16	
VD315170	90/110	3″	16	
VD315175	90/110	4"	16	
VD315180	110	3″	16	
VD315185	110	4"	16	
		<u> </u>		

Reducing Bush [Plain x BSP(Fm)]

CODE	Ø mm	BSP(Fm)	BAR	PRICE
VD310020	20	1/4"	16	
VD310026	25	1/2"	16	
VD310032	32	1/2"	16	
VD310033	32	3/4"	16	
VD310040	40	3/4"	16	
VD310041	40	1″	16	
VD310050	50	1″	16	
VD310051	50	11⁄4″	16	
VD310062	63	1″	16	
VD310063	63	11⁄4″	16	
VD310064	63	1½"	16	
VD310075	75	1½″	16	
VD310076	75	2″	16	
VD310112	110	3″	16	

Reducing Ring [Plain]



CODE	Ømm	Ømm	BAR	PRICE
VD305020	20	16	16	
VD305025	25	16	16	
VD305026	25	20	16	
VD305032	32	16	16	
VD305033	32	20	16	
VD305034	32	25	16	
VD305041	40	20	16	
VD305042	40	25	16	
VD305043	40	32	16	
VD305051	50	25	16	
VD305052	50	32	16	
VD305053	50	40	16	
VD305064	63	32	16	
VD305065	63	40	16	
VD305066	63	50	16	
VD305075	75	32	16	
VD305076	75	40	16	
VD305077	75	50	16	
VD305078	75	63	16	
VD305090	90	50	16	
VD305091	90	63	16	
VD305092	90	75	16	
VD305112	110	75	16	
VD305113	110	90	16	
VD305127	125	110	16	
VD305162	160	125	16	

Rend 90° [Plain]

	bend 90	i [Piairi]		
	CODE	Ø mm	BAR	PRICE
	VD220025	25	16	
	VD105032	32	10	
100	VD105040	40	10	
	VD105050	50	10	
	VD105063	63	10	
	VD105075	75	10	
	VD105090	90	16	
	VD105110	110	12.5	
	VD105160	160	12.5	
7	Rand 15	° [Dlain]		



Bend 45° [Plain]

CODE	Ø mm	BAR	PRICE
VD115032	32	10	
VD115040	40	10	
VD115050	50	10	
VD115063	63	10	
VD115075	75	10	
VD116090	90	16	
VD115110	110	12.5	
VD115125	125	12.5	
VD115160	160	12.5	



Elbow 90° [Plain]

CODE	Ø mm	BAR	PRICE
VD225012	12	16	
VD225016	16	16	
VD225020	20	16	
VD225025	25	16	
VD225032	32	16	
VD225041	40	10	
VD225051	50	10	
VD225064	63	10	
VD225075	75	16	
VD225090	90	16	
VD225110	110	16	
VD225160	160	16	



Elbow 90° [Plain x BSP(Fm)]

www.lssystems.co.uk

CODE	Ø mm	BSP(Fm)	BAR	PRICE
VD235020	20	1/2"	10	
VD235025	25	3/4"	10	
VD235032	32	1″	10	
VD235040	40	11⁄4″	10	
VD235050	50	1½"	10	
VD235063	63	2″	10	



Elbow 45° [Plain]

CODE	Ø mm	BAR	PRICE
VD230012	12	16	
VD230016	16	16	
VD230020	20	16	
VD230025	25	16	
VD230032	32	16	
VD230040	40	16	
VD230050	50	16	
VD230063	63	16	
VD230075	75	16	
VD230090	90	16	
VD230110	110	16	
VD230160	160	16	



Tee [Plain]

CODE	Ø mm	BAR	PRICE
VD201016	16	16	
VD201020	20	16	
VD201025	25	16	
VD201033	32	10	
VD201041	40	10	
VD201051	50	10	
VD201064	63	10	
VD201075	75	16	
VD201090	90	16	
VD201110	110	16	
VD201125	125	16	
VD201160	160	16	



Reducing Elbow 90° [Plain]

CODE	Ø mm	Ø mm	BAR	PRICE
VD226011	40	32/40	10	
VD226021	50	32/40	10	
VD226031	50	40/50	10	



Tee 45° [Plain]

CODE	Ø mm	BAR	PRICE
VD208032	32	16	
VD208040	40	16	
VD208050	50	16	
VD208063	63	10	
VD208075	75	10	



Elbow 90° [Plain x BSP(M)]

CODE	Ø mm	BSP(M)	BAR	PRICE
VD229010	20	3/4"	16	
VD229020	25	1″	16	
VD229030	32	3/4"	10	
VD229040	32	1″	10	
VD229051	32	11⁄4″	10	
VD229061	40	1¼″	10	
VD229071	40	1½"	10	
VD229081	50	11⁄4″	10	
VD229091	50	1½"	10	



Cross [Plain]

CODE	Ø mm	Ø mm	BAR	PRICE
VD250020	20		16	
VD250025	25		16	
VD250032	32		16	
VD250039	40	32	16	
VD250040	40		16	
VD250049	50	32	16	
VD250050	50		16	
VD250063	63		16	
VD250075	75		10	
VD250090	90		10	
VD250110	110		10	



CODE	Ø mm	BAR	PRICE
VD110032	32	10	
VD110050	50	10	

Reducing Tee [Plain]

_					
	CODE	Ø mm	Ø mm	BAR	PRICE
	VD203010	25	20	16	
	VD203015	32	20	16	
	VD203020	32	25	16	
	VD203025	40	25	16	
Г	VD203031	40	32	10	
	VD203035	50	25	16	
	VD203041	50	32	10	
	VD203046	50	40	10	
	VD203055	63	32	16	
	VD203060	63	40	16	
	VD203065	63	50	16	
	VD203070	75	32	16	
	VD203075	75	40	16	
	VD203080	75	50	16	
	VD203085	75	63	16	
	VD203090	90	32	16	
	VD203095	90	50	16	
	VD203097	90	63	16	
	VD203100	90	75	16	
	VD203105	110	32	16	
	VD203112	110	75	16	
	VD203115	110	90	16	
L	VD203154	160	90	16	

Tee [Plain x BSP(M)]

CODE	Ø mm	BSP(M)	BAR	PRICE
VD205015	20	3/4"	16	
VD205020	25	3/4"	16	
VD205025	25	1″	16	
VD205030	32	3/4"	16	
VD205035	32	1″	16	
VD205046	32	11⁄4″	10	
VD205060	40	1″	16	
VD205066	40	1¼″	10	
VD205071	40	1½″	10	
VD205075	50	1″	16	
VD205081	50	1¼"	10	
VD205086	50	1½″	10	
VD205090	63	1″	16	
VD205095	63	11⁄4″	16	
VD205100	63	1½″	16	
VD205105	63	2″	16	
VD205110	75	11⁄4″	16	
VD205120	75	2″	16	

Tee [BSP(M) x Plain]

CODE	BSP(M)	Ø mm	BAR	PRICE
VD205041	1″	32	10	
VD205051	11⁄4″	32	10	
VD205067	11⁄4″	40	10	

Tee [Plain x BSP(Fm)]

PRICE



Cap [BSP(Fm)] supplied with washer

	` '- ''		
CODE	BSP(Fm)	BAR	PRICE
VD340010	3/8"	10	
VD340020	1/2"	10	
VD340030	3/4"	10	
VD340040	1"	10	
VD340050	11⁄4″	10	
VD340060	11/2"	10	
VD340072	2"	10	
VD340092	3"	10	
VD340102	4"	6	


Cap Washer [EPDM Rubber]

CODE	Ø (external)	PRICE
VD805010	1/2"	
VD805015	3/4"	
VD805020	1″	
VD805025	11⁄4″	
VD805030	1½″	
VD805035	2"	

Cap [Plain]











Plug [BSP(M)]

CODE	BSP(M)	BAR	PRICE
VD345025	1/4"	16	
VD345030	3/8"	16	
VD345040	1/2"	16	
VD345045	3/4"	16	
VD345050	1″	16	
VD345055	1¼"	16	
VD345060	1½"	16	
VD345065	2"	16	



Union [Plain]

CODE	Ø mm	BAR	PRICE
VD360012	12	16	
VD360016	16	16	
VD360020	20	16	
VD360025	25	16	
VD360032	32	16	
VD360040	40	16	
VD360050	50	16	
VD360063	63	16	
VD360075	75	10	
VD360090	90	10	
VD360110	110	10	



End Set [Plain x BSP]

CODE	Ø mm	BSP	BAR	PRICE
VD377020	20	1/2"	10	
VD377025	25/32	3/4"	10	
VD377032	32/40	1″	10	
VD377035	32/40	11/4"	10	
VD377040	40/50	11/4"	10	



Union [Plain x BSP(M)]

CODE	Ø mm	BSP(M)	BAR	PRICE
VD370025	25	3/4"	16	
VD370032	32	1″	16	
VD370040	40	11/4"	16	
VD370050	50	1½″	16	
VD370063	63	2″	16	



Drain Valve

Filter 32

CODE	Ø mm	BAR	PRICE
VD380020	unit only 1¼"(F)	6	
VD380025	unit + elbow 32	6	

NOTE: Used to drain excess water from spraylines after watering to stop spray nozzles from dripping onto crop. We do not recommend Drain Valves to be used with Antidrip Nozzles.



Tank Outlet [Plain x BSP(M)]

CODE	Ø mm	BSP(M)	PRICE
VD516020	20/25	3/4"	
VD516021	20/¾"	3/4"	
VD516025	25/32	1″	
VD516026	25/1"	1″	
VD516034	32/40	11/4"	
VD516041	40/50	1¾″	
VD516042	40/1½"	1¾"	
VD516048	50/63	2″	
VD516049	50/2"	2″	
VD516065	63/75	2½″	
VD516075	75/90	3″	



ı	CODE	Ø mm	PRICE
	VD530032	30(d1) x 23mm(d2)	



3/3 Union [Socketed Fm Type A]

CODE	Ø mm	BAR	PRICE
VD375020	32	7.5	

NOTE: When used with the above Filter - please use an extra O-Ring seal.



O-Ring for Threaded Union

CODE	Ø mm (I.D. x thickness)	PRICE
VD806020	20mm (20.22 x 3.53)	
VD806025	25mm (28.17 x 3.53)	
VD806032	32mm (32.92 x 3.53)	
VD806040	40mm (40.64 x 5.33)	
VD806050	50mm (46.99 x 5.33)	
VD806063	63mm (59.69 x 5.33)	
VD806075	75mm (78.74 x 5.33)	
VD806090	90mm (97.79 x 5.33)	



2/3 Union [Socket x BSP(Fm)]

CODE	Ø mm	BSP(Fm)	BAR	PRICE
VD375030	32	1¼″	7.5	



Union [Plain x BSP(Fm)]

CODE	Ø mm	BSP(M)	BAR	PRICE
VD365025	25	3/4"	10	
VD365032	32	1″	10	
VD365040	40	11/4"	10	
VD365050	50	1½"	10	
VD365063	63	2"	10	
VD365090	90	3″	10	

IBC Adaptors [Female thread x Female thread]

IBC off-load adaptors used for converting IBC Buttress Thread to BSP which are designed to be quick, secure, easy to maintain and compatible with the vast majority of products transported in IBC's.

Moulded in food grade glass coupled polypropylene; seals included as standard. All bagged and labelled for easy identification and cleanliness.





CODE	DESCRIPTION	PICTURE	PRICE
IBCAD200FS1008	2"BSP(F) x S100X8(F) Buttress G/P/P c/w Seals		
IBCAD125FS606	11/4"BSP(F) x S60X6(F) Buttress G/P/P c/w Seals		
IBCAD150FS606	1½"BSP(F) x S60X6(F) Buttress G/P/P c/w Seals	l l	
IBCAD200FS606	2"BSP(F) x S60X6(F) Buttress G/P/P c/w Seals		

Full Face Rubber Flange Gaskets PN16



CODE	DIAMETER	HOLES	PRICE
FPGR1504H	50mm (11/2")	4	
FPGR2004H	63mm (2")	4	
FPGR2504H	75mm (21/2")	4	
FPGR3008H	90mm (3")	8	
FPGR4008H	110mm (4")	8	
FPGR6008H	160/180mm (6")	8	
FPGR8008H	200/225mm (8")	8	

PVC Backing Flange



	CODE	Ø mm	NxD	BAR	PRICE
	VD372032	32	4x16		
Ì	VD372040	40	4x18		
ĺ	VD372050	50	4x18		
	VD372063	63	4x18		
ĺ	VD372075	75	4x18		
Ì	VD372090	90	8x18		
	VD372110	110	8x18		
Ì	VD372125	125	8x18		
ĺ	VD372160	160	8x22	10	
Ì	VD372200	200	8x22	10	
Ì	VD372250	250	8x22	10	

PVC Flange Adaptor



CODE	Ø mm	PRICE
VD372033	32	
VD372041	40	
VD372051	50	
VD372064	63	
VD372076	75	
VD372091	90	
VD372111	110	
VD372126	125	
VD372161	160	
VD372201	200	
VD372251	250	

Flange Nuts, Bolts & Washers



CODE	SIZE	PRICE
FIXM16B045	M16 x 45mm Bolt	
FIXM16B060	M16 x 60mm Bolt	
FIXM16B070	M16 x 70mm Bolt	
FIXM16B080	M16 x 80mm Bolt	
FIXM16B090	M16 x 90mm Bolt	
FIXM16B100	M16 x 100mm Bolt	
FIXM16B110	M16 x 110mm Bolt	
FIXM16B120	M16 x 120mm Bolt	
FIXM16N	M16 Nut	
FIXM16W	M16 Washer	

Gasket for Flange



CODE	Ø mm	PRICE
VD804032	32	
VD804040	40	
VD804050	50	
VD804063	63	
VD804075	75	
VD804090	90	
VD804110	110	
VD804125	125	
VD804160	160	
VD804200	200	
VD804250	250	

METRIC PVC VALVES



PVC Single Union Valve [Plain]

CODE	Ø mm	PRICE
VD605020	20	
VD605025	25	
VD605032	32	
VD605040	40	
VD605050	50	
VD605063	63	
VD605075	75	
VD605090	90	
VD605110	110	

fax: 01772 815417

Imp. Dbl Union Valve [Plain]

CODE	DIAMETER	BAR	PRICE
VD613020	1/2"	16	
VD613025	3/4"	16	
VD613032	1″	16	
VD613040	11⁄4″	16	
VD613050	1½″	16	
VD613063	2"	16	
VD613090	3″	10	
VD613110	4"	10	

PVC Double Union Valve [Plain]



CODE	Ø mm	BAR	PRICE
VD615016	16	16	
VD615020	20	16	
VD615025	25	16	
VD615032	32	16	
VD615040	40	16	
VD615050	50	16	
VD615063	63	16	
VD615075	75	10	
VD615090	90	10	
VD615110	110	10	

Tre effect valve [Flam]					
CODE	Ø mm	BAR	PRICE		
VD660025	25	16			
VD660032	32	16			
VD660040	40	16			
VD660050	50	16			
VD660063	63	16			
VD660075	75	10			
VD660090	90	10			
VD660110	110	10			

PVC Check Valve [Plain]

PVC Butterfly Valve including Flanges & Fasteners 16 bar



CODE	Ø mm	PRICE
VD678075	75	
VD678090	90	
VD678110	110	
VD678160	160	



PVC Non Return Valve

CODE	Ø mm	Nom. I.D.	PRICE
VD422016	16	1/2"	
VD422020	20	5/8"	
VD422025	25	3/4"	

PVC Valve Seal Kits EPDM



CODE	Ø mm	PRICE
VD640020	20	
VD640025	25	
VD640032	32	
VD640040	40	
VD640050	50	
VD640063	63	
VD640075	75	
VD640090	90	



Flushing Valve [Barb]

CODE	Ø mm	Nom. I.D.	PRICE
NK374016	16	1/2"	



Ball Valve [BSP(FmxM)]

CODE	BSP(Fm)	BSP(M)	PRICE
NK370901	3/4"	3/4"	

IMPERIAL PVC FITTINGS



Socket [Plain]

CODE	DIAMETER	BAR	PRICE
VD391020	1/2"	16	
VD391025	3/4"	16	
VD391032	1″	16	
VD391040	11⁄4″	16	
VD391050	1½″	16	
VD391063	2"	16	
VD391075	2½"	16	
VD391090	3″	16	
VD391110	4"	16	

Tee [Plain]



Socket [Plain x BSP(Fm)]



CODE	Ø	BSP(Fm)	BAR	PRICE
VD324021	1/2"	1/2"	16	
VD324030	3/4"	1/2"	16	
VD324031	3/4"	3/4"	16	
VD324044	1″	1/2"	16	
VD324045	1"	3/4"	16	
VD324046	1"	1″	16	
VD324054	11⁄4″	3/4"	16	
VD324055	11⁄4″	1″	16	
VD324056	11⁄4″	11⁄4″	16	
VD324064	1½″	1″	16	
VD324065	1½″	11⁄4″	16	
VD324066	1½″	1½″	16	
VD324069	2″	11⁄4″	16	
VD324070	2″	1½″	16	
VD324071	2"	2"	16	

Elbow 90° [Plain]



Hex Ad. [Plain x BSP(M)]



CODE	Ø	BSP(M)	BAR	PRICE
VD316050	1/2"	1/2"	16	
VD316055	1/2"	3/4"	16	
VD316065	3/4"	3/4"	16	
VD316070	3/4"	1″	16	
VD316085	1"	1″	16	
VD316090	1"	11⁄4″	16	
VD316100	11⁄4″	11⁄4″	16	
VD316105	11⁄4″	1½″	16	
VD316120	1½″/63	1½″	16	
VD316125	1½″/63	2"	16	
VD316135	2″/75	1½″	16	
VD316140	2″/75	2"	16	

Elbow 45° [Plain]



Cap [Plain]



CODE	DIAMETER	BAR	PRICE
VD356020	1/2"	16	
VD356025	3/4"	16	
VD356032	1″	16	
VD356040	11⁄4″	16	
VD356050	11/2"	16	
VD356063	2"	16	
VD356090	3"	16	
VD356110	4"	16	

Cross [Plain]



CODE	DIAMETER	BAR	PRICE
VD251050	1½″	10	
VD250075	2½″/75	10	

IMPERIAL PVC FITTINGS



Reducing Bush [Plain]

CODE	Ø	Ø	BAR	PRICE
VD306020	1/2"	3/8"	16	
VD306026	3/4"	1/2"	16	
VD306033	1″	1/2"	16	
VD306034	1″	3/4"	16	
VD306042	11⁄4″	3/4"	16	
VD306043	11/4"	1″	16	
VD306051	11/2"	3/4"	16	
VD306052	1½″	1″	16	
VD306053	11/2"	11/4"	16	
VD306064	2"	1″	16	
VD306065	2"	11⁄4″	16	
VD306066	2"	1½″	16	
VD306078	2½"	2″	16	
VD306090	3″	1½″	16	
VD306091	3"	2"	16	
VD306092	3″	2½″	16	
VD306111	4"	2″	16	
VD306113	4"	3"	16	



Pipe Clamp with Clip

CODE	DIAMETER	PRICE
VD523020	1/2"	
VD523025	3/4"	
VD523032	1″	
VD523040	11⁄4″	
VD523050	11/2"	
VD523063	2"	
VD525075	2½"/75	
VD525090	3″/90	




Plain/Threaded Nipple

CODE	DIA.	BSP(M)	PRICE
NK809411	1/2"	1/2"	
NK809422	3/4"	3/4"	
NK809433	1"	1″	
NK809444	11⁄4″	11⁄4″	
NK809455	1½″	1½″	
NK809466	2"	2"	
NK809499	3″	3"	



Union [Plain]

CODE	DIAMETER	BAR	PRICE
VD361020	1/2"	16	
VD361025	3/4"	16	
VD361032	1″	16	
VD361040	1¼"	16	
VD361050	1½"	16	
VD361063	2"	16	
VD361090	3"	10	
VD361110	4"	10	





4	

Union [Plain x BSP(M)]

CODE	Ø	BSP(M)	BAR	PRICE
VD371020	1/2"	1/2"	16	
VD371025	3/4"	3/4"	16	
VD371032	1"	1″	16	
VD371040	11⁄4″	11⁄4″	16	
VD371050	11/2"	1½"	16	
VD371063	2"	2″	16	
VD371090	3″	3″	10	

CODE	SIZE	BAR	LENGTH	PRICE LENGTH
PCD125	11⁄4″	12	6.0	
PCD150	1½″	12	6.0	
PCD200	2"	9	6.0	
PCD300	3"	12	6.0	
PCD400	4"	9	6.0	



Union [Plain x BSP(Fm)]

CODE	Ø	BSP(Fm)	BAR	PRICE
VD366020	1/2"	1/2"	10	
VD366025	3/4"	3/4"	10	
VD366032	1″	1″	10	
VD366040	11/4"	11⁄4″	10	
VD366050	11/2"	11/2"	10	
VD366063	2"	2"	10	
VD366090	3″	3″	10	

ACETAL BARBED FITTINGS



Adaptor [BSP(M)]

CODE	Ø mm	BSP(M)	BAR	PRICE
BARHA12050-A	12	1/2"	7.5	
BARHA12075-A	12	3/4"	7.5	
BARHA16050-A	16	1/2"	7.5	
BARHA16075-A	16	3/4"	7.5	
BARHA20050-A	20	1/2"	7.5	
BARHA20075-A	20	3/4"	7.5	
BARHA25050-A	25	1/2"	7.5	
BARHA25075-A	25	3/4"	4	
BARHA25100	25	1″	4	
BARHA32100	32	1"	4	



Adaptor [BSP(Fm)]

CODE	Ø mm	BSP(F)	BAR	PRICE
BARHF16075-A	16	3/4"	7.5	
BARHF20075-A	20	3/4"	7.5	



Elbow 90°

CODE	Ø mm	BAR	PRICE
BARE12-A	12	7.5	
BARE16-A	16	7.5	
BARE20-A	20	7.5	
BARE25-A	25	7.5	
BARE32	32	4	



Elbow 90° [BSP(M)]

CODE	Ø mm	BSP(M)	BAR	PRICE
BARE12075M-A	12	3/4"	7.5	
BARE16050M-A	16	1/2"	7.5	
BARE16075M-A	16	3/4"	7.5	
BARE20050M-A	20	1/2"	7.5	
BARE20075M-A	20	3/4"	4	
BARE25050M-A	25	1/2"	4	
BARE25075M-A	25	3/4"	4	
BARE32100M	32	1"	4	

Tee 90°



CODE	Ø mm	BAR	PRICE
BART12-A	12	7.5	
BART16-A	16	7.5	
BART20-A	20	7.5	
BART25-A	25	4	
BART32	32	4	

Reducing/Enlarging Tee 90°

CODE	Ø mm	BAR	PRICE
BART1612-A	16x12x16	7.5	
BART1620	16x20x16	4	
BART2012-A	20x12x20	7.5	
BART2016-A	20x16x20	7.5	
BART2516	25x16x25	4	
BART2520-A	25x20x25	7.5	



Tee 90° [BSP(M)]

CODE	Ø mm x BSP(M)	BAR	PRICE
BART12050M-A	12 x ½″ x 12	7.5	
BART12075M-A	12 x ¾" x 12	4	
BART16050M	16 x ½" x 16	4	
BART16075M	16 x ¾" x 16	4	
BART20050M-A	20 x ½" x 20	4	
BART20075M-A	20 x ¾" x 20	7.5	
BART25075M-A	25 x ¾" x 25	4	

Joiner



CODE	Ø mm	Ø mm	BAR	PRICE
BARJ12-A	12	12	7.5	
BARJ16-A	16	16	7.5	
BARJ20-A	20	20	7.5	
BARJ25-A	25	25	7.5	
BARJ32	32	32	4	

Reducing Joiner

•				
CODE	Ø mm	Ø mm	BAR	PRICE
BARJ1612-A	16	12	7.5	
BARJ2012-A	20	12	7.5	
BARJ2016-A	20	16	7.5	
BARJ2516	25	16	4	
BARJ2520-A	25	20	4	

ACETAL BARBED FITTINGS



Barbed Y [¾" BSP]

CODE	OUTLETS	Ø mm	BSP	PRICE
BARY216075M	2	16	³⁄4" (M)	
BARY220075M	2	20	³⁄4" (M)	
BARY316075M	3	16	¾" (M)	
BARY320075M	3	20	¾" (M)	

PVC Dripline Start Connector

- · Flexible leakfree joint
- · Minimal flow restriction
- Long life working with chemicals and to exposure outdoors



CODE	Ø mm	BAR	PRICE
BARG16-A	16	7.5	
BARG20-A	20	7.5	
BARGG	Grommet Only	-	

Ground Pipe Stake 16/20mm

CODE	DESCRIPTION	PRICE
NK209716	For 16/20mm LDPE Pipe	



End Plug

CODE	Ø mm	BAR	PRICE
BARP12-A	12	7.5	
BARP16-A	16	7.5	
BARP20-A	20	7.5	

Pipe End Clamp



Acetal In-Line Valve [Barb x Barb]





www.lssystems.co.uk

	CODE	Ø mm	Ø mm	PRICE
4	PLV016	16	16	
/	PLV020	20	20	

Acetal In-Line Valve [Barb x BSP(M)]



CODE	Ø mm	BSP(M)	PRICE
PLV016050M	16	1/2"	
PLV016075M	16	3/4"	
PLV020050M	20	1/2"	
PLV020075M	20	3/4"	
PLV025075M	25	3/4"	

Acetal In-Line Valve [BSP(M)]



CODE	BSP(M)	BSP	PRICE
PLV050M	1/2"	½" (M)	
PLV075M	3/4"	³⁄4" (M)	

Streamline Valves



CODE	SIZE	PRICE
PLVSTR075M	Streamline x ¾"(M)	
PLVSTR16	Streamline x 16mm	

TEFEN FITTINGS

Material: Nylon 66 Colour: Blue

Up to 14 BAR (200 psi) Working Pressure:

Temperature: -20°C - 110°C (subject to application)

Plug



CODE	BSP (M)	PRICE
NK22TTP1	1/8"	
NK22TTP2	1/4"	
NK22TTP3	3/8"	
NK22TTP4	1/2"	



CODE	BSP (M)	PRICE
NK22TTN2	1⁄4" x 1⁄4"	
NK22TTN3	3/8" × 3/8"	
NK22TTN4	½" x ½"	

Hose Connector

CESTELL

CODE	SIZE	PRICE
NK22TBC0505	5 mm	
NK22TBC0606	6 mm	
NK22TBC0808	8 mm	
NK22TBC1010	10 mm	

Hose Reducer

MILIERINA

CODE	SIZE	PRICE
NK22TBR0604	6 x 4 mm	
NK22TBR0605	6 x 5 mm	
NK22TBR0805	8 x 5 mm	
NK22TBR0806	8 x 6 mm	
NK22TBR1008	10 x 8 mm	
NK22TBR1208	12 x 8 mm	
NK22TBR1210	12 x 10 mm	

Hose Tee



CODE	SIZE	PRICE
NK22TBT0404	4 mm	
NK22TBT0505	5 mm	
NK22TBT0606	6 mm	
NK22TBT0808	8 mm	
NK22TBT1010	10 mm	

SIZE

4 mm

6 mm

8 mm

10 mm

Union Y Hose Conn.



Female Coupling



CODE	BSP (Fm)	PRICE
NK22TTC1	1⁄8"	
NK22TTC2	1⁄4"	
NK22TTC3	3/8"	
NK22TTC4	1/2"	

Bushing



CODE	BSP (M x Fm)	PRICE
NK22TTB21	1⁄4" × 1⁄8"	
NK22TTB32	3⁄8" × 1⁄4"	
NK22TTB42	½" x ¼"	
NK22TTB43	½" x ¾"	
NK22TTB62	1/4" x 3/4"	
NK22TTB63	3/8" × 3/4"	
NK22TTB64	½" x ¾"	

Hose Elbow

916	

CODE	SIZE	PRICE
NK22TBE0404	4 mm	
NK22TBE0505	5 mm	
NK22TBE0606	6 mm	
NK22TBE0808	8 mm	
NK22TBE1010	10 mm	

Hose Connector BSP(M)



CODE	SIZE	PRICE
NK22BM041	4 mm x 1/8"	
NK22BM042	4 mm x ¼"	
NK22BM051	5 mm x 1/8"	
NK22BM052	5 mm x ¼"	
NK22BM061	6 mm x 1/8"	
NK22BM062	6 mm x ¼"	
NK22BM064	6 mm x ½"	
NK22BM081	8 mm x 1/8"	
NK22BM082	8 mm x 1/4"	
NK22BM084	8 mm x ½"	
NK22BM102	10 mm x ¼"	
NK22BM103	10 mm x ¾"	
NK22BM104	10 mm x ½"	

Hose Elbow BSP(M)



CODE	SIZE	PRICE
NK22BG041	4 mm x 1/8"	
NK22BG051	5 mm x 1/8"	
NK22BG052	5 mm x ¼"	
NK22BG061	6 mm x 1/8"	
NK22BG062	6 mm x ¼"	
NK22BG081	8 mm x 1/8"	
NK22BG082	8 mm x ¼"	
NK22BG083	8 mm x ¾"	
NK22BG084	8 mm x ½"	
NK22BG102	10 mm x ¼"	
NK22BG103	10 mm x ¾"	
NK22BG104	10 mm x ½"	

HDPE Pipe

PRICE



Colour: Black (other colours to order) Max. Working Pressure: 16 BAR (235 psi) Pipe sizes are OD, use 4mm fitting for 6mm pipe

CODE	SIZE O.D.	PRICE
NK22TPIP2	1/4"	
NK22TPIP6	6 mm	
NK22TPIP8	8 mm	

NUT LOCK FITTINGS

Coupling



fax: 01772 815417

pe	End	
~		
	pe	pe End



CODE	DESCRIPTION	PRICE
MANNCO16	16 x 16 Coupling	
MANNCO20	20 x 20 Coupling	
MANNCO25	25 x 25 Coupling	

Adaptor BSP(M)



CODE	DESCRIPTION	PRICE
MANNA16075M	16mm x ¾" BSP(M) Adaptor	
MANNA20075M	20mm x ¾" BSP(M) Adaptor	
MANNA25100M	25mm x 1″BSP(M) Adaptor	

Adaptor BSP(F)



CODE	DESCRIPTION	PRICE
MANNA16075F	16mm x ¾" BSP(F) Adaptor	
MANNA20075F	20mm x ¾" BSP(F) Adaptor	
MANNA25100F	25mm x 1" BSP(F) Adaptor	

Tee



CODE	DESCRIPTION	PRICE
MANNT16	16mm Tee	
MANNT20	20mm Tee	
MANNT25	25mm Tee	

Elbow



CODE	DESCRIPTION	PRICE
MANNE16	16mm Elbow	
MANNE20	20mm Elbow	
MANNE25	25mm Elbow	

CODE	DESCRIPTION	PRICE
MANNPE16	16mm Pipe End	
MANNPE20	20mm Pipe End	
MANNPE25	25mm Pipe End	

Elbow BSP(M)



CODE	DESCRIPTION	PRICE
MANNE16050M	16mm x ½" BSP(M) Elbow	
MANNE16075M	16mm x ¾" BSP(M) Elbow	
MANNE20050M	20mm x ½" BSP(M) Elbow	
MANNE20075M	20mm x ¾" BSP(M) Elbow	

Valve



CODE	DESCRIPTION	PRICE
MANNV16	16mm Valve	
MANNV20	20mm Valve	

Valve BSP(M)



CODE	DESCRIPTION	PRICE
MANNV16050M	16mm x ½:" BSP(M) Valve	
MANNV16075M	16mm x ¾" BSP(M) Valve	
MANNV20075M	20mm x ¾" BSP(M) Valve	

Nut



Grip



CODE	SIZE	PRICE
MANNN16	16mm	
MANNN20	20mm	
MANNN25	25mm	

CODE	SIZE	PRICE
MANNG16	16mm	
MANNG20	20mm	
MANNG25	25mm	

MANIFOLD SYSTEM FITTINGS



Nipple with 'O' Ring

CODE	BSP	BAR	PRICE
MANNIP1	1" x 1"	10	
MANNIP2	1" x ¾"	10	

Swivel Manifold [MxFm]



CODE	BSP(MxFm)	BAR	PRICE
MANSMA2	1"3 outlet	10	
MANSMA3	1"4 outlet	10	
MANSMA4	1″5 outlet	10	

Swivel Adaptor [MxFm]

CODE	BSP(M)	BSP(Fm)	BAR	PRICE
MANSAD3	1″	1″	10	



Swivel Coupling [BSP(Fm)]

CODE	BSP(Fm)	BAR	PRICE
MANSCO1	1"	10	



Swivel Cross

CODE	SIZE	BAR	PRICE
MANSCR1	1"(3xFm) x 1"(M)	10	



Swivel Elbow [BSP(Fm)]

CODE	BSP(Fm)	BAR	PRICE
MANSEL2F	1" x 1"	10	



Swivel Elbow [BSP(FmxM)]

CODE	BSP(Fm)	BSP(M)	BAR	PRICE
MANSEL2FM	1″	1″	10	



Swivel Tee [BSP(FmxM)]

CODE	SIZE	BAR	PRICE
MANSTE1	1"(2xFm) x 1"(M)	10	

Manifold Filter Valve

This new valve combines either a solenoid valve or a pressure regulating valve with a screen filter as a single unit.





CODE	DESCRIPTION	PRICE
MANFV	1" Manifold Solenoid Valve c/w Filter 24v AC	

HANSEN FITTINGS

High Quality Glass Reinforced **Nylon Fittings**



- Manufactured from a raw material approved for use with potable drinking water.
- WRAS approved.
- Sizes up to 2'' (50mm) diameter rated to 16 bar pressure, larger sizes 10 bar.
- Precision heavy duty tapered (barrel) threads give a strong reliable seal.

Socket [BSP(Fm)]



CODE	BSP(Fm)	BAR	PRICE
HANSS050	1/2"	16	
HANSS075	3/4"	16	
HANSS100	1″	16	
HANSS125	11⁄4″	16	
HANSS150	1½"	16	
HANSS200	2"	16	
HANSS300	3″	10	
HANSS400	4"	10	

Tee [BSP(Fm)]



CODE	BSP(Fm)	BAR	PRICE
HANST050	1/2"	16	
HANST075	3/4"	16	
HANST100	1″	16	
HANST125	11⁄4″	16	
HANST150	11/2"	16	
HANST200	2"	16	
HANST300	3″	10	
HANST400	4"	10	·

Cap [BSP(Fm)]



CODE	BSP(Fm)	BAR	PRICE
HANSC050	1/2"	16	
HANSC075	3/4"	16	
HANSC100	1″	16	
HANSC125	11/4"	16	
HANSC150	11/2"	16	
HANSC200	2"	16	
HANSC300	3″	10	
HANSC400	4"	10	

Plua [BSP(M)]



CODE	BSP(M)	BAR	PRICE		
HANSP050	1/2"	16			
HANSP075	3/4"	16			
HANSP100	1″	16			
HANSP125	11⁄4″	16			
HANSP150	11/2"	16			
HANSP200	2"	16			
HANSP300	3″	10			
HANSP400	4"	10			

Hose Adaptor [BSP(M)]



CODE	Ø mm	BSP(M)	PRICE
HANSMHT050	15	1/2"	
HANSMHT075	20	3/4"	
HANSMHT100	25	1″	
HANSMHT125	32	11⁄4″	
HANSMHT150	40	1½"	
HANSMHT200	50	2″	
HANSMHT300	75	3″	

Hose Adaptor [BSP(Fm)]



ı	CODE	Ø mm	BSP(Fm)	PRICE
	HANSNT050	15	1/2"	
	HANSNT075	20	3/4"	
	HANSNT100	25	1″	
	HANSNT125	32	11⁄4″	
	HANSNT150	40	1½″	
	HANSNT200	50	2″	
	HANSNT300	75	3″	

Elbow [BSP(Fm)]



CODE	BSP(Fm)	BAR	PRICE
HANSE050	1/2"	16	
HANSE075	3/4"	16	
HANSE100	1″	16	
HANSE125	11⁄4″	16	
HANSE150	1½″	16	
HANSE200	2″	16	
HANSE300	3″	10	
HANSE400	4"	10	

Elbow [BSP(MxFm)]



CODE	BSP(MxFm)	BAR	PRICE
HANSMFE050	1/2"	16	
HANSMFE075	3/4"	16	
HANSMFE100	1"	16	
HANSMFE125	1¼″	16	
HANSMFE150	1½″	16	
HANSMFE200	2"	16	

Barrel Union [BSP(Fm)]



BSP(Fm)	BAR	PRICE
1/2"	16	
3/4"	16	
1″	16	
11⁄4″	16	
11/2"	16	
2"	16	
	1/2" 3/4" 1" 11/4" 11/2"	34" 16 1" 16 1½" 16 1½" 16

Hex Nipple [BSP(M)]



• •			
CODE	BSP(M)	BAR	PRICE
HANSHN050	1/2"	16	
HANSHN075	3/4"	16	
HANSHN100	1″	16	
HANSHN125	11⁄4″	16	
HANSHN150	1½"	16	
HANSHN200	2″	16	
HANSHN300	3″	10	
HANSHN400	4"	10	

HANSEN FITTINGS

Reducing Socket [BSP(Fm)]



Reducing	Bush	[BSP	(MxFm))]
----------	------	------	--------	----





CODE	BSP(Fm)	BSP(Fm)	BAR	PRICE
HANSRS075050	3/4"	1/2"	16	
HANSRS100075	1″	3/4"	16	
HANSRS125100	11⁄4″	1″	16	
HANSRS150100	1½″	1″	16	
HANSRS150125	1½"	11/4"	16	
HANSRS200100	2″	1″	16	
HANSRS200150	2"	1½″	16	
HANSRS300200	3″	2″	10	
HANSRS400300	4"	3″	10	

Reducing Nipple [BSP(M)]



CODE	BSP(M)	BSP(M)	BAR	PRICE
HANSRHN075050	3/4"	1/2"	16	
HANSRHN100050	1″	1/2"	16	
HANSRHN100075	1″	3/4"	16	
HANSRHN125100	11⁄4″	1"	16	
HANSRHN150100	1½"	1″	16	
HANSRHN150125	1½″	11⁄4″	16	
HANSRHN200100	2″	1″	16	
HANSRHN200150	2″	11/2"	16	
HANSRHN300200	3″	2″	10	
HANSRHN400300	4"	3″	10	

Tank Outlet [BSP(MxFm)] (with two washers)



CODE	BSP(M)	BSP(Fm)	BAR	PRICE
HANSFTF050	1/2"	1/2"	16	
HANSFTF075	3/4"	3/4"	16	
HANSFTF100	1″	1″	16	
HANSFTF125	11⁄4″	11⁄4″	16	
HANSFTF150	1½″	1½"	16	
HANSFTF200	2″	2"	16	
HANSFTF300	3″	3″	10	
HANSFTF400	4"	4"	10	

CODE	BSP(M)	BSP(Fm)	BAR	PRICE
HANSRB050025	1/2"	1/4"	16	
HANSRB075050	3/4"	1/2"	16	
HANSRB100050	1″	1/2"	16	
HANSRB100075	1″	3/4"	16	
HANSRB125100	11⁄4″	1″	16	
HANSRB150075	1½"	3/4"	16	
HANSRB150100	1½″	1″	16	
HANSRB150125	1½″	1¼″	16	
HANSRB200100	2″	1″	16	
HANSRB200150	2″	1½″	16	
HANSRB300200	3″	2"	10	
HANSRB400300	4"	3"	10	

Lever Ball Valve [BSP(Fm)]

Body/Handle: **GF Reinforced Nylon** Ball: Polypropylene Ball Seat: Acetal O Rings: Nitrile Rubber Max. Temperature: 60°C



CODE	BSP(Fm)	BAR	PRICE
HANHBV050	1/2"	16	
HANHBV075	3/4"	16	
HANHBV100	1"	16	
HANHBV125	11/4"	16	
HANHBV150	1½″	16	
HANHBV200	2"	16	

Check Valve [BSP(Fm)]



CODE	BSP(Fm)	BAR	PRICE
HANHCV100	1"	16	
HANHCV125	1¼"	16	
HANHCV150	1½″	16	
HANHCV200	2"	16	

Foot Valve [BSP(Fm)]



CODE	BSP(Fm)	BAR	PRICE
HANHFV100	1"	16	
HANHFV125	11⁄4″	16	
HANHFV150	1½″	16	
HANHFV200	2"	16	

PVC RAINWATER PIPE & FITTINGS

PVC Rainwater Pipe Class SN2 With Rubber Sealing Ring, 5m Lengths



CODE	O.D. x Wall Thickness	PRICE PER M
RARP51110	110 x 2.2mm	
RARP51125	125 x 2.5mm	
RARP51160	160 x 3.2mm	
RARP51200	200 x 4.0mm	
RARP51250	250 x 4.9mm	
RARP51315	315 x 6.2mm	

	CODE	SIZE	PRICE		
Bend (Rubber Ring	Bend (Rubber Ring) 15° FxF				
	RARB15110FF	110mm			
	RARB15125FF	125mm			
	RARB15160FF	160mm			
	RARB15250FF	250mm			
Bend (Rubber Ring	g) 45° FxF				
	RARB45110FF	110mm			
	RARB45125FF	125mm			
	RARB45160FF	160mm			
	RARB45200FF	200mm			
	RARB45250FF	250mm			
	RARB45315FF	315mm			
Bend (Rubber Ring	g) 88° FxF				
	RARB90110FF	110mm			
	RARB90125FF	125mm			
100	RARB90160FF	160mm			
	RARB90200FF	200mm			
	RARB90250FF	250mm			
	RARB90315FF	315mm			
Socket (Rubber Ri	ng) FxF				
	RARS110FF	110mm			
	RARS125FF	125mm			
	RARS160FF	160mm			
	RARS200FF	200mm			
	RARS250FF	250mm			
	RARS315FF	315mm			
	RARS400FF	400mm			
Reducing Bush Exc	centric (Rubber R	ing) MxF			
	RARSR125110MF	125 x 110mm			
	RARSR160110MF	160 x 110mm			
	RARSR160125MF	160 x 125mm			
	RARSR200125MF	200 x 125mm			
	RARSR200160MF	200 x 160mm			
	RARSR250200MF	250 x 200mm			
	RARSR315200MF	315 x 200mm			
	RARSR400250MF	400 x 250mm			
	RARSR400315MF	400 x 315mm			



	CODE	SIZE	PRICE
Solvent Cap	<u> </u>		
Joivent Cap	RAGC110	110mm	
	RAGC125	125mm	
	RAGC160	160mm	
	RAGC200	200mm	
	RAGC250	250mm	
	RAGC315	315mm	
	RAGC400	400mm	
Tee (Rubber Ring)			
ree (nabber ning)	RART45110FFF	110mm	
A	RART45125FFF	125mm	
	RART45160FFF	160mm	
	RART45200FFF	200mm	
	RART45250FFF	250mm	
	RART45315FFF	315mm	
Tee (Rubber Ring)			
ree (nabber milg)	RART90110FFF	110mm	
	RART90125FFF	125mm	
	RART90160FFF	160mm	
	RART90200FFF	200mm	
The second second	RART90250FFF	250mm	
	RART90315FFF	315mm	
	RART90400FFF	400mm	
Reducing Tee (Rub	ber Ring) 90° 3xF	-	
	RARTR90125110FFF	125 x 110mm	
	RARTR90160110FFF	160 x 110mm	
	RARTR90160125FFF	160 x 125mm	
	RARTR90200110FFF	200 x 110mm	
	RARTR90200125FFF	200 x 125mm	
THE RESERVE OF THE PARTY OF	RARTR90200160FFF	200 x 160mm	
	RARTR90250125FFF	250 x 125mm	
	RARTR90250160FFF	250 x 160mm	
	RARTR90250200FFF	250 x 200mm	
	RARTR90315200FFF	315 x 200mm	

GALVANISED METAL THREADED FITTINGS



Bend 90° [BSP(MxFm)]

CODE	SIZE	PRICE
METGB050MF	1/2"	
METGB075MF	3/4"	
METGB100MF	1″	
METGB150MF	1½″	
METGB200MF	2"	



Elbow 45° [BSP(Fm)]

CODE	SIZE	PRICE
METGE4100	1″	
METGE4200	2"	
METGE4300	3"	



Bend 90° [BSP(Fm)]

CODE	SIZE	PRICE
METGB050	1/2"	
METGB075	3/4"	
METGB100	1″	
METGB125	11⁄4″	
METGB150	11/2"	
METGB200	2"	



Elbow 45° [BSP(MxFm)]

CODE	SIZE	PRICE
METGE4050MF	1/2"	
METGE4100MF	1″	



Elbow 90° [BSP(Fm)]

CODE	SIZE	PRICE
METGE9025	1/4"	
METGE9050	1/2"	
METGE9075	3/4"	
METGE9100	1″	
METGE9125	11⁄4″	
METGE9150	1½"	
METGE9200	2"	
METGE9300	3"	
METGE9400	4"	



Nipple [BSP(M)]

CODE	SIZE	PRICE
METGN025	1/4"	
METGN038	3/8"	
METGN050	1/2"	
METGN075	3/4"	
METGN100	1"	
METGN125	1¼″	
METGN150	1½″	
METGN200	2"	
METGN250	2½″	
METGN300	3"	
METGN400	4"	
	METGN025 METGN038 METGN050 METGN075 METGN100 METGN125 METGN150 METGN200 METGN200 METGN250 METGN300	METGN025 METGN038 METGN050 ½" METGN075 METGN100 1" METGN125 METGN150 1½" METGN200 2" METGN250 METGN200 3"



Elbow 90° [BSP(MxFm)]

CODE	SIZE	PRICE
METGE9025MF	1/4"	
METGE9038MF	3/8"	
METGE9050MF	1/2"	
METGE9075MF	3/4"	
METGE9100MF	1″	
METGE9125MF	11⁄4″	
METGE9150MF	1½″	
METGE9200MF	2"	
METGE9300MF	3"	



Reducing Nipple [BSP(M)]

CODE	SIZE	PRICE
METGRN038025	3⁄8″ x 1⁄4″	
METGRN050025	½″ x ¼″	
METGRN050038	½" x ¾8"	
METGRN075050	³⁄4″ x ¹⁄2″	
METGRN100050	1" x ½"	
METGRN100075	1" x ¾"	
METGRN125075	11/4" x 3/4"	
METGRN125100	1¼″x 1″	
METGRN150075	1½" x ¾"	
METGRN150100	1½" x 1"	
METGRN150125	1½″x 1¼″	
METGRN200100	2" x 1"	
METGRN200125	2" x 1¼"	
METGRN200150	2″ x 1½″	
METGRN250200	2½" x 2"	
METGRN300200	3" x 2"	
METGRN300250	3" x 2½"	
METGRN400300	4" x 3"	



GALVANISED METAL THREADED FITTINGS



Cross [BSP(Fm)]

CODE	SIZE	PRICE
METGX050	1/2"	
METGX075	3/4"	
METGX100	1"	
METGX125	1¼″	
METGX150	1½"	
METGX200	2"	



Socket [BSP(Fm)]

CODE	SIZE	PRICE
METGS025	1/4"	
METGS038	3/8"	
METGS050	1/2"	
METGS075	3/4"	
METGS100	1"	
METGS125	1¼″	
METGS150	1½″	
METGS200	2"	
METGS300	3"	
METGS400	4"	



Reducing Bush [BSP(MxFm)]

rteadening basir [bsi (Mixi III)]		
CODE	SIZE	PRICE
METGRB038025	3⁄8″ x 1⁄4″	
METGRB050025	½" x ¼"	
METGRB050038	½" x ¾"	
METGRB075025	3/4" x 1/4"	
METGRB075038	3/4" x 3/8"	
METGRB075050	3/4" x 1/2"	
METGRB100038	1" x ¾"	
METGRB100050	1" x ½"	
METGRB100075	1" x ¾"	
METGRB125050	11/4" x 1/2"	
METGRB125075	11/4" x 3/4"	
METGRB125100	1¼"x 1"	
METGRB150050	1½" x ½"	
METGRB150075	1½" x ¾"	
METGRB150100	1½" x 1"	
METGRB150125	1½" x 1¼"	
METGRB200050	2" x ½"	
METGRB200100	2" x 1"	
METGRB200125	2" x 1¼"	
METGRB200150	2" x 1½"	
METGRB250200	2½" x 2"	
METGRB300150	3" x 1½"	
METGRB300200	3" x 2"	
METGRB300250	3" x 2½"	
METGRB400200	4" x 2"	
METGRB400300	4" x 3"	



Reducing Socket [BSP(Fm)]

CODE	SIZE	PRICE
METGRS050025	½" x ¼"	
METGRS075050	³⁄4″ x ¹⁄2″	
METGRS100050	1" x ½"	
METGRS100075	1" x ¾"	
METGRS125100	1¼" x 1"	
METGRS150075	1½" x ¾"	
METGRS150100	1½″ x 1″	
METGRS150125	1½" x 1¼"	
METGRS200100	2" x 1"	
METGRS200125	2" x 1¼"	
METGRS200150	2" x 1½"	
METGRS300150	3″ x 1½″	
METGRS300200	3" x 2"	
METGRS400300	4" x 3"	



Plug [BSP(M)]

- .	· -	
CODE	SIZE	PRICE
METGP025	1/4"	
METGP038	3/8"	
METGP050	1/2"	
METGP075	3/4"	
METGP100	1"	
METGP125	11⁄4″	
METGP150	11/2"	
METGP200	2"	



Cap [BSP(Fm)]

CODE	SIZE	PRICE
METGC025	1/4"	
METGC050	1/2"	
METGC075	3/4"	
METGC100	1″	
METGC125	1¼"	
METGC150	1½″	
METGC200	2"	
METGC300	3"	



Backnut [BSP(Fm)]

CODE	SIZE	PRICE
METGBN075	3/4"	
METGBN100	1″	
METGBN150	1½"	
METGBN200	2"	

GALVANISED METAL THREADED FITTINGS



Tee 90° [BSP(Fm)]

CODE	SIZE	PRICE
METGT025	1/4"	
METGT038	3/8"	
METGT050	1/2"	
METGT075	3/4"	
METGT100	1″	
METGT125	11⁄4″	
METGT150	11/2"	
METGT200	2"	
METGT250	21/2"	
METGT300	3"	
METGT400	4"	



Union [BSP(Fm)]

CODE	SIZE	PRICE
METGU050	1/2"	
METGU075	3/4"	
METGU100	1″	
METGU125	11⁄4″	
METGU150	1½"	
METGU200	2"	
METGU300	3"	



Reducing Tee 90° [BSP(Fm)]

CODE	SIZE	PRICE
METGRT075050	3/4" x 1/2"	
METGRT100050	1" x ½"	
METGRT100075	1" x ¾"	
METGRT150075	1½" x ¾"	
METGRT150100	1½" x 1"	
METGRT150200	1½" x 2"	
METGRT200050	2" x ½"	
METGRT200100	2" x 1"	
METGRT200150	2" x 1½"	
METGRT300150	3" x 1½"	
METGRT300200	3" x 2"	



Union [BSP(MxFm)]

CODE	SIZE	PRICE
METGU050MF	1/2"	
METGU075MF	3/4"	
METGU100MF	1"	
METGU125MF	1¼"	
METGU150MF	11/2"	
METGU200MF	2"	
METGU300MF	3"	

EPDM Rubber Lined Pipe Fixings

- EPDM rubber insulation for sound reduction compliant with DIN 4109
- M6 multifunction screw c/w retaining washer
- Electro zinc plated



P.T.F.E.

Heldite

Can be used on all materials; steel, copper, plastic etc.


Neccessary to prevent drips. Works with diesel, oil and water on all materials; steel, copper, plastic etc.

We recommend all external threads be wrapped twice round with PTFE tape then painted with thin coating of Heldite jointing compound.



We can also supply plain steel and
galvanised threaded pipe as required
Please ask for prices.

CODE	DESCRIPTION	SIZE	PRICE
SEAH250	Heldite	250ml	
PTFE	PTFE Tape	½″ x 12m x 0.75	

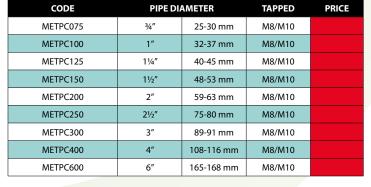

Pipe Clip Back Plate 10mm



CODE	THREADED	PRICE
METPCBP10	M10	

Threaded Rod

CODE	LENGTH	THR.	PRICE
METSBM10	1m	M10	
METSBM16	1m	M16	

CAM & GROOVE POLYPROPYLENE QUICK COUPLINGS

Female Coupler Polyprop





Hose Tail
Polyprop









CODE	BSP	BAR	PRICE
CAMD12PP	1/2"	16	
CAMD34PP	3/4"	16	
CAMD1PP	1"	16	
CAMD114PP	11/4"	16	
CAMD112PP	1½″	16	
CAMD2PP	2"	16	
CAMD3PP	3″	10	
CAMD4PP	4"	10	

CODE	BSP	BAR	PRICE
CAMB12PP	1/2"	16	
CAMB34PP	3/4"	16	
CAMB1PP	1″	16	
CAMB114PP	11⁄4″	16	
CAMB112PP	1½″	16	
CAMB2PP	2"	16	
CAMB3PP	3″	8	

CODE	I.D.	BAR	PRICE
CAMC12PP	1/2"	16	
CAMC34PP	3/4"	16	
CAMC1PP	1″	16	
CAMC114PP	1¼"	16	
CAMC112PP	1½″	16	
CAMC2PP	2"	16	
CAMC3PP	3″	10	
CAMC4PP	4"	10	

CODE	HOSE O.D.	PRICE
CAME12PP	1/2"	
CAME34PP	3/4"	
CAME1PP	1″	
CAME114PP	1¼″	
CAME112PP	1½″	
CAME2PP	2"	
CAME3PP	3″	
CAME4PP	4"	

Female Plug



Male Plug Polyprop



Dust	Plug
Polypro	р





Lever Stop

CODE	BSP	BAR	PRICE
CAMA12PP	1/2"	16	
CAMA34PP	3/4"	16	
CAMA1PP	1″	16	
CAMA114PP	1¼"	16	
CAMA112PP	1½″	16	
CAMA2PP	2"	16	
CAMA3PP	3″	8	
CAMA4PP	4"	8	

CODE	BSP	BAR	PRICE
CAMF12PP	1/2"	16	
CAMF34PP	3/4"	16	
CAMF1PP	1″	16	
CAMF114PP	11/4"	16	
CAMF112PP	1½″	16	
CAMF2PP	2″	16	
CAMF3PP	3″	10	
CAMF4PP	4"	10	

CODE BAR PRICE SIZE CAMDP34PP 3/4" 16 CAMDP1PP 1" 16 CAMDP114PP 11/4" 16 1½″ CAMDP112PP 16 CAMDP2PP 16 CAMDP3PP 10

CODE SIZE PRICE

CAMDC34PP 3/4"

CAMDC1PP 1"

CAMDC114PP 11/4"

CAMDC112PP 11/2"

CAMDC2PP 2"

CAMDC3PP 3"

Cam & Groove Seals Viton / EPDM / Buna



TO SUIT COUPLING	VITON	PRICE	EPDM	PRICE	BUNA	PRICE
1/2"	CAMVITON12		CAMEPDM12		CAMBUNA12	
3/4"	CAMVITON34		CAMEPDM34		CAMBUNA34	
1″	CAMVITON1		CAMEPDM1		CAMBUNA1	
1¼″	CAMVITON114		CAMEPDM114		CAMBUNA114	
1½″	CAMVITON112		CAMEPDM112		CAMBUNA112	
2"	CAMVITON2		CAMEPDM2		CAMBUNA2	
3″	CAMVITON3		CAMEPDM3		CAMBUNA3	
4"			CAMEPDM4		CAMBUNA4	

CAM & GROOVE ALUMINIUM QUICK COUPLINGS

Female Coupler

Hose Coupler

Male Coupler

Hose Tail









CODE	BSP	BAR	PRICE	CODE	I.D.	BAR	PRICE
CAMD12AU	1/2"	16		CAMC12AU	1/2"	16	
CAMD34AU	3/4"	16		CAMC34AU	3/4"	16	
CAMD1AU	1″	16		CAMC1AU	1″	16	
CAMD114AU	11/4"	16		CAMC114AU	11⁄4″	16	
CAMD112AU	1½″	10		CAMC112AU	1½"	10	
CAMD2AU	2"	10		CAMC2AU	2"	10	
CAMD3AU	3″	8		CAMC3AU	3"	8	
CAMD4AU	4"	8		CAMC4AU	4"	8	

	CODE	BSP	BAR	PRICE	CODE
	CAMB12AU	1/2"	16		CAME12
١	CAMB34AU	3/4"	16		CAME34
	CAMB1AU	1"	16		CAME1A
	CAMB114AU	11/4"	16		CAME114
	CAMB112AU	1½″	10		CAME112
	CAMB2AU	2"	10		CAME2A
	CAMB3AU	3″	8		CAME3A
	CAMB4AU	4"	8		CAME4A

E	CODE	HOSE O.D.	PRICE
	CAME12AU	1/2"	
	CAME34AU	3/4"	
	CAME1AU	1"	
	CAME114AU	1¼″	
	CAME112AU	1½″	
	CAME2AU	2"	
	CAME3AU	3″	
	CAME4AU	4"	

Female Plug

Dust Plug Aluminium



Lever Stop









CODE	BSP	BAR	PRICE	CODE	SIZE	BAR	PRICE
CAMA12AU	1/2"	16		CAMDP12AU	1/2"	16	
CAMA34AU	3/4"	16		CAMDP34AU	3/4"	16	
CAMA1AU	1″	16		CAMDP1AU	1″	16	
CAMA114AU	11/4"	16		CAMDP114AU	11/4"	16	
CAMA112AU	1½″	10		CAMDP112AU	1½″	16	
CAMA2AU	2"	10		CAMDP2AU	2"	16	
CAMA3AU	3″	8		CAMDP3AU	3″	8	
CAMA4AU	4"	8		CAMDP4AU	4"	5	

CODE	BSP	BAR	PRICE
CAMF12AU	1/2"	16	
CAMF34AU	3/4"	16	
CAMF1AU	1″	16	
CAMF114AU	1¼″	16	
CAMF112AU	1½″	10	
CAMF2AU	2″	10	
CAMF3AU	3″	8	
CAMF4AU	4"	8	

CODE	SIZE	PRICE
CAMDC34AU	3/4"	
CAMDC1AU	1″	
CAMDC114AU	11/4"	
CAMDC112AU	1½″	
CAMDC2AU	2″	
CAMDC3AU	3″	
CAMDC4AU	4"	

NOTES

1/2" SIZES ARE ONLY SUPPLIED WITH ONE LOCKING ARM

ALL 1/2" POLYPROPYLENE COUPLINGS AND PLUGS ARE 3/4" BODY SIZE

CAM & GROOVE QUICK COUPLINGS ALSO AVAILABLE IN BRASS OR STAINLESS STEEL

NPT THREADED COUPLINGS ALSO AVAILABLE

POLYPROP FITTINGS ARE NOT COMPATIBLE WITH ALUMINIUM FITTINGS

COMPRESSION FITTINGS 16 Bar

PRICE

Adaptor [BSP(M)]

CODE

ALP1616050M

ALP1616075M

ALP1620050M

ALP1620075M

ALP1620100M

ALP1625050M

ALP1625075M

ALP1625100M

ALP1632075M

ALP1632100M

ALP1632125M

ALP1640100M ALP1640125M

ALP1640150M

ALP1640200M

ALP1650125M

ALP1650150M

ALP1650200M

ALP1663125M

ALP1663150M

ALP1663200M

ALP1675250M

ALP1675300M

ALP1690200M

ALP1690300M

ALP16110300M



SIZE

16 x ½"

16 x ¾"

20 x ½"

20 x ¾"

20 x 1"

25 x ½"

25 x ¾"

25 x 1"

32 x ¾"

32 x 1"

32 x 11/4"

40 x 1"

40 x 11/4"

40 x 1½"

40 x 2"

50 x 1¼"

50 x 1½"

50 x 2"

63 x 1¼"

63 x 1½"

63 x 2"

75 x 2½"

75 x 3"

90 x 2"

90 x 3"

110 x 3"

Adaptor	[BSP(Fm)]
---------	-----------



CODE	SIZE	PRICE
ALP1616050F	16 x ½"	
ALP1616075F	16 x ¾"	
ALP1620050F	20 x ½"	
ALP1620075F	20 x ³ / ₄ "	
ALP1625050F	25 x ½"	
ALP1625075F	25 x ¾"	
ALP1625100F	25 x 1"	
ALP1632075F	32 x ¾"	
ALP1632100F	32 x 1"	
ALP1632125F	32 x 1¼"	
ALP1640100F	40 x 1"	
ALP1640125F	40 x 1¼"	
ALP1640150F	40 x 1½"	
ALP1650125F	50 x 1¼"	
ALP1650150F	50 x 1½"	
ALP1650200F	50 x 2"	
ALP1663150F	63 x 1½″	
ALP1663200F	63 x 2"	
ALP1675200F	75 x 2"	
ALP1675300F	75 x 3"	
ALP1690200F	90 x 2"	
ALP1690300F	90 x 3"	
ALP16110300F	110 x 3"	

Coupling



CODE	SIZE	PRICE
ALP16COU20	20 x 20	
ALP16COU25	25 x 25	
ALP16COU32	32 x 32	
ALP16COU40	40 x 40	
ALP16COU50	50 x 50	
ALP16COU63	63 x 63	
ALP16COU75	75 x 75	
ALP16COU90	90 x 90	
ALP16COU110	110 x 110	

Repair Coupling



CODE	SIZE	PRICE
ALP16RCO40	40 x 40	
ALP16RCO50	50 x 50	
ALP16RCO63	63 x 63	
ALP16RCO75	75 x 75	
ALP16RCO90	90 x 90	
ALP16RCO110	110 x 110	

Equal Tee 90°





CODE	SIZE	PRICE
ALP16ELB16	16	
ALP16ELB20	20	
ALP16ELB25	25	
ALP16ELB32	32	
ALP16ELB40	40	
ALP16ELB50	50	
ALP16ELB63	63	
ALP16ELB75	75	
ALP16ELB90	90	
ALP16ELB110	110	



CODE	SIZE	PRICE
ALP16TEE16	16	
ALP16TEE20	20	
ALP16TEE25	25	
ALP16TEE32	32	
ALP16TEE40	40	
ALP16TEE50	50	
ALP16TEE63	63	
ALP16TEE75	75	
ALP16TEE90	90	
ALP16TEE110	110	

Reducing Coupling



CODE	SIZE	PRICE
ALP16CRE2016	20 x 16	
ALP16CRE2520	25 x 20	
ALP16CRE3225	32 x 25	
ALP16CRE4025	40 x 25	
ALP16CRE4032	40 x 32	
ALP16CRE5032	50 x 32	
ALP16CRE5040	50 x 40	
ALP16CRE6332	63 x 32	
ALP16CRE6340	63 x 40	
ALP16CRE6350	63 x 50	
ALP16CRE7563	75 x 63	
ALP16CRE9063	90 x 63	
ALP16CRE9075	90 x 75	

COMPRESSION FITTINGS 16 Bar

Elbow 90° [BSP(M)]



CODE	SIZE	PRICE
ALP16ELB16050M	16 x ½"	
ALP16ELB20050M	20 x ½"	
ALP16ELB20075M	20 x ¾"	
ALP16ELB25050M	25 x ½″	
ALP16ELB25075M	25 x ¾"	
ALP16ELB25100M	25 x 1"	
ALP16ELB32075M	32 x ¾"	
ALP16ELB32100M	32 x 1"	
ALP16ELB40100M	40 x 1"	
ALP16ELB40125M	40 x 1¼″	
ALP16ELB40150M	40 x 1½"	
ALP16ELB50150M	50 x 1½″	
ALP16ELB50200M	50 x 2"	
ALP16ELB63150M	63 x 1½"	
ALP16ELB63200M	63 x 2"	

Reducing Tee 90°



	-			
CODE	SIZE	PRICE		
ALP16TRE2016	20 x 16			
ALP16TRE2520	25 x 20			
ALP16TRE3225	32 x 25			
ALP16TRE4032	40 x 32			
ALP16TRE5040	50 x 40			
ALP16TRE6350	63 x 50			
ALP16TRE7563	75 x 63			
	ALP16TRE2016 ALP16TRE2520 ALP16TRE3225 ALP16TRE4032 ALP16TRE5040 ALP16TRE6350	ALP16TRE2016 20 x 16 ALP16TRE2520 25 x 20 ALP16TRE3225 32 x 25 ALP16TRE4032 40 x 32 ALP16TRE5040 50 x 40 ALP16TRE6350 63 x 50		

Tee 90° Threaded Branch [BSP(M)]



CODE	SIZE	PRICE
ALP16TEE20050M	20 x ½″	
ALP16TEE20075M	20 x ¾"	
ALP16TEE25050M	25 x ½"	
ALP16TEE25075M	25 x ¾"	
ALP16TEE25100M	25 x 1"	
ALP16TEE32100M	32 x 1"	
ALP16TEE32125M	32 x 1¼″	
ALP16TEE40100M	40 x 1"	
ALP16TEE40125M	40 x 11/4"	
ALP16TEE50150M	50 x 1½"	
ALP16TEE63200M	63 x 2"	

Elbow 90° [BSP(Fm)]



CODE	SIZE	PRICE
ALP16ELB20050F	20 x ½"	
ALP16ELB20075F	20 x ¾"	
ALP16ELB25050F	25 x ½"	
ALP16ELB25075F	25 x ¾"	
ALP16ELB25100F	25 x 1"	
ALP16ELB32050F	32 x ½"	
ALP16ELB32075F	32 x ¾"	
ALP16ELB32100F	32 x 1"	
ALP16ELB32125F	32 x 1¼"	
ALP16ELB40100F	40 x 1"	
ALP16ELB40125F	40 x 1¼"	
ALP16ELB40150F	40 x 1½"	
ALP16ELB50150F	50 x 1½"	
ALP16ELB50200F	50 x 2"	
ALP16ELB63150F	63 x 1½″	
ALP16ELB63200F	63 x 2"	
ALP16ELB75250F	75 x 2½″	
ALP16ELB75300F	75 x 3"	
ALP16ELB90300F	90 x 3"	

Flanged Adaptor



CODE	SIZE	PRICE
ALP16FLA50150	50 x 1½″	
ALP16FLA63200	63 x 2"	
ALP16FLA75300	75 x 3″	
ALP16FLA90300	90 x 3"	
ALP16FLA110400	110 x 4"	



Tee 90° Threaded Branch [BSP(Fm)]



CODE	SIZE	PRICE
ALP16TEE16050F	16 x ½"	
ALP16TEE16075F	16 x ¾"	
ALP16TEE20050F	20 x ½"	
ALP16TEE20075F	20 x ¾"	
ALP16TEE25050F	25 x ½"	
ALP16TEE25075F	25 x ¾"	
ALP16TEE25100F	25 x 1"	
ALP16TEE32075F	32 x ¾"	
ALP16TEE32100F	32 x 1"	
ALP16TEE40100F	40 x 1"	
ALP16TEE40150F	40 x 1½"	
ALP16TEE50125F	50 x 1¼"	
ALP16TEE50150F	50 x 1½"	
ALP16TEE50200F	50 x 2"	
ALP16TEE63150F	63 x 1½"	
ALP16TEE63200F	63 x 2"	

End Cap



CODE	SIZE	PRICE
ALP16CAP20	20	
ALP16CAP25	25	
ALP16CAP32	32	
ALP16CAP40	40	
ALP16CAP50	50	
ALP16CAP63	63	
ALP16CAP75	75	
ALP16CAP90	90	

Wall Plate Elbow



CODE	SIZE	PRICE
ALP16WPE20050	20 x ½"	
ALP16WPE25075	25 x ¾"	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

PLASSON COMPRESSION FITTINGS 16 Bar

6005												
CODE		DESCRIPTION	16mm	20mm	25mm	32mm	40mm	50mm	63mm	75mm	90mm	110mm
PLA7010	1	Coupling										
		Reducing										
PLA7110		Coupling to mm	-	16	16, 20	20, 25	25, 32	25, 32, 40	25, 32, 40, 50	50, 63	63, 75	90
PLA7610		Repair Slip Coupling	-									
		Adaptor										
PLA7020		to BSP(M)	3/8", 1/2", 3/4"	½", ¾", 1"	1/2", 3/4", 1"	¾", 1", 1¼", 1½"	1″, 1¼″, 1½″, 2″	1", 1¼", 1½", 2"	1¼", 1½", 2", 2½"	2", 2½", 3"	2", 2½", 3", 4"	2", 3", 4"
		Adaptor										
PLA7030		to BSP(Fm)	1/2", 3/4"	1/2", 3/4", 1"	34", 1"	34", 1", 114"	1", 1¼", 1½"	1¼", 1½", 2″	2"	2", 2½"	2", 3", 4"	3″, 4″
PLA7050	3	Elbow 90°										
PLA7510		Reducing Elbow 90°	-	-		_	-	_	_	-	_	-
					20							
PLA7850		Elbow 90° to BSP(M)	-	V. H. 3 / H	1/// 2/// 4//	2//	4// 43/// 43///	211 23 11 23 11	41/// 41/// 21/		2//	All
				1/2", 3/4"	1/2", 3/4", 1"	1"	1", 1¼", 1½"	1", 1¼", 1½"	11/4". 11/2", 2"		3″	4"
PLA7150		Elbow 90° to BSP(Fm)	1/2"	1/2", 3/4"	½",¾",1"	34", 1", 114"	1", 11/4",	1", 1¼",	1¼", 1½", 2″	2", 2½", 3"	_	-
			·-	,	,,,,,	,.,	1½", 2"	1½″, 2″	,			
PLA7460		Elbow 45°	-	-	-							
		Elbow 45°										
PLA7450		to BSP(M)	-	1/2", 3/4"	-	-	-	-	-	-	-	-
PLA7040	-	Tee 90°										
	M	Reducing										
PLA7340		Tee 90° to mm	-	16	20	25	25, 32	25, 32, 40	32, 40, 50	63	-	-
DI ATE		Enlarging										
PLA7740	13	Tee 90° to mm	-	-	32	-	-	-	-	-	-	-
PLA7840		Tee 90° to BSP(M)	-	1/2", 3/4"	1/2", 3/4"	1"	11/4", 11/2"	1¼", 1½"	11/4", 11/2", 2"	_	-	-
		Tee 90°										
PLA7140	0 10	to BSP(Fm)	1/2", 3/4"	1/2", 3/4"	1/2", 3/4", 1", 11/4	¾", 1", 1¼", 1½"	1", 1¼", 1½", 2"	11/2", 2"	1¼", 1½", 2″	2", 2½", 3"	3″	4"
PLA7640	2	Tee 45°	-	-	-	-	-	-				
PLA7120	0	End Plug										

Water Fittings Approved by the UK Water Industry

Plasson Compression Adaptors & Universal Fittings [WRAS]




CODE		DESCRIPTION	20mm	25mm	32mm	40mm	50mm	63mm	75mm	110mm
PLA7786		Low Density Class C Adaptor							-	-
TEA7760		BS 1972 (Light Blue)	3/8", 1/2"	3/4"	1″		11/4", 11/2"	2″		
PLA7788	~0	High Density Class C Adaptor							-	-
1247700		BS 3284 (Dark Blue)	1/2"	3/4"	1″		11/4", 11/2"	2"		
PLA7787	O	Low Density Class D Adaptor						-	-	-
TEA/76/		BS1972 (Light Green)	1/2"	3/4"	1″		11/4", 11/2"			
PLA7789		High Density Class D Adaptor							-	-
1 ER/703		BS 3284 (Dark Green)	3/8", 1/2"	3/4"	1″		11/4", 11/2"	2"		
PLA1001c		PE x Copper/PB/PEX -					_	_		
	- Ø		15	15, 22	28					
PLA7950	4	Pipe Liner							-	_
		·								
PLA7129		Blanking Plug							_	_
	-0									
PLA7930	4 00	Reducing Set to mm	-							
		to mm		20	20, 25	32	25, 32, 40	25, 32, 50	63	63, 75, 90
PLA7418		Metric to Imperial Coupling							_	_
			3/8", 1/2"	3/8", 1/2", 3/4"	1″		11/4", 11/2	1½", 2″		
PLA7478		Metric to Imperial				_	_	-	_	_
		Elbow 90°	1/2"	1/2", 3/4"	1″					

REPAIR COUPLERS



Flo-Span

DIAMETER	PRICE
1″	
1¼″	
11/2"	
2"	
3"	
4"	
	1" 11/4" 11/2" 2" 3"





CODE	DIAMETER	PRICE
EVIF08RCCOM	1″	
EVIF09RCCOM	11⁄4″	
EVIF10RCCOM	1½″	
EVIF11RCCOM	2"	
EVIF13RCCOM	3"	
EV.IF14RCCOM	4"	

Viking Johnson MaxiFit Coupling

MaxiFit universal pipe couplings are designed to accommodate plain ended pipes with different outside diameters. One fitting is able to connect to a wide variety of pipe materials including steel, ductile iron, PVC, cast iron, GRP and asbestos cement pipes amongst others.

UNIQUE GASKET

With distinctive circumferential ribs providing a "slide easy' fit for maximum sealing on scored, corroded or pitted pipe.

EXCELLENT CORROSION & DAMAGE PROTECTION

Coated in black Rilsan Nylon 11 which is WRAS listed and has excellent resistance to impact, abrasion, weathering and chemicals. It also has good thermal stability and flexibility to accomodate for rough site handling.

SIMPLE INSTALLATION

Captive, non-rotating bolt heads require just a torque wrench to install.

Flared end to the sleeve forms a deep gasket chamber to give maximum possible pipe adjustment.

CODE	SIZE	PRICE
VJMXC200	2" (57-74mm)	
VJMXC250	2½" (63-85mm)	
VJMXC300	3" (85-107mm)	
VJMXC400	4" (107-132mm)	
VJMXC600	6" (158-184mm)	

PLASSON COMPRESSION ADAPTORS, UNIVERSAL **FITTINGS & VALVES 16 Bar**



Universal Fittings

Plass4® is the first fitting able to connect MDPE pipes to all metal pipe (Imperial and Metric Copper, Lead and Steel), and all plastic pipe (Imperial and Metric PE and uPVC) found in the UK (range 15-50mm).





PLA77057 Universal Elbow

PLA77017 Universal Coupling

FROM MDPE	TO Copper	PRICE
25mm	15-22mm	
25mm	20-27mm	
25mm	27-35mm	
32mm	20-27mm	
32mm	27-35mm	
50mm	35-50mm	

FROM MDPE	TO Copper	PRICE
25mm	15-22mm	
25mm	20-27mm	
25mm	27-35mm	

NOTE: Prices include Liner for MDPE

Plasson Wall Plate Elbows





PLA7750 Plastic

SIZE	BSP(Fm)	PRICE
20mm	1/2"	
25mm	3/4"	



SIZE	BSP(Fm)	PRICE
20mm	1/2"	
25mm	3/4"	

Plasson Accessories





PLA7990 Wrench

SIZE	PRICE
Plastic 16-40mm	
Metal 40-75mm	
Metal 63-125mm	



60126 20-63mm





PLA7960 Chamfer Tool

PLA7992 Universal Strap Wrench		PLA7960 Chamfer Tool	
SIZE	PRICE	SIZE	
20-90mm		20-63mm	

Plasson Valves



PLA3407 Stop Tap Above & **Below Ground BS5433 Type**

SIZE	PRICE
20mm	
25mm	
32mm	



www.lssystems.co.uk

PLA3405 Stop Tap Above Ground BS1010/2 Type

PRICE	BSP(Fm)	PRICE
	3/4"	
	1"	



PLA1379 Compression Ball Valve (PVC)

FROM MDPE	TO BSP(Fm)	PRICE
20mm	1/2"	
25mm	3/4"	
32mm	1″	
40mm	1¼″	
50mm	1½″	
63mm	2"	



PLA9056 Bib Tap Hose Union with **Double Check Valve**

PRICE

BSP(M)

1/5"

FROM MDPE	TO BSP(Fm)	PRICE	
20mm	1/2"		
25mm	3/4"		
32mm	1″		
40mm	11⁄4″		
50mm	1½″		
63mm	2"		



PLA9050 Universal Stop Tap DZR BS 5433/1010 Type

	SIZE	PRICE
	20mm	
	25mm	
\ \	32mm	

PLA9053 Below Ground Gun Metal Stop Tap BS 5433 (BSP(Fm)

BSP(Fm)	PRICE
1/2"	
3/4″	
1"	
11/2"	
2"	



PLA3039 Quick Coupling Valve (Nitrile Rubber O-Ring)

SIZE	PRICE
3/4"	
1"	



PLA3139 Key for Quick Coupling Valve (3039)

SIZE	PRICE
3/4"	

PVC SADDLES

Saddles 10 Bar (above ground only)



Plasson Saddles 16 Bar

With Reinforcing Ring, Stainless Bolts Can be used below ground.



CODE	Ø mm	BSP(Fm)	PRICE
PLG10025050	25	1/2"	
PLG10025075	25	3/4"	
PLG10032050	32	1/2"	
PLG10032075	32	3/4"	
PLG10040050	40	1/2"	
PLG10040075	40	3/4"	
PLG10040100	40	1″	
PLG10050050	50	1/2"	
PLG10050075	50	3/4"	
PLG10050100	50	1″	
PLG10063050	63	1/2"	
PLG10063075	63	3/4"	
PLG10063100	63	1″	
PLG10075050	75	1/2"	
PLG10075075	75	3/4"	
PLG10075100	75	1″	
PLG10075125	75	11/4"	
PLG10075150	75	1½″	
PLG10090075	90	3/4"	
PLG10090100	90	1″	
PLG10090125	90	1¼"	
PLG10090150	90	11/2″	
PLG10090200	90	2"	
PLG10110150	110	11/2"	
PLG10110200	110	2"	
PLG10110300	110	3"	
PLG10125100	125	1"	

CODE Ø mm BSP(Fm) PRICE PLA16076020050 20 ½" PLA16076025050 25 ½" PLA16076025075 25 ½" PLA16076032050 32 ½" PLA16076032050 32 ½" PLA16076032100 32 1" PLA16076040050 40 ½" PLA16076040075 40 ¾" PLA16076040075 40 ¾" PLA16076040075 40 ¾" PLA16076050050 50 ½" PLA16076050050 50 ½" PLA16076050050 50 ½" PLA16076050050 50 ½" PLA160760500075 50 ¾" PLA16076050100 50 1" 1" PLA16076050105 50 1½" PLA16076050125 50 1½" PLA16076050125 50 1½" PLA16076050125 63 1½" PLA16076063105 63 1½" PLA16076063105 63 1½" PLA16076063105 63 1½" PLA16076063150 63 1½" PLA160760760505 75 ½" PLA16076075050 75 ½" PLA1607607				_
PLA16076025050 25 32 32 32 32 32 32 32 32 32 32 32 32 32	CODE	Ø mm	BSP(Fm)	PRICE
PLA16076025075 25 %" PLA16076032050 32 %" PLA16076032075 32 %" PLA16076032100 32 1" PLA16076032100 32 1" PLA160760400075 40 %" PLA16076040075 40 1" PLA16076050050 50 ½" PLA16076050050 50 ½" PLA16076050050 50 ½" PLA16076050075 50 3%" PLA16076050100 50 1" PLA16076050105 63 ½" PLA16076050105 63 ½" PLA16076050125 63 1½" PLA1607605125 63 1½" PLA1607605150 63 ½" PLA1607605150 75 ½" PLA16076075050 75 ½" PLA16076075150 75 1½" PLA16076075150 75 1½" PLA16076075050 90 ½" PLA16076090050 90 ½" PLA16076090050 90 ½" PLA16076090150 90 1½" PLA16076090150 110 1½" PLA16076110100 110 1" PLA16076110100 110 1½" PLA16076110100 110 1½" PLA16076110100 110 1½" PLA1607611025 110 1¼" PLA16076125150 125 1½" PLA1607612500 125 1½" PLA16076152500 125 1½" PLA16076152500 125 1½" PLA1607615500 160 1½"	PLA16076020050	20	1/2"	
PLA16076032050 32 32 32" PLA16076032075 32 32" PLA16076032100 32 11" PLA16076040050 40 7½" PLA16076040075 40 34" PLA16076040100 40 11" PLA16076050050 50 7½" PLA16076050075 50 11" PLA160760500100 50 11" PLA16076050125 50 11¼" PLA16076063050 63 7½" PLA16076063100 63 11" PLA16076063125 63 11½" PLA16076063150 63 11½" PLA16076063150 75 7½" PLA16076075155 75 34" PLA16076075155 75 1½" PLA16076075150 75 11" PLA16076075150 75 1½" PLA16076075150 75 1½" PLA16076075150 75 1½" PLA16076075150 75 1½" PLA16076090050 90 1½" PLA16076090050 90 1½" PLA16076090050 90 1½" PLA16076090150 90 1½" PLA16076110150 110 1½" PLA16076125150 125 1½" PLA1607615500 160 1½"	PLA16076025050	25	1/2"	
PLA16076032075 32 ¾" PLA16076032100 32 1" PLA16076040050 40 ½" PLA16076040075 40 ¾" PLA16076040100 40 1" PLA16076050050 50 ½" PLA16076050075 50 ¼" PLA16076050100 50 1" PLA16076050125 50 1¼" PLA16076063050 63 ½" PLA16076063050 63 ½" PLA16076063100 63 1" PLA16076063125 63 1¼" PLA16076063125 63 1¼" PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075125 75 1¼" PLA16076075126 75 1½" PLA16076075127 75 1¼" PLA16076075128 75 1¼" PLA16076090500 75 2" PLA16076090500	PLA16076025075	25	3/4"	
PLA16076032100 32 1" PLA16076040050 40 ½" PLA16076040075 40 ¾" PLA16076040100 40 1" PLA16076050050 50 ½" PLA16076050075 50 ¾" PLA16076050100 50 1" PLA16076050125 50 1¼" PLA16076050125 50 1¼" PLA16076063050 63 ½" PLA16076063100 63 1" PLA16076063125 63 1½" PLA16076075050 75 ½" PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075125 75 1½" PLA16076075100 75 1½" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090100 90 1" PLA16076090125 90 1½" PLA16076110050<	PLA16076032050	32	1/2"	
PLA16076040050 40 ½" PLA16076040075 40 ¾" PLA16076040100 40 1" PLA16076050050 50 ½" PLA16076050075 50 ¾" PLA16076050100 50 1" PLA16076050125 50 1¼" PLA16076063050 63 ½" PLA16076063100 63 1" PLA16076063150 63 1½" PLA16076075150 63 1½" PLA16076075050 75 ½" PLA16076075075 75 ½" PLA16076075050 75 ½" PLA16076075100 75 1" PLA16076075125 75 1½" PLA16076075120 75 1½" PLA16076075120 75 1½" PLA160760790120 75 1½" PLA16076090050 90 ½" PLA16076090050 90 1½" PLA16076090150 90 1½" PLA16076090	PLA16076032075	32	3/4"	
PLA16076040075 40 ¾" PLA16076040100 40 1" PLA16076050050 50 ½" PLA16076050075 50 ¾" PLA16076050100 50 1" PLA16076050125 50 1¼" PLA16076063050 63 ½" PLA16076063075 63 ¾" PLA16076063100 63 1" PLA16076063125 63 1½" PLA16076063150 63 1½" PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075125 75 1½" PLA16076075126 75 1½" PLA16076075200 75 2" PLA16076090050 90 ½" PLA160760901050 90 1½" PLA16076090100 90 1" PLA16076090125 90 1½" PLA16076101005 110 ½" PLA160761100	PLA16076032100	32	1″	
PLA16076040100 40 1" PLA16076050050 50 ½" PLA16076050075 50 ¾" PLA16076050100 50 1" PLA16076050125 50 1¼" PLA16076063050 63 ½" PLA16076063100 63 1" PLA16076063125 63 1¼" PLA16076063150 63 1½" PLA16076075050 75 ½" PLA16076075050 75 ½" PLA16076075100 75 1" PLA16076075125 75 1¼" PLA16076075150 75 1½" PLA16076075150 75 1½" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090075 90 34" PLA16076090125 90 11" PLA16076090125 90 1½" PLA16076090120 90 2" PLA1607610100 110 ½" PLA160761101	PLA16076040050	40	1/2"	
PLA16076050050 50 ½" PLA16076050075 50 ¾" PLA16076050100 50 1" PLA16076050125 50 1¼" PLA16076063050 63 ½" PLA16076063100 63 1" PLA16076063125 63 1½" PLA16076063150 63 1½" PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075150 75 1½" PLA16076075150 75 1½" PLA16076075150 75 1½" PLA16076075200 75 2" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090100 90 1" PLA16076090125 90 1½" PLA16076090150 90 1½" PLA16076101050 110 ½" PLA160761101050 110 1½" PLA160761	PLA16076040075	40	3/4"	
PLA16076050075 50 ¾" PLA16076050100 50 1" PLA16076050125 50 1¼" PLA16076063050 63 ½" PLA16076063100 63 1" PLA16076063125 63 1¼" PLA16076063150 63 1½" PLA16076075050 75 ½" PLA16076075050 75 ½" PLA16076075050 75 ½" PLA16076075100 75 1" PLA16076075100 75 1" PLA16076075150 75 1½" PLA16076075150 75 1½" PLA16076075200 75 2" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090100 90 1" PLA16076090125 90 1½" PLA16076090150 90 1½" PLA16076101050 110 ½" PLA160761101050 110 1½" PLA1607611	PLA16076040100	40	1"	
PLA16076050100 50 1" PLA16076050125 50 11/4" PLA16076063050 63 ½" PLA16076063075 63 ¼" PLA16076063120 63 11" PLA16076063125 63 11½" PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075125 75 11/4" PLA16076075126 75 11/2" PLA16076075127 75 11/2" PLA16076075128 75 11/2" PLA16076075129 75 2" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090100 90 1" PLA16076090125 90 1½" PLA16076090125 90 1½" PLA16076100105 110 ½" PLA16076110050 110 ½" PLA16076110105 110 1½" <	PLA16076050050	50	1/2"	
PLA16076050125 50 11¼" PLA16076063050 63 ½" PLA16076063075 63 ¾" PLA16076063100 63 1" PLA16076063125 63 11¼" PLA16076063150 63 11½" PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075125 75 1½" PLA16076075150 75 1½" PLA16076075150 75 1½" PLA16076075150 75 2" PLA1607609050 90 ½" PLA16076090050 90 ½" PLA16076090100 90 1" PLA16076090105 90 1½" PLA16076090150 90 2" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110100 110 1" PLA16076110150 110 1½" PLA16076	PLA16076050075	50	3/4"	
PLA16076063050 63 ½" PLA16076063075 63 ¾" PLA16076063100 63 1" PLA16076063125 63 1½" PLA16076063150 63 1½" PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075125 75 1¼" PLA16076075150 75 2" PLA16076075100 75 2" PLA16076075150 75 1½" PLA16076075100 75 2" PLA16076090000 90 ½" PLA16076090100 90 1" PLA16076090105 90 1½" PLA16076090200 90 2" PLA1607610050 110 ½" PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110200 110 2" PLA16076125100 125 1" PLA16076125	PLA16076050100	50	1"	
PLA16076063075 63 ¾" PLA16076063100 63 1" PLA16076063125 63 1½" PLA16076063150 63 1½" PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075125 75 1¼" PLA16076075150 75 1½" PLA16076075200 75 2" PLA1607609050 90 ½" PLA16076090050 90 ¾" PLA16076090100 90 1" PLA16076090125 90 1½" PLA16076090150 90 1½" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110105 110 1½" PLA16076110125 110 1½" PLA16076110120 110 1½" PLA16076125075 125 ¾" PLA16076125125 125 1½" PLA160	PLA16076050125	50	1¼″	
PLA16076063100 63 1" PLA16076063125 63 1¼" PLA16076063150 63 1½" PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075125 75 1¼" PLA16076075150 75 1½" PLA16076075150 75 2" PLA16076075200 75 2" PLA1607609050 90 ½" PLA16076090050 90 ½" PLA16076090100 90 1" PLA16076090125 90 1¼" PLA16076090150 90 1½" PLA16076090150 90 2" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 ½" PLA16076110100 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA1607612	PLA16076063050	63	1/2"	
PLA16076063125 63 1¼" PLA16076063150 63 1½" PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075125 75 1¼" PLA16076075150 75 1½" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090050 90 ½" PLA16076090075 90 ¾" PLA16076090100 90 1" PLA16076090125 90 1¼" PLA16076090150 90 1½" PLA16076090200 90 2" PLA1607610050 110 ½" PLA16076110050 110 1" PLA16076110100 110 1" PLA16076110100 110 1½" PLA16076110200 110 2" PLA16076125100 125 1" PLA16076125100 125 1½" PLA1607	PLA16076063075	63	3/4"	
PLA16076063150 63 1½" PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075125 75 1½" PLA16076075150 75 1½" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090075 90 ¾" PLA16076090100 90 1" PLA16076090125 90 1½" PLA16076090125 90 1½" PLA16076090100 90 2" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110105 110 1" PLA16076110125 110 1½" PLA16076110125 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1½" PLA16	PLA16076063100	63	1"	
PLA16076075050 75 ½" PLA16076075075 75 ¾" PLA16076075100 75 1" PLA16076075125 75 1½" PLA16076075150 75 1½" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090075 90 ¾" PLA16076090100 90 1" PLA16076090125 90 1¼" PLA16076090150 90 1½" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 ¾" PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125125 125 1½" PLA16076125120 125 1½" PLA16076125120 125 1½" PLA16076160100 160 1" PLA	PLA16076063125	63	1¼"	
PLA16076075075 75 34" PLA16076075100 75 1" PLA16076075125 75 11/4" PLA16076075150 75 11/2" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090075 90 34" PLA16076090100 90 1" PLA16076090125 90 11/4" PLA16076090150 90 11/2" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 34" PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110100 110 1½" PLA16076110200 110 2" PLA16076125075 125 34" PLA16076125125 125 1½" PLA16076125150 125 1½" PLA16076125100 125 2" PLA16076160100 160 1"	PLA16076063150	63	1½″	
PLA16076075100 75 1" PLA16076075125 75 1¼" PLA16076075150 75 1½" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090075 90 ¾" PLA16076090100 90 1" PLA16076090125 90 1½" PLA16076090150 90 1½" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 ¾" PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125120 125 1½" PLA16076125125 125 1½" PLA16076125120 125 1½" PLA16076160100 160 1" PLA16076160100 160 1½" <td< td=""><td>PLA16076075050</td><td>75</td><td>1/2"</td><td></td></td<>	PLA16076075050	75	1/2"	
PLA16076075125 75 11¼" PLA16076075150 75 11½" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090075 90 11″ PLA16076090100 90 11″ PLA16076090150 90 11½" PLA16076090150 90 1½" PLA16076090150 90 2" PLA16076110050 110 ½" PLA16076110050 110 11″ PLA16076110100 110 11″ PLA16076110150 110 1½" PLA16076110150 110 2" PLA1607611025 125 1½" PLA16076125100 125 1½ PLA16076125100 125 1½" PLA16076125100 125 2" PLA16076125100 125 1½" PLA16076160100 160 11″ PLA16076160100 160 1½"	PLA16076075075	75	3/4"	
PLA16076075150 75 1½" PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090075 90 ¾" PLA16076090100 90 1" PLA16076090125 90 1½" PLA16076090205 90 2" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 ¾" PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125150 125 1" PLA16076125150 125 1½" PLA16076125150 125 2" PLA16076160100 160 1" PLA16076160105 160 1½"	PLA16076075100	75	1"	
PLA16076075200 75 2" PLA16076090050 90 ½" PLA16076090075 90 ¾" PLA16076090100 90 1" PLA16076090125 90 1½" PLA16076090150 90 1½" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 34" PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125150 125 1½" PLA16076125150 125 1½" PLA16076160100 160 1" PLA16076160105 160 1½" PLA16076160150 160 1½"	PLA16076075125	75	1¼"	
PLA16076090050 90 ½" PLA16076090075 90 ¾" PLA16076090100 90 1" PLA16076090125 90 1¼" PLA16076090150 90 1½" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 1" PLA16076110100 110 1" PLA16076110125 110 1¼" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1½" PLA16076125120 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076075150	75	1½″	
PLA16076090075 90 ¾" PLA16076090100 90 1" PLA16076090125 90 1¼" PLA16076090150 90 1½" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 ¾" PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1½" PLA16076125120 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076075200	75	2"	
PLA16076090100 90 1" PLA16076090125 90 1½" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 3¼" PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 3¼" PLA16076125100 125 1" PLA16076125125 125 1½" PLA16076125120 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076090050	90	1/2"	
PLA16076090125 90 1¼" PLA16076090150 90 1½" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 1" PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1¼" PLA16076125150 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076090075	90	3/4″	
PLA16076090150 90 1½" PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 ¾" PLA16076110100 110 1" PLA16076110125 110 1¼" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1¼" PLA16076125150 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076090100	90	1"	
PLA16076090200 90 2" PLA16076110050 110 ½" PLA16076110075 110 ¾" PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1¼" PLA16076125150 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076090125	90	11⁄4″	
PLA16076110050 110 ½" PLA16076110075 110 ¾" PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1¼" PLA16076125150 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076090150	90	1½″	
PLA16076110075 110 ¾" PLA16076110100 110 1" PLA16076110125 110 1¼" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1¼" PLA16076125150 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076090200	90	2"	
PLA16076110100 110 1" PLA16076110125 110 1½" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1¼" PLA16076125150 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076110050	110	1/2"	
PLA16076110125 110 1¼" PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1¼" PLA16076125150 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076110075	110	3/4"	
PLA16076110150 110 1½" PLA16076110200 110 2" PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1¼" PLA16076125150 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076110100	110	1"	
PLA16076110200 110 2" PLA16076125075 125 3/4" PLA16076125100 125 1" PLA16076125125 125 11/4" PLA16076125150 125 11/2" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 11/4" PLA16076160150 160 11/2"	PLA16076110125	110	11⁄4″	
PLA16076125075 125 ¾" PLA16076125100 125 1" PLA16076125125 125 1¼" PLA16076125150 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076110150	110	11/2"	
PLA16076125100 125 1" PLA16076125125 125 11/4" PLA16076125150 125 11/2" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 11/4" PLA16076160150 160 11/2"	PLA16076110200	110	2"	
PLA16076125125 125 1¼" PLA16076125150 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076125075	125	3/4"	
PLA16076125150 125 1½" PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076125100	125	1"	
PLA16076125200 125 2" PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"	PLA16076125125			
PLA16076160100 160 1" PLA16076160125 160 1¼" PLA16076160150 160 1½"				
PLA16076160125 160 1½" PLA16076160150 160 1½"				
PLA16076160150 160 1½"			· ·	
PLA16076160200 160 2"				
	PLA16076160200	160	2"	

Twist Punch

holes for saddles. It can be used after the saddle has



CODE	DESCRIPTION	PRICE
NK883015	Twist Punch - 15mm hole	

METAL VALVES



Gate Valve - Heavy Duty

	•	•	
CODE	BSP(Fm)	BAR	PRICE
VAGV050	1/2"	20	
VAGV075	3/4"	20	
VAGV100	1"	20	
VAGV125	11⁄4″	20	
VAGV150	11/2"	20	
VAGV200	2"	20	
VAGV250	21/2"	20	
VAGV300	3"	20	
VAGV400	4"	20	



CODE	BSP(Fm)	BAR	PRICE
VABV025	1/4"	25	
VABV038	3/8"	25	
VABV050	1/2"	25	
VABV075	3/4"	25	
VABV100	1″	25	
VABV125	1¼"	25	
VABV150	1½″	25	
VABV200	2"	25	
VABV300	3″	16	
VABV400	4"	16	

Hose Pour Tap

CODE	BSP(M)	BAR	PRICE
HPT050	1/2"	15	
HPT075	3/4"	15	
HPT100	1"	12	

Can Strainer

A definitive must for dirty water delivery and general ditch or pond work. Mild zinc plated. For use with self priming pumps such as Alcon etc.



CODE	SIZE	PRICE
CS100	1″	
CS150	1½″	
CS200	2"	
CS300	3"	
CS400	4"	



Pipe Interrupter

WRAS approved for the prevention of siphonage and backflow.

CODE	BSP(M)	PRICE
NK28A2519	3/4"	

Swing Check Valve (H)



Install horizontally only

CODE	BSP(Fm)	BAR	PRICE
NVS050	1/2"	12	
NVS075	3/4"	12	
NVS100	1″	12	
NVS125	11⁄4″	10	
NVS150	11/2"	10	
NVS200	2"	10	
NVS250	21/2"	8	
NVS300	3"	8	
NVS400	4"	8	

Check Valve (V)



CODE	BSP(Fm)	BAR	PRICE
NV038	3/8"	40	
NV050	1/2"	40	
NV075	3/4"	40	
NV100	1"	30	
NV125	11/4"	30	
NV150	11/2"	25	
NV200	2"	25	
NV300	3"	16	
NV400	4"	16	

Foot Valve



CODE	BSP(Fm)	BAR	PRICE
FV050	1/2"	40	
FV075	3/4"	40	
FV100	1″	30	
FV125	1¼"	30	
FV150	1½″	25	
FV200	2"	25	
FV300	3"	16	
FV400	4"	16	

Double Check Valve



WRAS approved double check valves are designed to prevent the contamination of water supplies by back siphonage and backflow.



CODE	BSP(Fm)	PRICE
NVD050	1/2"	
NVD075	3/4"	
NVD100	1″	

Brass Inline Filter



CODE	BSP(Fm)	BAR	PRICE
FSI050B	1/2"	20	
FSI100B	1"	20	
FSI125B	11⁄4″	20	
FSI150B	1½″	20	

METAL VALVES



Brass Hose Union Bib Tap

Max. Pressure: 15 bar

CODE	BSP(Fm)	PRICE
HPTU050	1/2"	
HPTU075	3/4"	

Pressure Relief Valve Adjustable from 2-9 bar. Materials: Up to 11/4" Brass; 11/2" and above Bronze

CODE	BSP(Fm)	PRICE
PRV075	3/4"	
PRV100	1″	
PRV125	11⁄4″	
PRV150	11/2"	
PRV200	2"	

Mini Ball Valves 8 bar.

Body: polished chrome finish; Seal material: PTFE Operating temperature: -15°C to +100°C. 2 x Fm

CODE	BSP(Fm)	BSP(Fm)	PRICE
VABVM025F	1/4"	1/4"	
VABVM038F	3/8"	3/8"	
VABVM050F	1/2"	1/2"	
VABVM075F	3/4"	3/4"	

Body: polished chrome finish; Seal material: PTFE Operating temperature: -15°C to +100°C. M x Fm

CODE	BSP(M)	BSP(Fm)	PRICE
VABVM025MF	1/4"	1/4"	
VABVM038MF	3/8"	3/8"	
VABVM050MF	1/2"	1/2"	
VABVM075MF	3/4"	3/4"	

WRAS VALVES

The Water Regulations Advisory Scheme is a conformance mark that demonstrates that an item complies with high standards set out by water regulations in the UK.



Water Fittings Approved by the UK Water **Industry**

Bronze Gate Valve

PN20, Bronze Gate Valve, Handwheel operated - BS EN 12288

End Connections: BS EN 10266 Taper (ISO7 Rc)

Temperature rating (Water, Oil, Gas): 100°C



CODE	BSP(Fm)	BAR	PRICE
VAGVW050	1/2"	20	
VAGVW075	3/4"	20	
VAGVW100	1"	20	
VAGVW125	11⁄4″	20	
VAGVW150	1½"	20	
VAGVW200	2"	20	
VAGVW300	3"	20	

Nickel Plated Brass Ball Valve

PN40, Full Bore Nickel Plated Brass Ball Valve, lever operated - FxF

End Connections: BS EN 10266 Parallel (ISO 228/1)

Temperature rating: 70°C



CODE	BSP(Fm)	BAR	PRICE
VABVW050	1/2"	40	
VABVW075	3/4"	40	
VABVW100	1"	40	
VABVW125	11/4"	40	
VABVW150	11/2"	40	
VABVW200	2"	40	

SOLENOID VALVES

sales: 01772 812484

Features: normally closed design with minimal head loss. Slow opening and closing prevents water-hammer.

Standard Accessories:

Flow control stem for manual shut-off of valve and non-bleed manual override for opening of valve in the event of electrical failure.

Electrical Data:

Standard solenoid 2-way operated; Voltage 24 Volt AC & DC **Electrical Consumption: 3 Watts** Coil: epoxy coated, water resistant plunger

Specifications:

Max. recommended working pressure: 10 bar Recommended minimum pressure: 0.7 bar Max. recommended working temperature: 80°C

Bermad 200 Series Globe Valve

CODE	BSP(Fm)	V	BAR	PRICE
VASB050A	1/2"	24V AC	10	
VASB050D	1/2"	24V DC	10	
VASB075A	3/4"	24V AC	10	
VASB075D	3/4"	24V DC	10	
VASB100A	1"	24V AC	10	
VASB100D	1"	24V DC	10	
VASB150A	11/2"	24V AC	10	
VASB150D	11/2"	24V DC	10	
VASB200A	2"	24V AC	10	
VASB200D	2"	24V DC	10	

Bermad 200 Series Angle Valve

CODE	BSP(Fm)	V	BAR	PRICE
VASBA150A	1½″	24V AC	10	
VASBA200A	2″	24V AC	10	

Normally Open Solenoid Valve

CODE	BSP(Fm)	V	BAR	PRICE
VASB150NO	1½″	24V AC	10	
VASB200NO	2"	24V AC	10	



Bermad Parts

CODE	DESCRIPTION	PRICE					
VASBD01	¾"-1" Diaphragm						
VASBD02	1½"-2" Diaphragm						
VASBC12DC	12V DC Coil						
VASBC24DC	24V DC Coil						
VASBC120AC	120V AC Coil						
VASBC24AC	24V AC Coil						
VASBCL20DC	6-20V DC Latching Coil						

Bermad 200 Series Pressure Reducing Valve

The Bermad Pressure Reducing Valve is a line pressure driven control valve that reduces higher upstream pressure to very low and stable preset downstream pressure (0.5 bar).



www.lssystems.co.uk

CODE	BSP(Fm)	BAR	PRICE
PRAB150	11/2″	10	
PRAB200	2"	10	

Bermad Pressure Reducing Valve with Solenoid Control

This Solenoid Controlled, line pressure driven Pressure Reducing Valve opens or shuts in response to an electric signal. The solenoid is compliant with the common controllers and it features a manual override.



CODE	BSP(Fm)	V	BAR	PRICE
VASBPR150	1½″	24V AC	10	
VASBPR200	2"	24V AC	10	

Bermad 100 Series High Performance Solenoid Valves

Consider using when high flow & low pressure loss is required and when:

- Reinforced plastic valves are recommended for:
- High chemical and cavitation resistance
- Light weight valves which are frequently moved in crop rotation
- Ease of installation of large projects



CODE	DESCRIPTION	BAR	PRICE
VASBH2200A	2" 2-Way H.P. Solenoid Valve 24V AC	10	
VASBH2300A	3" 2-Way H.P. Solenoid Valve 24V AC	10	

Bermad 400 Series Metal Solenoid Valves

The Bermad 400 Series cast iron valves have been designed for the control of all types of irrigation and waterworks systems where long term reliability is essential.

Specifications:

Max Working Pressure Max Working Temperature Body & cover material Diaphragm Diaphragm retainer Spring

Voltage

10 bar 80°C Polyester coated cast iron Nylon fabric, reinforced NR Stainless steel Stainless steel

Series 100 & 400 **Pressure Reducing Valves** available on request.



1	CODE	DESCRIPTION	BAR	PRICE
	VASBM300A	3" Metal Solenoid Valve	10	
1	VASBM400A	4" Metal Solenoid Valve	10	

AIR & VACUUM VALVES

A.R.I. AV-010 Air & Vacuum Valve

The Air & Vacuum Valve discharges air during the filling or charging of the system, and intakes air into the system during system drainage.



CODE	DESCRIPTION		PRICE
VAAVA10075	ARI Air/Vacuum Valve ¾"	10	
VAAVA10200	ARI Air/Vacuum Valve 2"	10	

A.R.I. DG-10 **Combination Air Valve**

The DG-10 Combination Air Valve has the features of both an Air-release Valve and an Air/vacuum Valve. Reliable operation reduces water hammer incidents. Dynamic design allows high velocity air discharge, up to 0.8 bar differential pressure; preventing premature closing.



CODE	DESCRIPTION	BAR	PRICE
VAAVA16075	ARI Combination Air Valve ¾"	16	
VAAVA16200	ARI Combination Air Valve 2"	16	

PRESSURE REDUCING

Adjustable Direct Acting Pressure Reducer - 3/4"-PRV

Actuated by a pressure responsive diaphragm, which seeks to reach equilibrium between hydraulic and set spring force. It reduces higher upstream pressure to lower constant downstream pressure regardless of fluctuating demand or varying upstream pressure. Max. inlet pressure must not exceed 9 bar (125psi) and the max. working temperature must not exceed 80°C.



CODE	SPRING	ADJ RANGE	FLOW	BAR	PRICE
PRA075Y	Yellow	0.5-1.2 bar			
PRA075W	White	0.8-2.5 bar	0.2 - 5.0		
PRA075R	Red	2.0-4.0 bar	m³/hr	9	
PRA075B	Black	3.5-6.0 bar			

34" Low Flow Adjustable **Pressure Reducer**



CODE	SPRING	ADJ RANGE	FLOW	BAR	PRICE
PRA075YLF	Yellow	0.5-1.2 bar	0.03 - 5.0	0	
PRA075WLF	White	0.8-2.5 bar	m³/hr	9	

1" Adjustable Pressure Reducer



CODE	SPRING	ADJ RANGE	FLOW	BAR	PRICE	
PRA100W	White	0.5-1.2 bar				
PRA100R	Red	1.0-2.0 bar	0.4 - 8.0	0	9	
PRA100B	Black	1.5-3.5 bar	m³/hr	9		
PRA100N	Natural	3.0-5.5 bar				

1½" Adjustable Pressure Reducer



CODE	SPRING	ADJ RANGE	FLOW	BAR	PRICE	
PRA150W	White	0.5-1.2 bar				
PRA150R	Red	1.0-2.0 bar	0.5 - 18.0	9	_	ı
PRA150B	Black	1.5-3.5 bar	m³/hr			
PRA150N	Natural	3.0-5.5 bar				

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

HUNTER CONTROLLERS FOR TURF & LANDSCAPE

Hunter Eco-Logic Indoor Controller

- 3 programs, 4 starts per program
- Indoor controller, external transformer
- Max. station run time 4 hours
- Seasonal (global) adjustment 10-150%
- · Warranty 2 years
- Compatible with Hunter Clik sensors
- · Rain sensor bypass



CODE	DESCRIPTION	PRICE
NHUHCELC4I	Eco-Logic 4 Station - Indoor	
NHUHCELC6I	Eco-Logic 6 Station - Indoor	

Hunter X-CORE Controller

- 3 programs, 4 starts per program
- Maximum station run time 4 hours
- Warranty 2 years
- · Seasonal (global) adjustment
- Delay between stations
- 1 sensor input
- Compatible with Solar-Sync
- Indoor & Outdoor models



CODE	DESCRIPTION	PRICE
NHUEL2XCI	X-CORE 2 Station Controller - Indoor	
NHUEL4XCI	X-CORE 4 Station Controller - Indoor	
NHUEL6XCI	X-CORE 6 Station Controller - Indoor	
NHUEL8XCI	X-CORE 8 Station Controller - Indoor	
NHUEL4XCO	X-CORE 4 Station Controller - Outdoor	
NHUEL6XCO	X-CORE 6 Station Controller - Outdoor	
NHUEL8XCO	X-CORE 8 Station Controller - Outdoor	

Hunter PRO-C Modular Controller

- Base controller has 4 stations
- Purchase expansion modules to increase up to 15 stations maximum
- 3 programs, 4 starts per program
- Max. station run time 6 hours
- Seasonal (global) adjustment
- Compatible with Solar-Sync
- Delay between stations
- Non-water days
- Pump/master valve output 0.28 amps
- To make 16 stations, use a 9 station module and a 3 station module



CODE	DESCRIPTION	PRICE
NHUPROC4O	Pro-C 4 Station Controller - Outdoor	
NHUPROCSM3	Pro-C 3 Station Module	
NHUPROSM9	Pro-C 9 Station Module	

Hunter XC Hybrid Controller

- Controller can be battery or AC powered
- When the mains are off, the controller will automatically use battery power
- 3 programs, 4 starts per program
- Max. station run time 4 hours
- Operates 9V DC latching coils only
- Rain sensor connection and sensor bypass
- Global seasonal adjustment
- Delay between stations



CODE	DESCRIPTION	PRICE
NHUXC06	XC Hybrid - 6 Station Controller	
NHUXC12	XC Hybrid - 12 Station Controller	
NHUVS9VDC	Hunter 9V DC Latching Coil	

Hunter I-CORE Modular Controller

- Modular multi-cable controller
- Base controller 6 stations
- Expands to 30 stations (plastic)
- 4 independent programs
- 8 starts on programs A, B & C; 16 starts on D
- Max. station run time 12 hours
- 5 year warranty
- Solar-Sync compatible
- Global seasonal adjustment
- Cycle & Soak
- Delay between stations
- Flow monitoring





DESCRIPTION	PRICE
I-CORE 6 Station Controller - Plastic Base	
6 Station Expansion Module	
DUAL Decoder Module	
1 Station DUAL Decoder	
2 Station DUAL Decoder	
DUAL Surge Arrestor	
	I-CORE 6 Station Controller - Plastic Base 6 Station Expansion Module DUAL Decoder Module 1 Station DUAL Decoder 2 Station DUAL Decoder

Hunter PCC (PRO-C with fixed stations)

- All the features of the PRO-C but in fixed station models
- 3 programs, 4 starts per program
- Max. station run time 6 hours
- Seasonal (global) adjustment
- Delay between stations





CODE	DESCRIPTION	PRICE
NHUPCCO06	PCC 6 Station Controller - Outdoor	
NHUPCCO12	PCC 12 Station Controller - Outdoor	

HUNTER CONTROLLERS FOR TURF & LANDSCAPE

Hunter NODE Battery Controllers

- Battery powered controller which can operate any size Hunter solenoid
- Fully waterproof casing
- Operates 9V DC latching solenoids
- Includes connection for rain sensor
- The NODE-100 comes with a latching coil
- NODE-200 & NODE-400 exclude the latching coil purchase separately
- 3 programs, 4 starts per program



CODE	DESCRIPTION	PRICE
NHUNODE1	1 Station Controller c/w 9V Coil	
NHUNODE1V	Controller c/w PGV Valve	
NHUNODE2	2 Station Controller w/o Coil	
NHUNODE4	4 Station Controller w/o Coil	
NHUVS9VDC	Hunter 9V DC Latching Coil	



ROAM Radio Remote

- Turn stations / programs on & off from up to 300 metres from the controller
- Operates with X-CORE, PRO-C, PCC, I-CORE and ACC controllers 128 programmable addresses so
- one ROAM transmitter can be used on multiple sites
- 2 year warranty
- Connect to controller via Smart-Port

CODE	DESCRIPTION	PRICE
NHUHCROAMKIT	Kit: Transmitter, Receiver and Smart-Port in case	
NHUHCROAMWH	Smart-Port Harness alone	



Solar Sync

- Automatically adjusts the daily program run times via **Evapo-Transpiration of local** weather
- Includes rain shut-off
- 5 year warranty
- Includes gutter mount bracket ACC, I-CORE & X-CORE have the Solar-Sync module preinstalled so you only need the

CODE	DESCRIPTION	PRICE
NHUSS	For ACC, I-CORE & X-CORE	
NHUSSW	Wireless version for ACC, i-CORE & X-CORE	

Hunter Accessories

Mini-Clik® Rain Sensor

Hunter Mini-Clik® Rain Sensor is world renowned for rain shut-off.

Adjusts for rainfall of 3 - 25mm. Includes 7.6 metres of wire, aluminium mount



CODE	DESCRIPTION	PRICE
NHUMCRS	Mini-Clik [®] Rain Sensor	

Wireless Rain-Clik® Rain Sensor

- Rain-Clik shuts the system off as soon as it starts to rain
- Wireless Rain-Clik uses a transmitter and receiver to eliminate the need for cables



CODE	DESCRIPTION	PRICE
NHUMCWRS	Wireless Rain-Clik® Sensor & Receiver	



RESIDENTIAL CONTROLLERS

Galconette E-Z Dial Controller

Features:

- Easy to install and simple to use
- Works with one 9V battery
- Watering time from one minute to 12 hours
- Up to four start times per day
- Working pressure from 1 to 10 bar
- 3/4" BSP connections
- Weather resistant
- **Built-in filter**
- Dial operation



#Galcon

CODE	DESCRIPTION	PRICE
VASGT9001EZ	Galconette E-Z Dial ¾"	

Galconette LCD Controller

Features:

- Easy to install and simple to use
- Works with one 9V battery
- Watering time from one minute to 12 hours
- Up to four start times per day
- Working pressure from 1 to 10 bar
- 34" BSP connections



CODE	DESCRIPTION	PRICE
VASGT9001	Galconette LCD ¾"	

GALCON-IQ Controller

Features:

- Easy to install and simple to use
- Works with one 9V battery
- Watering time from one minute to 12 hours
- Up to four start times per day
- Working pressure from 1 to 10 bar
- 34" BSP connections
- Weather resistant
- Rotating screen shields buttons and screen
- Built-in filter





CODE	DESCRIPTION	PRICE
VASGIQ	GALCON-IQ	

BLUETOOTH CONTROLLERS

Galconette BT

Features:

- Program and manual operation from smartphone
- Intuitive and easy programming

sales@lssystems.co.uk

- Download Galcon App
- Works with one 9V battery
- Weather resistant
- Working pressure 1-10 bar
- Flow rate 50-1200 l/hr
- 3/4" BSP connection
- Range 5-30 metres





CODE	DESCRIPTION	PRICE
VASGT9001BT	Galconette BT ¾"	

CARSON VALVE BOXES

6" Round Valve Box

Base 191mm Top 156mm Height 227mm

CODE	ITEM	PRICE
VB06RBL	Box	
VB06RLO	Spare Lid	

10" Round Valve Box

Base 292mm Top 254mm Height 260mm

CODE	ITEM	PRICE
VB10RBL	Box	
VB10RLO	Spare Lid	

Standard Valve Box

Base 406x533mm Top 305x432mm Height 311mm

CODE	ITEM	PRICE
VBSBL	Вох	
VBSEX	Extension	
VBSLO	Spare Lid	

Jumbo Valve Box

Base 487x654mm Top 375x544mm Height 305mm

CODE	ITEM	PRICE
VBJBL	Вох	
VBJEX	Extension	
VBJLO	Spare Lid	









HERON CONTROLLERS & CONTROL CABLE

HERON Multi-Wire Controller (Mi)

A versatile irrigation controller for horticulture, landscape and agriculture

- A superb range of software features enable you to customise the controller to match the exact needs of each installation
- Create irrigation programs, running any valve in any order
- Run up to 6 valves in parallel
- Option to operate your controller from a PC or a mobile phone
- Integrate with sensors and dosing systems
- Unique lightning surge suppression feature utilising optical technology built-in to all controllers
- Battery powered versions available in two sizes for 8 or 16 valves
- Model sizes are available for 4, 8, 12 or 16 valves
- The Mi-144 irrigation controller runs 16 valves as standard but can be upgraded to support 144 valves using expansion boxes and additional output cards.



Heron Multi-Wire Controllers - Fixed

CODE	DESCRIPTION	PRICE
HCMIFIX004A	Mi-4 4 Station Controller AC	
HCMIFIX008A	Mi-8 8 Station Controller AC	
HCMIFIX012A	Mi-12 12 Station Controller AC	
HCMIFIX016A	Mi-16 16 Station Controller AC	

Heron Multi-Wire Controller - Expandable

CODE	DESCRIPTION	PRICE
HCMI144016A	Mi-144 16 Stations as standard Controller AC	
HCMIADD8ACC	Mi 8 Valve Expansion Card	
HCMIADD16ACC	Mi 16 Valve Expansion Card	
HCMIADDBOXC	Output Box (Required for cards)	

Heron Sensors and Weather Stations

CODE	DESCRIPTION	PRICE
HCMIWST2TRG	Weather Station 2 (Rain and Temperature)	
HCMILIGSENE	Digital Output Light Sensor	
HCMIHUMSENE	Digital Output Humidity Sensor	
HCMIRAINSEN	Digital Output Rain Gauge	
HCMIRAININGB	Digital Output Raining Sensor	
HCMITMPSCR	Digital Indoor Temperature Sensor (Basic)	
HCMITMPASP	Digital Indoor Temperature Sensor (Aspirated)	
HCMILEAFSEN	Leaf Sensor (Leaf Interface Req'd)	
HCMILEAFINT	Single Wet Leaf Interface Unit	

3 Year Warranty on all Heron Controllers
PC Operation
Mobile Phone Operation
from 4 to 144 Valves

Low Voltage Cable

Stocked in 100m reels, however 500m reels also available on request.





CODE	DESCRIPTION	REEL	PRICE
LVC0802	2-core x 0.8mm	100m	
LVC0803	3-core x 0.8mm	100m	
LVC0804	4-core x 0.8mm	100m	
LVC0806	6-core x 0.8mm	100m	
LVC0808	8-core x 0.8mm	100m	
LVC0810	10-core x 0.8mm	100m	
LVC0812	12-core x 0.8mm	100m	
LVC0814	14-core x 0.8mm	100m	
LVC0816	16-core x 0.8mm	100m	
LVC0820	20-core x 0.8mm	100m	
LVC0824	24-core x 0.8mm	100m	
LVC2502	2-core x 2.5mm	100m	
LVC2503	3-core x 2.5mm	100m	

Cable Jointing Accessories


GREASE FILLED CONNECTORS can accommodate wires from 0.1mm to 3.0mm in different combinations within the same connector. Ideal for protecting control cables in greenhouses.



CODE	DESCRIPTION	PRICE
ELE118	Grease Filled Connectors (Medium Orange)	
NTOLUKDBRY6	DBR/Y-6 Direct Burial Connector	

Mist Control Unit

This is a simple control system designed to automatically provide the optimum mist condition for the rooting of cuttings. Consisting of a Mist Control Unit linked to an Electronic Leaf moisture sensor, the unit operates automatically by changes of moisture on the Electronic Leaf. The unit can be adjusted to give mist burst of durations from around 3 to 10 seconds, the option of a manual override provides for a continuous mist if desired.



ELECTRONIC LEAF

Positioned amongst the cuttings this unit is a moisture sensor which determines the frequency of misting. Moisture on the surface of the detector carries a current between its two electrodes. When the water has evaporated the circuit is broken, sending a signal the Mist Control Unit, causing misting to commence.

CODE	DESCRIPTION	PRICE
CPSM	Mist Control Unit 240v	
WDL076	2.5m (7'6") Leaf Sensor	
WDL150	5m (15') Leaf Sensor	
WDL300	10m (30') Leaf Sensor	

MP ROTATOR SPRINKLER



The Ideal 2.5m-10.7m Solution


Maintain Matched Precipitation - Any Arc, Any Radius.

All MP Rotator* sprinklers can be combined on the same zone for greater design and installation flexibility.

The MP Rotator can be adjusted with just a screwdriver and your hand, but the MPR Tool makes adjustment even easier!







Water Conservation

MP Rotators are more efficient than sprays because they apply water more slowly and evenly. In fact, you use 30% less water even though you run MP Rotators about twice as long as sprays.

Lower System Cost

The good news about applying water more slowly and evenly is that MP Rotators lower your system costs. You can run more heads off your water meter and reduce the number of zones required. In many cases, you can use smaller pipe.

Revitalise Old Systems

With so many models to choose from, the MP Rotator has the perfect solution for rejuvinating an older spray system without requiring a new point of connection, new lateral lines, or new valves. Some models even make it possible to eliminate existing heads, saving additional labour and material costs. Even better, independent water audits have shown potential water savings of up to 30% when systems are retrofitted with MP Rotators.



Superior Efficiency

Multiple rotating streams provide excellent uniformity

Matched Precipitation

Automatic matched precipitation even after arc and radius adjustment

Minimal Runoff

Low precipitation rate reduces runoff on slopes and tight soils

Rotator Technology

Proven in demanding agricultural conditions since 1987

Superior Dirt Tolerance

"Double-pop" flushes on start-up and shut-down

Simple and quick adjustments

Easy arc adjustment, easy radius adjustment up to 25%, no nozzle to change

PRS-40 Pressure Regulated Body

- Pro-Spray Body with built-in 40 psi (2.8 bar) pressure regulator to control the flow rate
- Designed for use with the MP Rotator (see page 162)
- · Check-valve: check to 3m elevation
- 5 year warranty
- Heavy duty spring
- Pressure-activated wiper seal
- Grey coloured top denotes PRS-40



CODE	DESCRIPTION	PRICE
NHUPRS40-4PCV	2.8 bar reg. 4" Pop-up c/w Check Valve	
NHUPRS40-6PCV	2.8 bar reg. 6" Pop-up c/w Check Valve	

MP Rotator Accessories

PRS Pressure Regulated Shrub-Head

Revitalise old systems with the easy to install Hunter PRS Shrub Head.

PRS30 body with built-in 2.1 bar regulation. PRS40 body with built-in 2.8 bar regulation.

See picture left for typical installation on PVC riser.



CODE	DESCRIPTION	PRESSURE REG.	PRICE
NHUPRS30-00	PRS30 Shrub-Head	2.1 bar	
NHUPRS40-00	PRS40 Shrub-Head	2.8 bar	


MP Adjustment Tool

CODE

NHUMPADJ






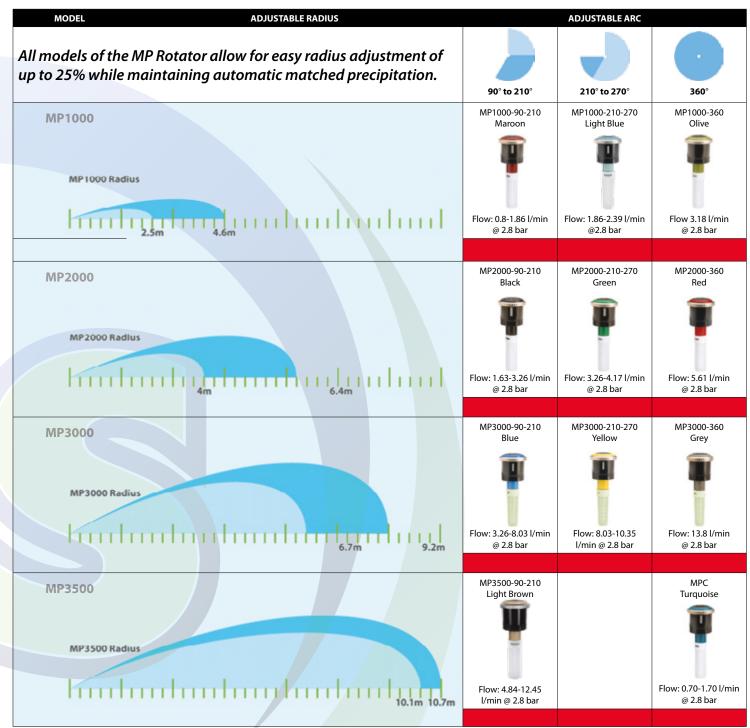

Example of MP Rotators in nursery stock beds

Sprinkler arcs can be selected to contain the application of water within the nursery stock bed.

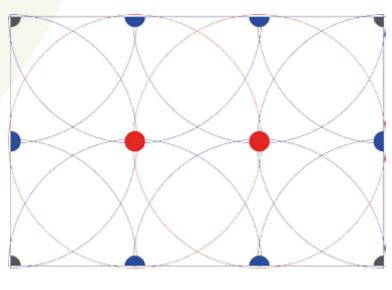


MP ROTATOR SET TO 90°

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

AMIAD MANUAL FILTERS

Amiad Tagline Filters

- Easy maintenance; No tools required for extracting the elements from the filter housing for rinsing
- High quality, excellent mechanical strength and corrosion resistance
- Low pressure loss
- Interchangeable filter elements for wide range of flow rates, various filtration degrees and irrigation applications
- Screen cylinders or Disc elements
- Max. working pressure: 8 Bar (120 psi)
- Max. working temperature: 60°C

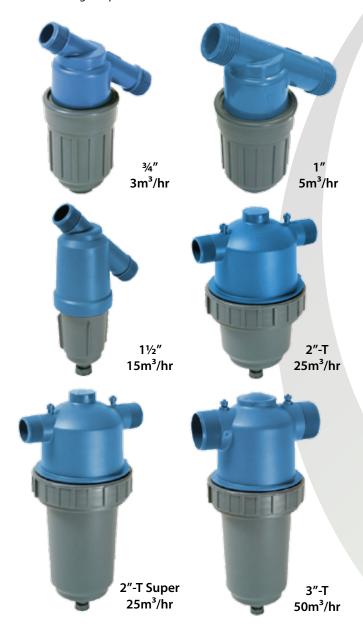

Tagline Filter c/w 130MM Screen Element

CODE	BSP(M)	Max. FLOW	PRICE	
PFTAG075	3/4"	660 gph (3 m³/hr)		
PFTAG100	1"	1,100 gph (5 m³/hr)		
PFTAG150	11/2"	3,300 gph (15 m³/hr)		
PFTAG200T	2″-T	5,500 gph (25 m³/hr)		
PFTAG200TS	2"-T Super	5,500 gph (25 m³/hr)		
PFTAG300T	3″-T	11.000 gph (50 m ³ /hr)		

Plastic Filters

- All-purpose plastic filters from ¾" to 3", with interchangeable filtration degrees from 3500 to 22 micron.
- High particle retention: Large filter area, allows long intervals between cleaning. 'Super' feature allows for even longer intervals between cleaning, and highly recommended for use with poor water quality
- Non-corrosive and durable: Engineered plastics; no metal parts in contact with water
- Semi-automatic cleaning systems available by adding Scanaway assembly as shown on the next page.



Plastic Filter c/w 100MM Screen Element

CODE	BSP(M)	Max. FLOW	PRICE
PF075E	3/4"	660 gph (3 m³/hr)	
PF100E	1" Super	1,540 gph (7 m³/hr)	
PF150E	1½"Super	3,300 gph (15 m³/hr)	
PF200TE	2″-T	5,500 gph (25 m³/hr)	
PF200TSE	2"-T Super	5,500 gph (25 m³/hr)	
PF300TE	3″-T	11.000 gph (50 m³/hr)	

SCREEN ELEMENTS

Screen Elements

CODE	TO FIT FILTER	SCREEN COLOUR	ММ	PRICE
PFE075008			0.074	
PFE075010			0.10	
PFE075020	3/4"		0.20	
PFE075030			0.30	
PFE075050			0.50	
PFE100008			0.074	
PFE100010			0.10	
PFE100013	1″		0.13	
PFE100020	I		0.20	
PFE100030			0.30	
PFE100050			0.50	
PFE150008			0.074	
PFE150010			0.10	
PFE150013	41///		0.13	
PFE150020	11/2″		0.20	
PFE150030			0.30	
PFE150050			0.50	
SFE200008			0.074	
SFE200010			0.10	
SFE200013	2″-T		0.13	
SFE200020	2 -1		0.20	
SFE200030			0.30	
SFE200050			0.50	
PFE300008			0.074	
PFE300010			0.10	
PFE300013	2"-T Super &		0.13	
PFE300020	3″-T		0.20	
PFE300030			0.30	
PFE300050			0.50	

Disc Elements

CODE	TO FIT FILTER	DISC COLOUR	ММ	PRICE
PFD100010	1″		0.10	
PFD150010	1½″		0.10	
SFD200025	2″-T		0.25	

Filter Element Table



MESH	MICRON	MM	USE WITH
30	500	0.50	Sprinklers
50	300	0.30	Mini Canialdon
60	250	0.25	Mini Sprinklers Mist Propagation Spray Nozzles
75	200	0.20	Spray Nozzies
120	130	0.13	
155	100	0.10	Drip Systems
200	74	0.074	
<u> </u>	·	·	

SEMI-AUTOMATIC FILTERS

The "Scanaway" Assembly



filtration degrees
500-50 micron

supported diameters		
2" - 14"		



Quick and efficient way for cleaning manual filters

The Scanaway assembly consists of a suction-scanner, a hollow pipe with suction nozzles, that is facing the inner side of the screen.

Outside the filter a handle is connected to the "suction" scanner, allowing turning the scanner in a spiral movement so it rotates inside the screen surface without touching the screen mesh.

Opening the exhaust valve at the filter lid creates low pressure conditions in the suction scanner, which cause the scanner nozzles to suck-in the dirt particles from the screen surface and expel the dislodged particles out through the exhaust valve.

Scanning is done during the filtration process without having to stop the flow of process water through the filter.

The optional **Clogging Indicator** is a special feature mounted on the filter pressure check points and acts like a "traffic light". When the pressure differential across the screen reaches a pre-set value of 0.5 bar the red button of the Clogging Indicator pops-up to visually indicate that the filter needs cleaning

Technical Specifications:

- Maximum operating pressure 10 bar
- Minimum pressure 2 bar during flushing

Supported Filters:

- Plastic: 2"T, 2"T-Super, 3"T
- Steel: 2" In-Line, 3" In-Line, 4"L, 4"S, 6"C, 6"S, 8", 10", 12", 14"



CODE	SCANAWAY KIT	PRICE
PFCSK2T	Scanaway + 2"T Plastic Filter	
PFCSK3T	Scanaway + 3"T Plastic Filter	
PFCSCI	Optional Clogging Indicator	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

AUTOMATIC FILTERS

Series 850

The most efficient hydraulic filters that require no external power source

The filter has a specially effective suction nozzle system for cleaning the screen. The self-cleaning mechanism is hydraulically operated by the in-line water pressure. The cleaning process can be activated automatically or manually. During flushing cycle the suction nozzles scan the entire screen's inner surface in a helical movement.

Advantages:

- High Reliability: Maintains high filtering efficiency
- Low Head loss
- Efficient fully automatic self-cleaning mechanism
- Filter uses small quantities of water to flush the screen
- Filtered water supply is not interrupted during flushing
- Simple and easy to operate
- Low maintenance cost
- Low cost per cubic metre of filtered water
- Long service life thanks to corrosion protection coating and non corrosive materials

Technical Specifications:

- Min. Working Pressure 2 bar
- Max. Working Pressure 10 bar
- The max. flow rate refers to screens over 200 microns
- Average duration of flushing cycle 10 seconds
- Other screens available (30 to 400 micron)
- All filters supplied with 100 micron screen
- Other configurations available on request



CODE	SIZE	RECOMMENDED FLOW RATE	SCREEN AREA	PRICE
NK455230	3" Flanged	18 - 40 m³/hr	1550 cm³	
NK455240	4" Flanged	27 - 80 m³/hr	3100 cm ³	
NK455260	6" Flanged	27 - 150 m³/hr	3100 cm ³	

851 Hydraulic Filter Series

Automatic Self-Cleaning Screen Filter

Features:

- Hydraulically operated by the in-line water pressure
- Automatic flushing according to pressure differential
- Low water consumption during flushing
- The flushing cycles do not interrupt filtered water supply
- Applications: Agriculture, irrigation, nozzle protection, golf courses, turf

Technical Specifications:

- Maximum operating pressure 10 bar
- Minimum pressure 1 bar during flushing
- Flushing cycle time for 1" model: 6-8 seconds; 2" & 3" models: 8-12 seconds
- All filters supplied with 100 micron screen other configurations available





CODE	DESCRIPTION	PRICE
NK45551010	1" OdisMatic 851 0.10mm Screen 7 m ³ /hr	
NK45552010	2" OdisMatic 851 0.10mm Screen 25 m³/hr	
NK45553010	3" OdisMatic 851 0.10mm Screen 40 m³/hr	
NK45553510	3" Flanged Odis 851 0.10mm Screen 80 m³/hr	
NK45554010	4" Flanged Odis 851 0.10mm Screen 80 m³/hr	
NK456010	Support Legs (fit the 4" Filter directly)	
NK456120	2" Flange Kit for Support Legs	

SAND SEPARATION

Hydrocyclones

Hydrocyclones are used for separation of sand and other solid matter from water or other liquids.

They are ideal for pre-filtering before sand or screen filters and for protecting pumps and valves from damage and abrasion caused by suspended solids.



CODE	INLET/OUTLET	HEIGHT	RECOMMENDED FLOW RATE	COLLECTION CHAMBER	PRICE
NK454005	3/4"(M) Thr.	40 cm	2 - 3.5 m ³ /hr	2 Litre	
NK454010	1"(M) Thr.	46 cm	3.5 - 7.5 m ³ /hr	2 Litre	
NK454015	1½"(M) Thr.	72 cm	7.5 - 12 m³/hr	5 Litre	
NK454030	3" Flanged	94 cm	18 - 34 m³/hr	10 Litre	
NK454040	4" Flanged	177 cm	52 - 82 m³/hr	120 Litre	

SAND FILTERS

Series 4 Sand Filters

These series 4 sand filters have been used successfully where deep and fine filtration of algae contaminated water is required especially with reservoirs and open tanks.

Water is forced at high pressure through a quantity of sand or light gravel. The accumulation of debris at the surface is removed by backflushing the filter to cause agitation of the surface layer and so separate this accumulation and carry it away to waste. In general, the more frequently backflushing occurs, the clearer the filtration medium and so the more effective it remains. This filter will typically remove debris down to 20 micron and should be backflushed automatically every hour.

CODE	ø	INLET	MAX. REC. DISCHARGE	BED WEIGHT	PRICE
NK450010	12"	1"(Fm) Thr.	6 m³/hr	60 Kg	
NK450015	16"	1½"(Fm) Thr.	9 m³/hr	90 Kg	
NK450020	20"	2"(Fm) Thr.	15 m³/hr	120 Kg	
NK450030	20"	3"(Fm) Thr.	20 m³/hr	120 Kg	
NK450022	24"	2"(Fm) Thr.	28 m³/hr	210 Kg	
NK450032	24"	3"(Fm) Thr.	30 m ³ /hr	210 Kg	
FMGF	Filter	Filter Media Garofilter (Sand/Gravel) 0.7x1.3mm [20kg]			
FMM		Filter Media (Sand	l/Gravel) 1.0x2.0mm	[25kg]	

Sand Filter Arrays

An array is a complete filtering system, which when assembled is ready to use. It is recommended to put a standard array on a concrete base. All the arrays come with a controller for automatic backflushing which includes a differential pressure switch with a time basis back up.

TYPE B arrays come complete with sand filters, epoxy coated steel manifolds, victaulic couplings, differential pressure switch, flushing valves and electronic controller. They also have a backup screen filter and have been factory pretested.

CODE	TYPE	INLET/OUTLET	MAX. FLOW RATE	PRICE
NK452010B	16" Single	2"(M) x 2"(F)	14m³/hr	
NK452020B	24" Single	2"(M) x 2"(F)	28m³/hr	
NK452040B	24" Double	3" Flanged	60m³/hr	



TYPE C mobile arrays come complete with sand filters, a screen filter as a backup and control filter, flushing valves and electronic controller. They come completely assembled and mounted on a steel pallet which can be moved to different locations.

CODE	TYPE	INLET/OUTLET	MAX. FLOW RATE	PRICE
NK452040C	24" Double	3" Flanged	60m³/hr	
NK452060C	24"Triple	4" Flanged	84m³/hr	

ALL FLANGES ARE TABLE D

AQUADA UV SERIES

Safe disinfection with low operating costs.

The Aquada UV series, extremely simple handling, low investment and operating costs and various possibilities of application in household, leisure and industry make the Aquada equipment the ideal model to start with in environmentally friendly UV disinfection.

Product Features

- Compact and inexpensive UV system for water disinfection applications
- 10m³/hr (45 GPM) maximum flow rate
- 5 different sizes with 3 variations by size
- Low operating costs
- Simple maintenance and cleaning

Compact, versatile and effective

The extremely simple handling, low investment and operating costs, make the Aquada the ideal introductory model in environmentally-friendly UV disinfection. The Aquada UV system is suitable everywhere that drinking water is taken from its own sources or where the quality from public networks insufficiently meets the desired needs.

The Aquada's centrally arranged low-pressure lamp in the high-grade steel chamber ensures that the appropriate UV dose is delivered for effective disinfection. Aquada UV systems can be integrated into existing water pipeline systems with minimal effort. The UV lamps can be operated for at least one year, are easily replaced, and both lamps and quartz sleeves can be assembled and disassembled without tools.

Highly customized Aquada options

Choose from three Aquada UV systems (Altima, Proxima and Maxima). Each of these systems is available in five different sizes to meet every individual requirement. Prices available on request.



CODE	UV UNITS	BSP	FLOW RATE	PRICE
PULUK76403522	Aquada Altima 4	3/4"	4.3m³/hr	£POA
PULUK76403523	Aquada Altima 7	1″	9.0m³/hr	£POA
PULUK76403524	Aquada Altima 10	1½"	13.4m³/hr	£POA

MODULAR GLASSHOUSE SPRINKLERS



DAN "Green Spin" (Bayonet Type)

Non-drip inverted micro sprinkler ideal for overhead irrigation in greenhouses.

- Bridgeless no dripping during operation
- No deflection or 'dead corners'
- Low trajectory
- Superior uniformity over a wide range of spacing
- · Connections to PE or PVC pipes
- Optional Leakage Prevention Device (LPD) prevents drainage after shut-off
- Tapered or bayonet connection
- Recommended working pressure:
 2.0-3.0 bar
- Filtration requirements: 200 microns



CODE	NOZZLE	FLOW @ 2 bar	DIAMETER COVERAGE	PRICE
DANBAYBLAG	Green	105 lph	9.0 m	
DANBAYBLAO	Orange	120 lph	9.5 m	
DANBAYBLAK	Black	160 lph	9.0 m	
DANBAYBLAB	Blue	200 lph	9.5 m	

Dan Super LPD Base (Bayonet Type)

- · Prevents drainage through emitters
- Low opening and closing pressureKeeps systems filled with water under pressure
- Allows all units to start-up or shut-down simultaneously

Opening pressure: 1.4 bar Closing pressure: 0.6 bar

CODE	CONNECTION	PRICE
DANBAYSLPDB	PE Barbed	
DANBAYSLPDM11	M11	
DANBAYSLPDW38	3⁄8″WW	

Dan Droppers - Fast n Fast

An excellent method of achieving exactly the correct height of sprinkler for controlled spread. Uses the unique Fast n Fast clip to enable the grower to move nozzles or cap-off nozzles effectively. Use with PE base only.

CODE	DESCRIPTION	PRICE
DANDRO30M11	M11 30cm FnF	
DANDRO60M11	M11 60cm FnF	
DANDRO3038	¾″WW 30cm FnF	
DANDRO6038	3⁄8″WW 60cm FnF	
DANDRO3047	PE 4/7 30cm FnF	
DANDRO6047	PE 4/7 60cm FnF	

Accessories



CODE	DESCRIPTION	PRICE
DANDROB47	4/7 x 4/7 Barb	
DANDROPLU	Fast N Fast - Plug	
DANDROSTA	Stabiliser	
DANBUTSTA	Butterfly Stand Spike	

For Glasshouse Overhead Watering

Basic components of the modular sprinkler are the Bridge or Bridgeless Assembly, which can accommodate all types of nozzles. Spreaders and Swivels, allowing a wide range of flow rates, distribution patterns and wetted diameters.

Dan Bridge Assembly (Push Fit Type)


Green Swivel



CODE	NOZZLE	ANTI-MIST	FLOW @ 2 bar	PRICE
DANUDGE	Grey	N/A	70 lph	
DANUDGG	Green	N/A	105 lph	
DANUDGY	Yellow	N/A	160 lph	
DANUDGB	Blue	N/A	200 lph	

Dan Bridge Assembly (Push Fit Type) Black Swivel | Best for Tunnels

For growers wishing to isolate a single bay or who have single span tunnels, the Black Swivel with Anti-Mist will offer improved coverage on the edge of the bay or tunnel.



CODE	NOZZLE	ANTI-MIST	FLOW @ 2 bar	PRICE
DANSBSGG	Green	Green	40 lph	
DANSBSYY	Yellow	Yellow	90 lph	

Dan Bridge Bases (Push Fit Type Only)

Add a suitable Base (with or without Leakage Prevention Device) to your chosen Bridge Assembly.

Barbed




CODE	DESCRIPTION	PRICE
DANBASEM11	M11 Base	
DANBASEM11LPD	M11 Base c/w LPD	
DANBASE38	3⁄8"WW Base	
DANBASE38LPD	3⁄8"WW Base c/w LPD	
DANBASEPE	PE Base	
DANBASEPELPD	PE Base c/w LPD	
DANBASE50	½" Base	

MODULAR GLASSHOUSE SPRINKLERS

(NAANDAN)

Dan Bridge Assembly - Spreaders

For different distribution patterns and wetted diameters. Other flow rate nozzles available.

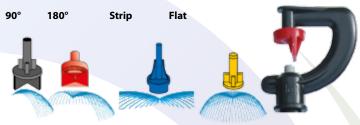

CODE	NOZZLE	SPREADER	FLOW @ 2 bar	PRICE
DANSPR090G	Green	90°	105 lph	
DANSPR180G	Green	180°	105 lph	
DANSPRSTRG	Green	180° Strip	105 lph	
DANSPRFLTG	Green	Flat	105 lph	

4mm Hole Punch

4mm Hole Punch for use with bayonet connectors.



CODE	DESCRIPTION	PRICE
NK880504	4mm Hole Punch	

Sprayline Blanking Plug



CODE	DESCRIPTION	PRICE
N11Z	M11 Blanking Plug	
N38Z	3∕₅WW Blanking Plug	

Fogger with LPD (Push Fit Type)

An affordable option for existing overhead spraylines for plant propagation systems. The nozzle design delivers a very fine mist that allows most of the water to evaporate before reaching the crop, the ideal solution for cooling and humidifying of glasshouses. The nozzle (7 lph) can be fitted into sprayline with M11 or ¾WW thread using a water supply of 4 bar. Complete with Leakage Prevention Device to prevent drainage from the Foggers at closure, and allows simultaneous



CODE	DESCRIPTION	PRICE
DANFOG4M11LPD	Fogger x4, M11 Base c/w LPD 28 LPH	
DANFOG438LPD	Fogger x4, ¾WW Base c/w LPD 28 LPH	
DANFOG4PELPD	Fogger x4, PE Base c/w LPD 28 LPH	

Super Fogger

startup of the system.

The system is suitable for two applications: cooling and humidity control, and spraying, together or separately. The Fogger system is installed above the crop throughout the greenhouse (1 unit for every 4.0 square metres). The mist cloud that is formed drifts downwards slowly and gradually to envelop both high and low crops.

Technical data:

- Operating Pressure: 4.0 bar
- Flow rate: 13 lph (2 x 6.5 lph outlets)
- Wetted Diameter: 1.2m
- Built-in Leakage Prevention Device for perfect pulsed operation

Choose your base*:

Female, Barbed, ¾"WW



LPD For Fogger

High Pressure LPD for Foggers. Opening pressure: 4 bar Closing pressure: 2.4 bar

CODE	CONNECTION	PRICE
DANFOGLPDB	Barbed	



DRIP IRRIGATION

sales: 01772 812484

Netafim Streamline™ X Integral Dripperline

If you want optimal irrigation and fertigation for your seasonal vegetables or field crops, install the toughest thin wall drip line ever made without worrying about any cuts or leaks. Streamline $^{\text{TM}}$ X, the extra tough drip line, comes with a unique ribbed surface that acts as a barrier between the ground and the drip line, making installtion and retrieval smoother than ever before.

Why Streamline™ X?

- Maximum Protection: Exterior ribbed surface prevents against potential dripline damage during installation and retrieval.
- Durable Dripper: Internal ribs minimise damage to dripper during installation.



Streamline™ X 16060-0.8L/H Low Flow

CODE	WALL THICK- NESS	DRIPPER SPACING	ROLL SIZE	PRICE
NETSTRX6202600LF	0.15mm	20cm	2,600m	

Streamline™ X 16060-1.10L/H

CODE	WALL THICK- NESS	DRIPPER SPACING	ROLL SIZE	PRICE
NETSTR6202600	0.15mm	20cm	2,600m	
NETSTR6303000	0.15mm	30cm	3,000m	

Streamline™ + 16080-0.72L/H Low Flow

CODE	WALL THICK- NESS	DRIPPER SPACING	ROLL SIZE	PRICE
NETSTRP8301000LF	0.20mm	30cm	1,000m	

Streamline™ X 16080-1.05L/H

CODE	WALL THICK- NESS	DRIPPER SPACING	ROLL SIZE	PRICE
NETSTRX8101000	0.20mm	10cm	1,000m	
NETSTRX8201000	0.20mm	20cm	1,000m	
NETSTRX8202200	0.20mm	20cm	2,200m	

Drip Tape Fittings



CODE	DESCRIPTION	PRICE
TTAPEA1616	Tape PE Adaptor 16mm	



CODE	DESCRIPTION	PRICE
TTAP16J	Tape Joiner 16mm	



CODE	DESCRIPTION	PRICE
TTAPAD16050M	Tape 16mm x ½"(M)	
TTAPAD16075M	Tape 16mm x ¾"(M)	



CODE	DESCRIPTION	PRICE
TTAP16E	Tape Elbow 16mm	



CODE	DESCRIPTION	PRICE
TTAP16T	Tape Tee 16mm	



CODE	DESCRIPTION	PRICE
TTAP16T050M	Tape Tee 16mm x ½"(M)	



CODE	DESCRIPTION	PRICE
TTAP16TO	Tape 16mm Take Off c/w Grommet	
TTAP16G	Spare Grommet	



CODE	DESCRIPTION	PRICE
TTAP16TOLF	Tape 16mm Take Off for Layflat	

Streamline Specifications:

	STREAMLINE™ X 16060	16060 Low Flow	STREAMLINE™ X 16080
Nominal Flow Rate (Iph @ 1 bar)	1.10	0.80	1.05
Dripper Diameter (OD x ID)	16.5 x 16.2mm	16.5 x 16.2mm	16.6 x 16.2mm
Wall Thickness (mm)	0.15	0.15	0.20
Max. Pressure (bar)	1.00	1.00	1.20

LANDSCAPE DRIPLINE

Porous Pipe 16mm

Porous pipe is a rubber pipe designed for many irrigation purposes. The pipe can be used for both on-surface and sub-surface irrigation and to water capillary matting on benches.

It should be used at a pressure between 4 & 12psi. The maximum run length is 50m and the output is 4 litres per hour per metre.

Porous pipe waters:

- Garden borders and flower beds
- Vegetable plots and plant pots
- Seed trays and capillary matting

Porous pipe irrigates:

- Gardens and landscapes
- Greenhouses, cloches and allotments

Benefits:

- Uses up to 50% less water than normal watering methods
- Cost effective when using a water meter
- Can be used with rain water collected via a water butt
- Provides precise watering
- Designed to be used at low pressure
- Easy to use and has a long life

Use 16mm Barbed Fittings with **Landscape Dripline** See pages 145-146







CODE	Ø mm	COIL	PRICE
PPO16030	16mm	30m	
PPO16050	16mm	50m	
PPO16100	16mm	100m	

Drip Irrigation Accessories

I	CODE	DESCRIPTION	PRICE
	NK209716	Ground Pipe Stake 16/20mm	

Ottima Drippers

Adjustable. Unscrew the cap one click at a time to increase the flow.

Screwing the cap completely down will stop the flow. Adjustable from 0-40 lph.



For watering plants in pots, planter boxes, shrubs and trees.

CODE	DESCRIPTION	PRICE
MIOCTA8	Ottima 360° Barbed	
MIOCTA8S	Ottima 360° on Stake - End Line	
MIOCTA8SI	Ottima 360° on Stake - In-Line	
CODE	DESCRIPTION	PRICE
CODE MIOCTA8S-180	DESCRIPTION Ottima 180° on Stake - End Line	PRICE

Landscape Drip Irrigation

Applications:

- Sub-surface and on-surface installation
- Curved, narrow and unshaped planting areas
- Intersections, highways and traffic islands
- Areas subject to vandalism
- Slopes and high wind areas
- Turf, shrubs and trees

Specifications:

- Dripper flow rates 1.6 lph
- Pressure compensating range: 0.5-4.0 bar
- Dripline OD: 16.0mm
- Max. system pressure: 4.0 bar
- Recommended filtration: 120 mesh (0.13mm)

Max. lateral length @ 3.0 bar

FLOW RATE	30cm	50cm
1.6 lph	123m	-



Features and Advantages:

- Anti-siphon mechanism prevents contaminants from being drawn into the dripper
- Self-compensating and self-cleaning
- 100% uniformity for long length laterals
- The location of the drippers in the dripperline prevents the entry of sediment. The water is drawn from the stream centre
- High resistance to mechanical damage, root intrusion and clogging
- Largest filter in each dripper
- Widest water passages within the dripper
- Unique TurboNet[™] flow path
- UV-resistant dripperline



CODE	FLOW RATE	DRIPPER SPACING	COIL	PRICE
NETTEC161630100	1.6 lph	30cm	100m	

DRIP IRRIGATION

Netafim PCJ High CNL Drippers

- · Latest Turbonet labyrinth design
- Operating pressure 1.5 4 bar
- · Higher shut-off pressure
- Silicone injection moulded diaphragm
- CNL action eliminates drainage

CODE	DRIPPER	OUTLET	OUTPUT	PRICE
NETCNLJUNHIG01	PCJ HIGH	Barbed	1.2 lph	
NETCNLJUNHIG02			2 lph	
NETCNLJUNHIG03			3 lph	
NETCNLJUNHIG04		*	4 lph	

Netafim PCJ High CNL Pre Assembled Sets

CODE	DRIPPER	LEAD	STAKE	PRICE	
NETZJHA0801PK	PCJ	80cm 1.2lph	Prevo Black		
NETZJHA0802PK	HIGH CNL	HIGH CNL	80cm 2lph	Prevo Black	
NETZJHA0802SK		80CIII ZIPII	Prevo 'S' Black		
NETZJHA0503PK		50cm 3lph	Prevo Black		
NETZJHA0503SK		Sucini Sipii	Prevo 'S' Black		
NETZJHA0804PK		80cm 4lph	Prevo Black		

Netafim Drip Accessories

CODE		DESCRIPTION	PRICE
NETPCJ60		100m x 60cm Lead 5.2x3.4mm	
NETPCJ80		100m x 80cm Lead 5.2x3.4mm	
NETTEE5B		Tee 5mm BxBxB	
NETTEE5T	AND DESIGNATION	Tee 5mm TxTxT	
NETTEE5TB	•	Tee 5mm TxBxT	
NETDUM5		Plug 5mm	
NETDUM8		Plug 8mm	
NETNIP5		Nipple 5mm	
NETMANF4	TE	Manifold - Flat 4-Way	
NETCAP		Drip Cap	

Netafim Metal Hole Punch

3mm Hole Punch


Comes complete with adaptor for inserting drippers and connectors.

Blue: 3mm drippers





CODE	DESCRIPTION	PRICE
NETPUN	Metal Hole Punch	
NK880503	3mm Hole Punch	

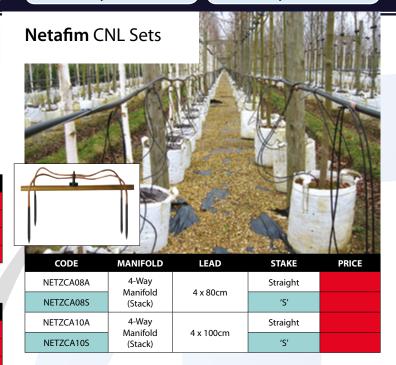

Netafim CNL Drippers

- Industry leading Turbonet passage
- Fully injected dripper with very low CV
- Pressure compensated and non-leakage
- Continuously self-flushing
- Operating range for CNL Low: 1 4 bar with shut-off 0.15 bar
- Operating range for CNL High: 1.4 4 bar with shut-off 0.30 bar

CODE	DRIPPER	OUTLET	OUTPUT	PRICE
NETCNLLOW02	CNL LOW	CNL LOW	2 lph	
NETCNLLOW04			4 lph	
NETCNLLOW08			8 lph	



Quick-Cut Scissor Hole Punch

This patented tool provides the easiest method for punching holes. The blade retracts fully after use.

4mm Hole



CODE	DESCRIPTION	PRICE
NK881004	4mm Quick-Cut for 16/20mm pipe	
NK881504	4mm Quick-Cut for 25/32mm pipe	

Netafim Stakes



CODE	DESCRIPTION	PRICE
NETAQUSTA	Aquadrip Stake - Black	
NETCT2	Capillary Lead 85cm 2 LPH	
NETARR	Arrow Stake	
NETARRS Arrow'S'Stake		
NETPRESTAK	Prevo Stake - Black	
NETPRESSTAK Prevo 'S' Stake - Black		
NETCLASTA	Side Clamp Stake	

Netafim Spray Stake

Applications:

Greenhouses, nurseries, garden pot irrigation

Specifications:

- Maximal working pressure: 2.0 bar
- To be inserted into a 5x3 micro-tube
- Allow distribution of water over relatively large plant areas



CODE	DESCRIPTION	PRICE
NETSPRGRE	Green Spray Stake 17lph	
NETSPRYEL	Yellow Spray Stake 12lph	

Netafim PC Spray Stake

Applications:

For all mini-spray nurseries and greenhouse applications

- High flow rates to supply correct irrigation in large pots/ growbags
- PC Spray Stake is ideal for any application in which a soil wetting mini spray pattern is desired
- UV resistant resin to provide years of trouble-free service

Features and Benefits:

- Pressure Compensated flow ensuring constant flow rate at varying inlet pressures
- Ensures uniform water and nutrient distribution during



irrigation		
CODE	DESCRIPTION	PRICE
NETSPRPC12L80	PC Spray Stake 12 LPH + 80cm Lead	
NETSPRPC12	PC Spray Stake 12 LPH (loose)	



SPRINKLERS AND STANDS

Rotoframe Sprinkler

sales: 01772 812484

Unique low pressure sprinkler featuring 'butterfly' rotating spinner and rotary frame which provides even water distribution. Used in standard hardy stock and for outdoor beds.

Nozzle size (mm)	Pressure (bar)	Output (m³/hr)	Diameter of Coverage (m)
	0.5	0.48	8.1
4.5	1.0	0.66	11.3
4.5	1.5	0.83	13.8
	2.0	0.95	15.9



CODE	CONNECTION	PRICE
NK590010	1/2" BSP(Fm)	
NK590011	¾" BSP(Fm)	

Part Circle Metal Sprinkler

Fingertip adjustment for watering full circle or any part of it. Baffle deflector controls height of jet and diameter of circle. Diffuser pin adjusts from heavy to fine stream.

Nozzle size (mm)	Pressure (bar)	Output (m³/hr)	Diameter of Coverage (m)
4.0	2.0	0.85	25.0



CODE	CONNECTION	NOZZLE SIZE	PRICE
NK600423 <mark>40</mark>	1/2" BSP(M)	4.0mm	

Part Circle Plastic Sprinkler (427B)

With 'ratchet' fingertip adjustment for watering full circle or any part of it.

Baffle deflector adjustable by a regulator-nut allowing change to both height and range of jet. Diffuser pin adjusts from heavy to fine stream.

Nozzle size (mm)	Pressure (bar)	Output (m³/hr)	Diameter of Coverage (m)
2.8	2.0	0.45	22.0
4.0	2.0	0.85	24.0



CODE	CONNECTION	NOZZLE SIZE	PRICE
NK600427 <mark>28</mark>	½" BSP(M)	2.8mm	
NK600427 <mark>40</mark>	1/2" BSP(M)	4.0mm	

Standard Sprinkler Kit

sales@lssystems.co.uk

Consists of:


- Sled base
- 30cm ½" riser, bush and socket
- 3/4"(M) quick coupling
- PTFE tape
- ½"(M) Zamak Sprinkler (@ 3 bar, 1.03m³/hr and 27m diameter of coverage)



CODE	RISER HEIGHT	BSP(M)	PRICE
NK68KIT01	30cm	1/2"	

Tripod

These standpipes are made of galvanised steel.



Risers

Galvanised tube threaded both ends for use with freestanding base or to extend height of standpipes.

CODE	RISER BORE	RISER HEIGHT	PRICE
SSR050050	1/2"BSP(M)	50cm	
SSR075050	3/4"BSP(M)	50cm	
SSR050100	½BSP(M)	100cm	
SSR075100	3/4"BSP(M)	100cm	

Standpipes

These standpipes are made of galvanised steel.

1 metre riser, in a 1" tee with two quick couplings.

Comes complete with a galvanised ground spike and stabilising plate.



CODE	RISER HEIGHT	RISER BORE	PRICE
SSSG050	1m	½"[BSP(M)]	
SSSG075	1m	¾"[BSP(M)]	

Freestanding Standpipes

The Freestanding standpipe is similar to the above but comes with a cross base allowing the standpipe to be used on hard surfaces.



CODE	RISER HEIGHT	RISER BORE	PRICE
SSFS050	1m	½"[BSP(M)]	
SSFS075	1m	³4"[BSP(M)]	

Hose Hanger

Heavy duty steel professional hose hanger for direct fixing to inner or outer walls. 100m x 1/2" or 50m x 3/4"



These specially designed hose guiders will protect floor level beds from damage as well as your hose from becoming tangled.



A CONTRACTOR		
CODE	DESCRIPTION	PRICE
НТНН	Hose Hanger	
SUN032M	Metal Hose Guide	

Field Stands

CODE		STAND	BSP	PRICE
NK680050	G. 17	Field Stand 1m 8mm	½"(M)	
NK683052		Field Stand 1m 12mm	½"(Fm)	
NK683055		Plug for 12mm Stand		
NK680016	-40	Metal Spike Base	½"(Fm)	
NK680010		Plastic Spike Base	½"(Fm)	

Standard Pro-Spray Body

- 1/2" BSP(Fm) inlet on all models
- Compatible with female threaded nozzles
- Recommended pressure range 1 7 bar
- Check-valve: check to 3m elevation
- Pressure activated wiper seal





CODE	DESCRIPTION	PRICE
NHUSP4PRO	4" Pop-up	
NHUSP6PRO	6" Pop-up	
NHUSPCV	Check Valve for Pro-Spray	

Rain Train Travelling Sprinkler

- Custom watering along the path of the hose propelling itself along the ground following the pattern laid by the hose
- A shut off ramp is provided to automatically shut off the sprinkler
- Diameter of coverage 5 14 metres, adjustable by twisting arms
- Minimum operating pressure 2.8 bar (40 psi)
- To be used with 1/2" or 3/4" hose



CODE	DESCRIPTION	PRICE
NK691000	Rain Train Sprinkler	

Perrot Rollcart-V

- Perrot's popular travelling sprinkler, full & part circle operation
- Water up to 120 metres length
- Minimum operating pressure 3.5 bar at the traveller
- PERROT ZE impact sprinkler provides acc distribution up to 18 metres radius

curate	O in
IPTION	PRICE

CODE	DESCRIPTION	PRICE
NK69P1000	RollcarT Travelling Sprinkler	

Sled Bases

METAL

Made from coated steel complete with a riser. Comes complete with a quick coupling to connect to any Geka type fitting.

COBRA

Made from heavy duty steel tube, powder coated in dark green. Coiled construction of the base means it should not tilt or tip over.



CODE	TYPE	RISER HEIGHT	RISER BORE	PRICE
SSSBM050	Metal c/w Quick	20	1/2"[BSP(M)]	
SSSBM075	Coupling	30cm	3/4"[BSP(M)]	
SSSBM075T	Metal c/w 'T' Quick Coupling	30cm	³¼"[BSP(M)]	
SSSCOB	Cobra	30cm	¾"[BSP(M)]	

HIGH PRESSURE HOSES



sales: 01772 812484

Widely regarded as the best hose on the market. We have large stocks of all popular sizes.

- Multi-layer construction ensures superb kink resistance
- Knitted reinforcement combines pressure resistance with excellent handling characteristics
- Smooth inner lining ensures optimum water flow and restricts algae growth
- Yellow outer layer is both UV and abrasion resistant
- Working temperature range -5°C to +60°C



CODE	HOSE ID	WP @ 20°C	COIL	PRICE
HOST12025	12.5mm (½")	10 Bar	25m	
HOST12050	12.5mm (½")	10 Bar	50m	
HOST12100	12.5mm (½")	10 Bar	100m	
HOST15050	15mm (¾")	10 Bar	50m	
HOST15100	15mm (¾")	10 Bar	100m	
HOST19025	19mm (¾")	10 Bar	25m	
HOST19050	19mm (¾")	10 Bar	50m	
HOST19100	19mm (¾")	10 Bar	100m	
HOST25025	25mm (1")	10 Bar	25m	
HOST25050	25mm (1")	10 Bar	50m	
HOST25100	25mm (1")	10 Bar	100m	
HOST30025	30mm (1¼")	8.3 Bar	25m	
HOST30050	30mm (1¼")	8.3 Bar	50m	
HOST40025	40mm (1½")	8.3 Bar	25m	
HOST40050	40mm (1½")	8.3 Bar	50m	
HOST50025	50mm (2")	8.3 Bar	25m	
HOST50050	50mm (2")	8.3 Bar	50m	

PVC Braided Fuel Hose


A heavy duty, translucent green, reinforced hose for all fuel application.



CODE	HOSE ID	WP @ 20°C	COIL	PRICE
HOSTF006025	6.3mm (¼")	10 bar	25m	
HOSTF010050	10mm (¾″)	10 bar	50m	
HOSTF012050	12mm (½")	10 bar	50m	

Tress Nobel

A blue flexible PVC hose for use with mechanical, agricultural, pulverisation and spray equipment. Resistant to most insecticides, pesticides, weed killers etc. Also used for spreading of liquid fertilisers and for compressed air.




	CODE	HOSE ID	WP @ 20°C	COIL	PRICE
	HOSTN008050	8mm	40 Bar	50m	
4	HOSTN010050	10mm (¾")	40 Bar	50m	
,	HOSTN010100	10mm (¾")	40 Bar	100m	
	HOSTN012050	12mm (½")	40 Bar	50m	
	HOSTN012100	12mm (½")	40 Bar	100m	
	HOSTN019050	19mm (¾")	30 Bar	50m	

Ragno 80

Ragno 80 bar is a soft, PVC hose with polyester yarn reinforcement, Easily identified as 80 bar by the red band. A flexible hose resistant to chemicals and weathering. It is manufactured from premium raw materials and has a double textile braid for high performance.

This hose can be used for spraying pesticides, insecticides, conveying fluids and compressed air under pressure.






CODE	HOSE ID	WP @ 20°C	COIL	PRICE
HOSRA8008100	8mm	80 Bar	100m	
HOSRA8010100	10mm (3/8")	80 Bar	100m	
HOSRA8013100	13mm (½")	80 Bar	100m	

PVC Clear Hose

A multi-purpose, transparent, single ply hose, for use in laboratories, industry and many food applications.

- Low to medium pressure
- -15° to +60°C



CODE	HOSE ID	COIL	PRICE
HOSCR006	6mm (¼")	30m	
HOSCR008	8mm (5/16")	50m	
HOSCR010	10mm (¾")	30m	
HOSCR012	12mm (½")	50m	
HOSCR019	19mm (¾")	30m	
HOSCR025	25mm (1")	30m	

MORE HOSES

Clear Braided Hose

Low cost, transparent reinforced hose that has many uses. Resistant to weather conditions. Lightweight and flexible this hose is ideal for irrigation use and other low temperature liquid transfers.

- Low to medium pressure
- -5° to +60°C



		_		
CODE	HOSE ID	WP @ 20°C	COIL	PRICE
HOSC025	6mm (¼")	23 Bar	30m	
HOSC038	10mm (¾")	17 Bar	30m	
HOSC050	12mm (½")	13 Bar	30m	
HOSC075	19mm (¾")	11 Bar	30m	
HOSC100	25mm (1")	8 Bar	30m	
HOSC125	32mm (1¼")	7 Bar	30m	
HOSC150	38mm (1½")	4 Bar	30m	


Sunny Hose Lay Flat

Sunnyhose is made of synthetic fibres and soft PVC in a continuous one process production. It is a general purpose hose, consistently high in quality, and available in long lengths. It is designed for water supply or drainage, for drip irrigation and sprinkler irrigation at farms, ideal for use as a drainage hose in emergency/flood/disaster situations when large quantites of water must be moved quickly.



Spiral Suction Hose

A medium weight PVC hose reinforced with a semi-rigid, crush resistant helix. It is tough, flexible and extremely durable under normal operating condi-







Pictured fittings not included

CODE	HOSE ID	WP	BURST	COIL	PRICE/M
HOSSG075	20mm (¾")	6 bar	21 bar	30m	
HOSSG100	25mm (1")	8 bar	24 bar	30m	
HOSSG125	32mm (1¼")	7 bar	21 bar	30m	
HOSSG150	38mm (1½")	6 bar	18 bar	30m	
HOSSG200	50mm (2")	6 bar	18 bar	30m	
HOSSG250	63mm (2½")	5 bar	15 bar	30m	
HOSSG300	75mm (3")	4 bar	12 bar	30m	
HOSSG400	102mm (4")	4 bar	12 bar	30m	
HOSSG600	152mm (6")	3 bar	9 bar	20m	
HOSSG800	202mm (8")	1.5 bar		6m	

Aquatic Hose

Hose for light duty suction and delivery application for water, garden and similarly light duty pumps. Highly flexible and crush resistant.



CODE	HOSE ID	COIL	PRICE
HOSVF050	12mm (½")	30m	
HOSVF075	20mm (¾")	30m	
HOSVF100	25mm (1")	30m	
HOSVF125	32mm (1¼")	30m	
HOSVF150	38mm (1½")	30m	

	STATE OF THE PARTY					
CODE	HOSE ID	WEIGHT	WORKING PRESSURE	BURST PRESSURE	PRICE / METRE	PRICE 100M COIL
PUR030300	25mm (1")	16.5 kg	7 Bar	21 Bar		
PUR030302	30mm (1¼")	20.0 kg	7 Bar	21 Bar		
PUR030304	38mm (1½")	15.0 kg	5 Bar	15 Bar		
PUR030306	50mm (2")	27.0 kg	4.5 Bar	13.5 Bar		
PUR030307	65mm (2½")	39.0 kg	4 Bar	12 Bar		
PUR030308	76mm (3")	53.0 kg	4 Bar	12 Bar		
PUR030310	102mm (4")	72.0 kg	4 Bar	12 Bar		
PUR030312	155mm (6")	120.0 kg	3 Bar	9 Bar		
PUR030314	200mm (8")	178.0 kg	3 Bar	9 Bar		
PUR030316	250mm (10")	265.0 kg	2.5 Bar	7.5 Bar		
PUR030318	300mm (12")	291.0 kg	2 Bar	6 Bar		

PROFESSIONAL HOSE TROLLEYS & REELS

Portable Hose Reel

Portable hose reel made from epoxy coated steel tube, complete with steel bracket for wall mounting and standard 1/2" couplings.

Can be adapted to 34" 40m x ¾"




CODE	DESCRIPTION	PRICE
HTS	Hose Reel 50m x ½"	

Hose Trolley

Hose trolley made from epoxy coated steel tube, complete with standard 1/2" hose coupling.

Can be adapted to 3/4" 70m x ¾"



CODE	DESCRIPTION	PRICE
HTM	Hose Trolley 100m x ½"	

Hose Trolley - Stainless Steel

Hose trolley made from Stainless Steel tube, complete with standard 1/2" hose coupling.

Can be adapted to 34" 70m x ¾"



CODE	DESCRIPTION	PRICE
HTMSS	Hose Trolley SS 100m x ½"	

Hose Trolley with **Stabilisers**

Hose trolley made from epoxy coated steel tube, complete with metal stabilisers and standard 1/2" hose coupling.

Can be adapted to 34" 100m x 3/4"



CODE	DESCRIPTION	PRICE
HTLS	Hose Trolley with Stabilisers 150m x ½"	

HD Professional Hose Trolley

Heavy duty professional hose trolley made from coated steel section, complete with quick couplings and Heavy duty compact trolley is specially designed for nursery pathways.






CODE		DESCRIPTION	PRICE
НТР		Pro Hose Reel 80m x 1"	
	HTPC	Compact Pro Hose Reel 80m x ¾"	
	NK5208HU	Brass Swivel	
	NK5208SR	Swivel Seal Kit	
	NK5208WH	Pneumatic wheel	

Freestanding Reel

Heavy duty professional freestanding hose reel with 1" quick couplings.



Wall Mounted Reel

A well engineered wall mounted tubular steel reel with a powder coated finish. Complete with 1/2" hose connectors.

Optional swivel & locking action model available



Nakoda Series 20

CODE

HTRS050P

HTRS050S

HTRL100

Heavy duty domestic reel suitable for use with cold water. Supplied with Helix Ultra Coil self-layering hose system; enabling the user to rewind the hose back onto the reel with no difficulty.

- High impact and weather resistant UV stabilised Polypropylene
- Fully enclosed outer case
- Auto lock and auto rewind mechanism
- Complete with fixed or 180 pivoting wall bracket
- Quality brass hose connectors, tap fittings and water spray gun included



CODE	DESCRIPTION	PRICE
HTRN02012	Nakoda Series 20 Auto Hose Reel 20m x ½"	

DRAMM PROFESSIONAL WATERING TOOLS

Dramm ColorMark™ Professional Lances In Six Colours

New colourful and strong watering tools made by Dramm USA. A full range of watering tools in various sizes, colours and lengths are now available including European couplings and connectors.

- The Premium Watering Lance
- Handcrafted brass shut-off valve
- Gentle, full flow for fast watering
- Comfortable foam grip
- Professional grade materials
- Six rich colours
- Lifetime guarantee
- American made with European connectors



DRAMM

CODE	COL.	LENGTH	ROSE	FLOW @ 2.7 Bar	PRICE
DRAMPWL040BH	Blue	40cm	400PL	42 LPM	
DRAMPWL060RH	Red	60cm	1000PL	26.5 LPM	
DRAMPWL060BH	Berry	60cm	400AL	42 LPM	
DRAMPWL060GH	Green	60cm	400PL	42 LPM	
DRAMPWL075OH	Orange	75cm	400PL	42 LPM	

WBPR Rubber Protection Ring

Since the invention of the 1000PL in the mid 1990's, Dramm has offered a protective ring to reduce damage to the Water Breaker body and the disk.



The new ring reduces any shock damage greatly, keeping your Water Breakers safe against rough handling.

CODE	DESCRIPTION	PRICE
DRAMRPR	Rubber Protection Ring	

One Touch Valve

The One Touch™ offers **thumb-tip control** of your water flow. Extremely easy to use, the One Touch can be adjusted from off to full-flow and anywhere in between with thumb-tip precision. Made from rubber over moulded, die-cast zinc with machined brass male threads, the One Touch is made to last.



With 42 LPM @ 2.7 Bar, the One Touch has enough flow to power all of the Dramm Water Breakers on this page.

CODE	DESCRIPTION	PRICE
DRAMOTV	One Touch Valve	

Seedling Nozzle

The Seedling nozzle allows you to water fragile plants, delicate seedlings or plant cuttings. This high-quality nozzle produces an extra fine, hollow cone mist pattern and sprays 7.5 LPM of water. Made from solid brass with 34" brass hose threads.



CODE	WEIGHT	FLOW @ 2.7 Bar	PRICE
DRAMSN	76g	11 LPM	

170AL Aluminium Water Breaker™ Nozzle

The 170AL Water Breaker is excellent for watering areas with low water pressure or with systems which restrict total water volume. It is designed for small containers (hanging baskets), and when using a fertiliser injector. Cast aluminium with 34" brass hose threads.



CODE	WEIGHT	FLOW @ 2.7 Bar	PRICE
DRAMMR170AL10	45g	26.5 LPM	

400AL Aluminium Water Breaker™ Nozzle

The original full-flow shower head nozzle. Dramm's aluminium 400AL Water Breaker provides fast, fullflowing watering without damage to your plants or disturbing soil. Used and recommended daily by professional growers worldwide. Cast aluminium and hand machined with 3/4" brass hose threads.



CODE	WEIGHT	FLOW @ 2.7 Bar	PRICE
DRAMMR400AL10	145g	42 LPM	

Commercial Plastic Fan Nozzle

The Dramm Commercial Fan Nozzle offers a fine to medium flow but with a rectangular shape.

Perfect for flats and plugs as well as long-distance watering with a soft pattern.

The Dramm Fan is made from lightweight ABS plastic and can be used directly on the hose or at the end of a Handi-Reach handle.



CODE	WEIGHT	FLOW @ 2.7 Bar	PRICE
DRAMPFN	76g	26.5 LPM	

1000PL Water Breaker™ Nozzle

The 1000PL Redhead Water Breaker has over 1,000 micro holes that create an ultra-soft flower shower which will not disturb delicate soil or harm tender plants. ABS plastic and stainless steel construction. 34" hose threads.

Use with a Dramm In-Line Hose Filter to prevent clogging.



CODE	WEIGHT	FLOW @ 2.7 Bar	PRICE
DRAMPR1000PL10	45g	26.5 LPM	
DRAMILF175SS	SS Inline F	Filter 175mu	

400PL Water Breaker[™] Nozzle

The 400PL Water Breaker provides fast, full-flow watering without damage to your plants Patterned after the original 400AL, the 400PL is made from highimpact ABS plastic and aluminium to provide a lightweight alternative. Used by professional growers worldwide. 34" hose threads.



CODE	WEIGHT	FLOW @ 2.7 Bar	PRICE
DRAMPR400PL10	37g	42 LPM	

WATERING LANCES, ROSES & ADAPTORS

Metal 'Soft Rain' Lance

Complete with alloy rose, quick coupling and metal valve.

- 19mm aluminium lance
- Full flow: 51 lpm @ 6 bar
- Threaded ¾"(M) outlet



CODE	LENGTH	PRICE
SRL040	40cm	
SRL060	60cm	
SRL090	90cm	
SRL120	120cm	

CT Amateur Trigger Lance

Rose not included.

- 20mm aluminium lance
- Threaded ¾"(M) outlet
- Threaded ¾"(Fm) inlet



Trigger Lance


60cm lance and quick coupling, rose not included.

- 14mm aluminium lance
- Full flow: 39 lpm @ 6 bar fine spray setting
- Threaded M11(Fm) outlet



Telescopic 'Hanging Basket' Lance

Extendable from 1.6m to 2.8m. Complete with metal valve and alloy rose. Choice of angled heads: 135° being particularly suited to watering hanging baskets.

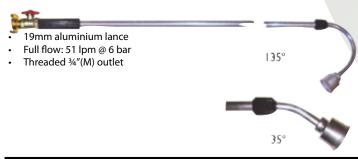

CODE	LENGTH	PRICE
SRTLSLHB	160-280cm 135°	
SRTLSL	160-280cm 35°	

Soft Rain Lance Filter



19mm aluminium lance Full flow: 47 lpm @ 6 bar Threaded ¾"(M) outlet

Complete with plastic valve, rose and quick coupling.

Plastic 'Soft Rain' Lance



Danish Trolley Watering Bar

Perfect for watering plants on Danish Trolleys.

- · Light metal with quick hose coupling
- · Number of nozzle bores: 32





Metal Spray Gun 6 Function

- Soaker
- Cone
- Flat
- Shower
- Jet
- Mist

CODE	FITTING	PRICE
NK039479	Metal 6 Function Spray Gun	
NK039486	Functions as above but with Rubber Grip	

Aluminium Pistol

Complete with adjustable nozzle and trigger control.

AKBO Water Gun

- Adjustable spray pattern from solid jet to fine spray by on/off trigger
- Inlet ½"(Fm), covered in thick protective EPDM rubber
- Adjustable water volume by turning finger screw on rear of gun
- Max. Press. 24 bar
- Max. Flow 65 lpm
- Max. temp. 90°C



CODE	PRICE	
SRSPA		Р



CODE	PRICE
PUDAKBO001	

WATERING LANCES, ROSES & ADAPTORS

Small Alloy Rose

- Threaded ¾"(Fm) connection
- 90 lpm @ 5 bar

Large Alloy Rose

- Threaded ¾"(Fm) connection
- 110 lpm @ 5 bar

Fine Spray Nozzle

M11(M) connection

Triple Jet Nozzle

- Threaded ¾"(Fm) connection
- 7.57 lpm













SECTION AND DESCRIPTION OF THE PARTY OF THE	
CODE	PRICE
SRN48A	



SRN46F

Spray Washer Nozzle

Threaded 3/4"(Fm) connection



SRN40F







• Threaded ¾"(Fm) connection







Shower Rose

Threaded ¾"(Fm) connection

Fan Spray Head

- Threaded 3/4"(M) connection
- 2mm or 3mm nozzle

















Shower Rose with **Bumper**

Threaded ¾"(Fm) connection





CODE	PRICE
SRSRB	

Spare Bumper

For above shower rose



CODE	PRICE
SRSRBS	

Full Jet Nozzle


Threaded 3/4"(M) connection

Mini Ball Valves

SRN55M3

• ¾"(MxFm) connection

SRLVP - Plastic







Nipples & Adaptors





CODE	PICTURE	THREADED	PRICE
SRM3M3	А	3/4"(M) x 3/4"(M)	
SRM3M1	В	3/4"(M) x M11(M)	





Hose connectors: P.191 Professional hoses: P.184

HOSE ADAPTORS



PP H.Ad. 6 Bar [BSP(M)]

CODE	BSP(M)	Ø mm Hose	PRICE
HA025025M	1/4"	7	
HA038038M	3/8"	10	
HA050050M	1/2"	13	
HA050075M	3/4"	13	
HA075050M	1/2"	20	
HA075075M	3/4"	20	
HA075100M	1"	20	
HA100075M	3/4"	25	
HA100100M	1"	25	
HA100125M	11⁄4″	25	
HA125100M	1"	32	
HA125125M	11⁄4″	32	
HA143125M	11⁄4″	38	
HA143150M	11/2"	38	
HA150125M	11⁄4″	40	
HA150150M	1½″	40	
HA200150M	1½"	50	
HA200200M	2"	50	



PP H.Ad. 6 Bar [BSP(F)]

CODE	BSP(F)	Ø mm Hose	PRICE
HA038038F	3/8"	10	
HA050050F	1/2"	13	
HA075075F	3/4"	20	
HA075100F	1"	20	
HA100100F	1"	25	
HA125125F	11⁄4″	32	
HA150150F	1½"	40	
HA200200F	2"	50	



PP H.Ad. Elbow 6 Bar [BSP(M)]

CODE	BSP(M)	Ø mm Hose	PRICE
HAE050050M	1/2"	12	
HAE050075M	3/4"	12	
HAE058050M	1/2"	16	
HAE075050M	1/2"	20	
HAE075075M	3/4"	20	
HAE100075M	3/4"	25	
HAE100100M	1″	25	
HAE125125M	11⁄4″	32	
HAE150150M	1½"	40	
HAE200200M	2"	50	



PP H.Ad. Elbow 6 Bar [BSP(F)]

CODE	BSP(F)	Ø mm Hose	PRICE
HAE050050F	1/2"	12	
HAE075075F	3/4"	20	
HAE100100F	1″	25	
HAE125125F	11⁄4″	32	
HAE150150F	1½"	40	
HAE200200F	2″	50	

Nylon Hose Joiner



CODE	Hose Ø		PRICE
HAJ050	1/2"	13mm	
HAJ058	5⁄8"	16mm	
HAJ075	3/4"	20mm	
HAJ100	1″	25mm	
HAJ125	11⁄4″	32mm	
HAJ150	1½″	39mm	

Nylon Hose Reducer



CODE	From Ø	To Ø	PRICE
HARJ075050	3/4"	1/2"	
HARJ100075	1"	3/4"	
HARJ125100	11/4"	1"	





CODE	Hos	se Ø	PRICE
HAE050	1/2"	13mm	
HAE058	5/8"	16mm	
HAE075	3/4"	20mm	
HAE100	1″	25mm	
HAE125	11/4"	32mm	
HAE150	1½"	39mm	
HAE200	2"	50mm	·

Nylon Te<mark>e</mark>



CODE	Hose Ø		PRICE
HAT050	1/2"	13mm	
HAT058	5/8"	16mm	
HAT075	3/4"	20mm	
HAT100	1″	25mm	
HAT125	11/4"	32mm	
HAT150	1½″	39mm	

Nylon Hose Y



CODE	Hose Ø		PRICE
HAY050	1/2"	13mm	
HAY058	5/8"	16mm	
HAY075	3/4"	20mm	
HAY100	1″	25mm	

Multistage Hose Adaptor



CODE	BSP	Hose Ø	PRICE
HAMS050M	½"(M)	3/8", 1/2", 3/4"	
HAMS075M	³⁄4″(M)	1/2", 3/4", 1"	
HAMS100M	1"(M)	3/4", 1", 11/4"	
HAMS125M	1¼"(M)	1", 1¼", 1½"	
HAMS150M	1½"(M)	1/2", 3/4", 1", 11/4"	
HAMS100F	1"(F)	1/2", 3/4", 1"	
HAMS125F	11/4"(F)	³ ⁄ ₄ ", 1", 1½"	

HOSE CONNECTORS

Metal Hose Adaptor



HOSE	BSP(M)	PRICE
1/4"	1/4"	
3/8"	3/8"	
3/8"	1/4"	
1/2"	1/2"	
3/4"	1/2"	
1/2"	3/4"	
3/4"	3/4"	
1"	3/4"	
3/4"	1″	
1"	1″	
11/4"	11⁄4″	
11/2"	1½″	
2"	2″	
	14" 36" 36" 12" 34" 1" 114" 11/2"	¼" ¼" ¾6" ¾6" ¾6" ¼" ½" ½" ¾" ½" ¾" ¾" ¾" ¾" ¾" ¾" 1" ¾" 1" 1" 1" 1" 1½" 1½"

Metal Swivel Coupling



CODE	HOSE	BSP(Fm)	PRICE
SC038038F	3/8"	3/8"	
SC050050F	1/2"	1/2"	
SC050075F	1/2"	3/4"	
SC075075F	3/4"	3/4"	
SC075100F	3/4"	1″	
SC100100F	1″	1″	
SC125125F	11/4"	11/4"	
SC150150F	1½"	1½"	
SC200200F	2"	2"	
SC300300F	3"	3"	

Steel Plated Hose Mender



CODE	HOSE I.D.	PRICE
HJ038	3/8"	
HJ050	1/2"	
HJ075	3/4"	
HJ100	1"	
HJ125	11⁄4″	
HJ150	1½"	
HJ200	2"	
HJ300	3″	
HJ400	4"	
HJ600	6"	·

BSP(M)

2 Way Outlet Valve to **Bayonet**



CODE	BSP(Fm)	PRICE
NK039019	3/4"	

• 1	
	(0)
W U	

2 Way Outlet Valve to

CODE	BSP(Fm)	PRICE
NK039119	3/4"	

Quick Coupling Hose



CODE	SIZE	PRICE
QCH038	3/8"	
QCH050	1/2"	
QCH058	5/8"	
QCH075	3/4"	
QCH100	1″	
QCH125	1¼″	
QCH150	1½″	

Quick Coupling Accessories

CODE	ITEM	PRICE
QCY	Y-Piece	
QCS	Blank Cap	
QCW	Rubber Seals	

Bib Tap with Quick Connection



CODE	BSP(M)	PRICE
NK039312	1/2"	

3 Way Outlet Valve to Cap BSP(M)



CODE	BSP(Fm)	PRICE
NK039219	3/4"	

Quick Coupling



CODE	BSP(M)	PRICE
QCM050	1/2"	
QCM075	3/4"	
QCM100	1″	
QCM125	11⁄4″	
QCM150	1½″	

Quick Coupling



CODE	BSP(Fm)	PRICE
QCF038	3/8"	
QCF050	1/2"	
QCF075	3/4"	
QCF087	7/8"	
QCF100	1″	
QCF125	11⁄4″	
QCF150	1½″	

2 Way "Wide" Outlet Valve to BSP(M)



CODE	BSP(Fm)	PRICE
NK039210	3/4"	





CODE	BSP(M)	PRICE
NK03M0218	1″	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

HOSE CONNECTORS



Tap Connector

CODE	BSP(Fm)	PRICE
NK031012	1/2"	
NK031119	3/4"	
NK031225	1"	



Adaptor [BSP(M)]

CODE	BSP(Fm)	PRICE
NK032012	1/2"	
NK032119	3/4"	



Connector [BSP(M)]

ĺ	CODE	BSP(Fm)	PRICE
	NK033319	3/4"	



Hose to Bayonet Connector

CODE	HOSE	PRICE
NK033012	1/2"	
NK033119	3/4"	



Hose to Hose Connector

CODE	HOSE	PRICE
NK036012	1/2"	
NK036119	3/4"	



Hose Connector with Shut-Off Valve

CODE	HOSE	PRICE
NK033512	1/2"	
NK033619	3/4"	



Hose Coupler

)	CODE	HOSE	PRICE
	NK034012	ALL	



Revolving Elbow

CODE	BSP(Fm)	PRICE
NK031319	3/4"	



Hose Connector with Quick Coupler

CODE	HOSE	PRICE
NK038612	1/2"	
NK038719	3/4"	

HOSE CLIPS

Worm Drive Hose Clips

- Mild Steel Zinc Plated
- Flexible Hose Clip Driver for easy fitting



CODE	SIZE	PRICE EACH	BAG QTY	PRICE/ BAG
J008012	9.5-12mm (¾")		25	
J010016	11-16mm (½")		25	
J012020	13-20mm (%")		25	
J016025	17-25mm (¾")		25	
J022030	22-30mm (1")		25	
J030040	30-40mm (1½")		25	
J032050	35-50mm (2")		25	
J040060	45-60mm (2½")		25	
J060080	60-80mm (3")		10	
J090120	90-120mm		10	
JF	Flexible Hose			

Super Clips

- Low Carbon Steel Zinc Plated and passivated finish for protection
- Ideal for suction hose
- Also, layflat and high pressure applications
- Band edge rolled to prevent damage



CODE	SIZE	FIT	BAND WIDTH	BAND THICK	PRICE
SUPC017019	17-19mm		18mm	0.6mm	
SUPC020022	20-22mm		18mm	0.6mm	
SUPC023025	23-25mm		18mm	0.6mm	
SUPC026028	26-28mm		18mm	0.6mm	
SUPC029031	29-31mm		20mm	0.8mm	
SUPC032035	32-35mm		20mm	0.8mm	
SUPC036039	36-39mm		20mm	0.8mm	
SUPC040043	40-43mm		22mm	1.2mm	
SUPC048051	48-51mm		22mm	1.2mm	
SUPC052055	52-55mm	2"LAYFLAT	22mm	1.2mm	
SUPC056059	56-59mm	2"SUCTION HOSE	22mm	1.2mm	
SUPC061063	61-63mm		22mm	1.2mm	
SUPC064067	64-67mm		22mm	1.2mm	
SUPC068073	68-73mm		24mm	1.5mm	
SUPC074079	74-79mm		24mm	1.5mm	
SUPC080085	80-85mm	3"LAYFLAT	24mm	1.5mm	
SUPC086091	86-91mm	3" SUCTION HOSE	24mm	1.5mm	
SUPC092097	92-97mm		24mm	1.5mm	
SUPC098103	98-103mm		24mm	1.5mm	
SUPC104112	104-112mm	4"	24mm	1.5mm	
SUPC113121	113-121mm		24mm	1.5mm	
SUPC122130	122-130mm		24mm	1.5mm	
SUPC131139	131-139mm		26mm	1.6mm	
SUPC149161	149-161mm	6"LAYFLAT	26mm	1.6mm	
SUPC162174	162-174mm	6" SUCTION HOSE	26mm	1.6mm	
SUPC175187	175-187mm		26mm	1.6mm	

ARAD WATER METERS

Plastic Cold Water Meter

- Maximum pressure 10 bar
- Suitable for use with warm water (max. 50°C)




CODE	BSP(M)	MAX. FLOW	NOMINAL FLOW	PRICE
WMK050	1/2"	2m³/hr	1.6m³/hr	

Multi-Jet Magnetic Water Meter

Model M

- Maximum pressure 16 bar
- Suitable for use with warm water (max. 50°C)



CODE	BSP(M)	MAX. FLOW	NOMINAL FLOW	PRICE
WMK075	3/4"	5m³/hr 2.5m³/hr		
WMK100	1"	7m³/hr	3.5m³/hr	
WMK125	11/4"	12m³/hr	6m³/hr	
WMK150	1½″	20m³/hr	10m³/hr	
WMK200	2"	30m³/hr	15m³/hr	

Water Meter with Electrical Output Model M-ECM

Arad Water Meters equipped with electrical output device combine with high reliability of the hermetically sealed, magnetically driven register with a wide variety of electrical output options.

Reed Switch - Volume Output

Application Examples

- Remote Reading
- Flowrate Measuring
- Flowrate Control
- **Bi-directional Flow Measurement**



CODE BSP(M) WMP001075 3/4" WMP001100 1"		PULSE	PRICE
		1 pulse every litre	
		1 pulse every litre	
WMP001125	11/4"	1 pulse every litre	
WMP010150 1½"		1 pulse every 10 litres	
WMP010200	2"	1 pulse every 10 litres	

Irrigation & Agriculture Water Meter **Model IRT**

Special design with free water passage allows measurement of water with high contents of impurities.

- Maximum pressure 16 bar
- Can be installed in any position (horizontal, vertical or inclined)
- Max. liquid temperature 60°C
- Negligible head loss
- Simple maintenance
- Hermetically sealed register with glass lens
- Field replaceable measuring unit
- Bearings are constantly flushed during operation to eliminate deposit of solids
- Polyester coated cast iron body
- Optional electrical output: EV (Volume) or EF (Flow Rate)

Flanged PN16



CODE	SIZE	FLOW RATE	PRICE
WMI300F	3"-(DN80)	Max: 150m ³ /hr Nom: 90m ³ /hr	
WMI400F	4"-(DN100)	Max: 250m³/hr Nom: 125m³/hr	
WMI600F	6"-(DN150)	Max: 500m³/hr Nom: 250m³/hr	

Irrigation & Agriculture Water Meter Model WMR

The ample space around the core of the in-line helical axial turbine allows foreign matter to pass through the meter without clogging. Main application is for main supply lines, agriculture and industry.

- Maximum pressure 16 bar
- Can be installed in any position (for non-horizontal position the flow shall be upwards)
- Max. liquid temperature 55°C
- Minimum head loss
- High accuracy
- Hermetically sealed register with glass lens
- Not sensitive to dirt
- Polyester coated iron body
- Optional electrical output: EV (Volume) or EF (Flow Rate)

2" (50mm)



CODE	SIZE	FLOW RATE	PRICE
WMR200	2"	Max: 40m³/hr Nom: 20m³/hr	
WMR200E	2"	Electrical Output Version	

Calibration Certificates available on request

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

WATER STORAGE TANKS

Water Storage Tank Kits - Quality construction - easy onsite installation

Constructed from cold rolled galvanised steel sections (to BS2989) the tank kit comes complete with a tailor made liner in a choice of 0.75mm or 1.0mm EPDM or Butyl. They provide economical, permanent water storage solutions with capacities ranging from 1,600 litres to over 865,000 litres. The Tank Kits comprise the required steel sections and fittings including anchor brackets, wire tensioner, capping and clips.

EPDM 0.75mm and 1.0mm Water Tank Liners

EPDM has an exceptional resistance to UV and ozone ageing. With all the benefits of Butyl and better physical strength, EPDM is the choice for horticultural and sports ground irrigation. We recommend the use of 1.0mm EPDM for 4 ring high (3.05m or 10') water storage tanks.

Butyl 0.75mm and 1.0mm Water Tank Liners

Butyl is our most expensive rubber for tank lining and for most applications is now supersceded by our EPDM liner. Suitable for projects where budget restrictions do not apply.

Please state outlet hole size (2"-16" flanged) when ordering.





DIMENSIONS	CAPACITY	CAPACITY	CODE	STEEL AND	CODE	0.75mm	CODE	1.00mm
Ø x HEIGHT 9' x 2'6"	Gallons 990	Litres 4,555	WT091	FITTINGS	WTEL0913	EPDM LINER	WTEL0914	EPDM LINER
9'x 5'	1,980	9,100	WT092		WTEL0913		WTEL0914	
9'x 7'6"	3,000	13,500	WT092		WTEL0933		WTEL0934	
9'x 10'	4,000	18,000	WT094		WILLOSSS		WTEL0944	
12' x 2'6"	1,760	8,000	WT034 WT121		WTEL1213		WTEL1214	
12 X 2 0	3,530	16,000	WT121		WTEL1213		WTEL1214	
12′x 7′6″	5,280	24,000	WT122		WTEL1223		WTEL1234	
12'x 10'	7,000	32,000	WT123		WILLIZSS		WTEL1234	
15' x 2'6"	2,750	12,500	WT151		WTEL1513		WTEL1514	
15'x 5'	5,500	25,000	WT152		WTEL1513		WTEL1514	
15' x 7'6"	8,250	37,500	WT152 WT153		WTEL1523		WTEL1524	
15′x 10′	11,000	50,000	WT153		WILLISSS		WTEL1534	
18' x 2'6"	4,000	18,000	WT181		WTEL1813		WTEL1814	
18'x 5'	8,000	36,000	WT182		WTEL1823		WTEL1824	
18' x 7'6"	11,800	54,000	WT183		WTEL1833		WTEL1834	
18'x 10'	15,800	72,000	WT184		***************************************		WTEL1844	
21' x 2'6"	5,400	24,500	WT211		WTEL2113		WTEL2114	
21'x 5'	10,700	49,000	WT211		WTEL2113		WTEL2114	
21' x 7'6"	16,180	73,500	WT213		WTEL2123		WTEL2124	
21'x 10'	21,500	98,000	WT213		WILLEISS		WTEL2144	
24' x 2'6"	7,000	32,000	WT241		WTEL2413		WTEL2414	
24' x 5'	14,000	64,000	WT242		WTEL2423		WTEL2414	
24′ x 7′6″	21,000	96,000	WT242		WTEL2433		WTEL2434	
24'x 10'	28,180	128,000	WT244		WILLEASS		WTEL2444	
30' x 2'6"	11,000	50,000	WT301		WTEL3013		WTEL3014	
30' x 5'	22,000	100,000	WT302		WTEL3023		WTEL3024	
30' x 7'6"	33,000	150,000	WT303		WTEL3033		WTEL3034	
30'x 10'	44,000	200,000	WT304		***************************************		WTEL3044	
36' x 2'6"	15,800	72,000	WT361		WTEL3613		WTEL3614	
36' x 5'	31,600	144,000	WT362		WTEL3623		WTEL3624	
36' x 7'6"	47,560	216,000	WT363		WTEL3633		WTEL3634	
36'x 10'	63,400	288,000	WT364				WTEL3644	
48' x 2'6"	28,180	128,000	WT481		WTEL4813		WTEL4814	
48' x 5'	56,300	256,000	WT482		WTEL4823		WTEL4824	
48' x 7'6"	84,400	384,000	WT483		WTEL4833		WTEL4834	
48' x 10'	112,600	512,000	WT484				WTEL4844	
Manymoretanl		l '						

Many more tank sizes available on request

TANK COVERS

If you are surrounded by trees or a tall hedge then a tank cover is a necessary investment to prevent blockages due to wind-blown leaves etc.

Tank covers also help to eliminate the build up of algae in your irrigation water.

PVC COVER

PVC cover c/w central support is designed to cover and overlap the top edge of the tank. The ball valve flap allows access for the supply as well as access for sampling the water.



GALVANISED STEEL COVER

0.7mm Galvanised Sheets c/w 2 access hatches & ball valve cover. The cover prevents the growth of algae, stops evaporation and acts as a barrier to rainwater and wind borne debris.



ANTI-ALGAE COVER

Woven polypropylene c/w central support (18'+). Provides UV protection preventing algae growth and prevents wind-borne debris entering the water, whilst allowing rain water to permeate



TANK DIAMETER	CODE	GALV. STEEL COVER	CODE	ANTI-ALGAE COVER	CODE	PVC COVER
9′	WTCS09		WTCA09		WTPC09	
12′	WTCS12		WTCA12		WTPC12	
15′	WTCS15		WTCA15		WTPC15	
18′	WTCS18		WTCA18		WTPC18	
21′	WTCS21		WTCA21		WTPC21	
24′	WTCS24		WTCA24		WTPC24	
30′	WTCS30		WTCA30			
36′	WTCS36		WTCA36			
48'	WTCS48		WTCA48			

Ball Float Valves

- Male BSP threads
- Adjustable lever



CODE	DESCRIPTION	PRICE
BC050	Part 1 HP Float Valve ½" (Nylon Piston & Cone, Plastic Nuts)	
BC075	Part 1 HP Float Valve ¾"	
BC100	Part 1 HP Float Valve Bronze 1"	
BC125	Part 1 HP Float Valve Bronze 11/4"	
BC150	Part 1 HP Float Valve Bronze 1½"	
BC200	Part 1 HP Float Valve Bronze 2"	

Plastic Float

Brass inserts



CODE	DESCRIPTION	PRICE
BCFP04	4½" Plastic Float	
BCFP06	6" Plastic Float	
BCFP08	8" Plastic Float	
BCFP10	10" Plastic Float	
BCFP12	12" Plastic Float	

Hansen Tank Outlet

Steel Tank Take-off

- Galvanised Steel
- Male BSP threads
- 3 metal plates 2 rubber gaskets
- See page 164 for Gate Valves.





CODE	BSP	PRICE	CODE	BSP(M)	P
HANSFTF200	2"		WTTO2	2" (50mm)	
HANSFTF300	3″		WTTO3	3" (75mm)	
HANSFTF400	4"		WTTO4	4" (100mm)	

Ball Valve Bracket

For mounting Ball Float Valve (above) on edge of water storage tank.



CODE	SIZE	PRICE
EVTB08BV	Fit ½" - 1"	
EVTB10BV	Fit 11/4" - 11/2"	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

RESERVOIR LINERS



Removal of clay to create depth and reservoir banking.



Profiling of the reservoir, angles checked with satellite measuring.



Final measurement and grading taking place.



Overflow pipework installed providing maximum water retention.



Protective sheeting laid over reservoir structure and liner pulled out.



Liner positioned over protective sheeting and pulled up over all four sides.



Reservoir liner dug in, bank protection sheet installed for sunlight protection.



Finished reservoir with overflow and bank protection installed, aeration and pump transfer raft installed providing clear and uncontaminated water storage.

RAINWATER TANKS

Enduromaxx® Rainwater Tanks

Enduramaxx tanks are rotationally moulded as a 'one piece' tank.

- Manufactured from UV stabilised polyethylene, Enduramaxx tanks are tough and durable
- Ribbed design provides added strength and attractive appearance
- Enduramaxx tanks do not rust or corrode, are impact resistant and long lasting
- Guaranteed one-piece tank construction ensures long term structural strength
- Larger bulkheads available on request



CODE	CAPACITY	DIA. x HEIGHT (MM)	OUTLET	PRICE
WTMX00500	500 L	700 x 1500	1½″	
WTMX00720	720 L	700 x 2150	11/2"	
WTMX01250	1250 L	1200 x 1200	1½"	
WTMX02000	2000 L	1200 x 1960	1½″	
WTMX02500	2500 L	1400 x 1800	11/2"	
WTMX04000	4000 L	1900 x 1875	2″	
WTMX05000	5000 L	1900 x 2300	2″	
WTMX06000	6000 L	1900 x 2500	2″	
WTMX07000	7000 L	2450 x 1820	2″	
WTMX10000	10000 L	2400 x 2500	2″	
WTMX12500	12500 L	2600 x 2600	2″	
	WTMX00500 WTMX00720 WTMX01250 WTMX02000 WTMX02500 WTMX04000 WTMX05000 WTMX06000 WTMX07000 WTMX10000	WTMX00500 500 L WTMX00720 720 L WTMX01250 1250 L WTMX02000 2000 L WTMX02500 2500 L WTMX04000 4000 L WTMX05000 5000 L WTMX06000 6000 L WTMX07000 7000 L WTMX10000 10000 L	WTMX00500 500 L 700 x 1500 WTMX00720 720 L 700 x 2150 WTMX01250 1250 L 1200 x 1200 WTMX02000 2000 L 1200 x 1960 WTMX02500 2500 L 1400 x 1800 WTMX04000 4000 L 1900 x 1875 WTMX05000 5000 L 1900 x 2300 WTMX06000 6000 L 1900 x 2500 WTMX07000 7000 L 2450 x 1820 WTMX10000 10000 L 2400 x 2500	WTMX00500 500 L 700 x 1500 1½" WTMX00720 720 L 700 x 2150 1½" WTMX01250 1250 L 1200 x 1200 1½" WTMX02000 2000 L 1200 x 1960 1½" WTMX02500 2500 L 1400 x 1800 1½" WTMX04000 4000 L 1900 x 1875 2" WTMX05000 5000 L 1900 x 2300 2" WTMX06000 6000 L 1900 x 2500 2" WTMX07000 7000 L 2450 x 1820 2" WTMX10000 10000 L 2400 x 2500 2"

RAINWATER KITS

Connects to almost any downpipe in minutes! The following kits are supplied with Rainwater Filter Collector, comprising of a 1 metre flexible connection hose and Integrated Rainwater Collector / Filter / Overflow System. A 230v external pump, an access point on top and a filter basket inside. The system can be quickly and easily attached to square drainpipes with a cross section between 65mm and 100mm, and round downpipes with a cross section between 68mm and 100mm. Also fitted as standard is a dispensing tap.

CODE	KIT	SUITABLE FOR	PRICE
WTMX254010	Α	200m2 roof area and tanks up to 10,000 L	
WTMX254020	В	450m2 roof area and tanks up to 20,000 L	
WTMX254030	С	800m2 roof area and tanks up to 20,000 L	

ENDURAMAXX WATER TANKS

Larger sizes available up to 25000 L
Additional outlets available as optional extra
WRAS Approved Potable Water Tanks available with
Byelaw 30 Kit - specify when ordering

FERTIGATION

Dosatron D3GL-2 Green Line

Designed specifically for adding fertiliser

Operating pressure: 0.5 - 6.0 bar Flow rate: 0.16 - 50 lpm (max. 3.06 m³/hr) Inlet/Outlet: 3/4" BSP(M)

0.2% - 2.0% (1:500 - 1:50)

		T .
CODE	size m³/h	PRICE
DOSD3GL2	Dosatron D3 Green Line	

Dosatron D45-1.5

Also available with PVDF body and

external injection

Operating pressure: 0.5 - 5.0 bar Flow rate: 0.16 - 75 lpm (max. 4.58 m³/hr) Inlet/Outlet: 1¼" BSP(M)

0.2% - 1.5% (1:500 - 1:67)

	- 1-	
CODE	size m³/h	PRICE
DOSD4515	Dosatron D45-1.5	

Dosatron D9GL-2

Operating pressure: 0.15 - 8.0 bar Flow rate: 8 - 150 lpm (max. 9 m³/hr) Inlet/Outlet: 1½" BSP(M)

0.2% - 2.0% (1:500 - 1:50) 1.0% - 5.0% (1:100 - 1:20]

CODE	SIZE	PRICE
DOSD9GL2	Dosatron D9GL-2 [0.2-2.0%]	
DOSD8RE5	Dosatron D8RE-5 [1.0-5.0%]	
CODE	SIZE	PRICE

Dosatron D20GL

Operating pressure: 0.12 - 10.0 bar Flow rate: 16 - 333 lpm (max. 20 m³/hr) Inlet/Outlet: 63mm PVC

0.2% - 2.0% (1:500 - 1:50)

CODE	size m³/h	PRICE
DOSD20GL	Dosatron D20GL	

Dosatron D30GL1

Operating pressure: 1.0 - 8.0 bar Flow rate: 133 - 500 lpm (max. 30 m³/hr) Inlet/Outlet: 3" BSP(M) - 2 flanges DN80 ISO

0.1% - 1.0% (1000:1 - 100:1)



CODE	size m³/h	PRICE
DOSD30GL1	Dosatron D30GL1	

SUBMERSIBLE PUMPS



DRENOX - Stainless Steel Outer Case

Clean & black water only. Mostly for drainage and circulation duty.

Drenox range are centrifugal drainage pumps. All stainless steel. Supplied with 10m of power cable and hose tail. Twin NBR lip seal. For uses in drainage, clean, black water and circulation duties. Maximum submersion depth of 7 metres.

CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
PUR555001	80-6 MAN 110V	5.7 Kg	11⁄4″	4.8 m³/h	6 m	0.20	No	
PUR555003	80-6 MAN 230V	5.7 Kg	1¼″	4.8 m ³ /h	6 m	0.20	No	
PUR555006	80-6 AUTO 110V	5.8 Kg	1¼″	4.8 m ³ /h	6 m	0.20	Yes	
PUR555009	80-6 AUTO 230V	5.8 Kg	1¼″	4.8m³/h	6 m	0.20	Yes	
PUR555012	160-8 MAN 230V	6.5 Kg	1¼″	9.7 m ³ /h	7.5 m	0.40	No	
PUR555015	160-8 AUTO 230V	6.5 Kg	11⁄4″	9.7 m³/h	7.5 m	0.40	Yes	
PUR555017	250-10 MAN 230V	7.0 Kg	1¼″	15.2 m ³ /h	9.5 m	0.55	No	
PUR555022	250-10 AUTO 230V	7.0 Kg	1¼″	15.2 m ³ /h	9.5 m	0.55	Yes	
PUR555025	350-12 MAN 230V	8.5 Kg	1¼″	21.3 m ³ /h	11 m	0.80	No	
PUR555028	350-12 AUTO 230V	8.5 Kg	1¼″	21.3 m ³ /h	11 m	0.80	Yes	
PUR555029	350-12 T MAN 415V	8.5 Kg	11⁄4″	21.3 m ³ /h	11 m	0.80	No	

OMNIA - Stainless Steel Outer Case

Black water and solids up to 20mm. Ideal for cesspits, ponds, light sewage etc.

Omnia range are Vortex pumps. All stainless steel. Supplied with 10m of power cable and hose tail. Twin NBR lip seal. For uses in drainage, black water, cesspits, pond circulation and where soft solids in water are no bigger than 20mm. Maximum submersion depth of 7 metres.

١	CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
	PUR555031	80-5 MAN 230V	6.1 Kg	1¼″	4.8 m³/h	5 m	0.20	No	
	PUR555041	80-5 MAN 110V	6.1 Kg	1¼″	4.8 m³/h	5 m	0.20	No	
	PUR555033	80-5 AUTO 230V	6.1 Kg	11⁄4″	4.8 m ³ /h	5 m	0.20	Yes	
	PUR555035	80-5 AUTO 110V	6.1 Kg	1¼″	4.8 m ³ /h	5 m	0.20	Yes	
	PUR555037	160-7 MAN 230V	7.0 Kg	1¼″	9.7 m³/h	6.5 m	0.37	No	
	PUR555039	160-7 AUTO 230V	7.0 Kg	1¼″	9.7 m³/h	6.5 m	0.37	Yes	
	PUR555043	200-8 MAN 230V	8.5 Kg	1¼″	12.2 m ³ /h	8 m	0.50	No	
	PUR555050	200-8 MAN 110V	8.5 Kg	1¼″	12.2 m ³ /h	8 m	0.50	No	
	PUR555045	200-8 AUTO 230V	8.5 Kg	1¼″	12.2 m ³ /h	8 m	0.50	Yes	
	PUR555048	200-8 AUTO 110V	8.5 Kg	11⁄4″	12.2 m³/h	8 m	0.50	Yes	



BIOX/PRIOX 2" - Stainless Steel Outer Case

Sewage and waste water - up to 40mm diameter free passage through pump body.

Biox & Priox ranges are all stainless steel pumps used for pumping waste water containing soft solids up to 40mm. Supplied with 10m of power cable. Silicon seal followed by NBR lip seal. No hose tail is supplied. Maximum submersion depth of 7 metres.

CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
PUR555061	250/9 AUTO 230V	9.8 Kg	1½"	15.2 m³/h	9 m	0.60	Yes	
PUR555054	300/10 AUTO 230V	10.0 Kg	2"	18.3 m ³ /h	10 m	1.30	Yes	
PUR555057	400/12 AUTO 230V	11.0 Kg	2"	24.4 m ³ /h	12 m	1.60	Yes	
PUR555065	420/11 MAN 230V	11.2 Kg	2"	25.6 m ³ /h	11 m	0.90	No	
PUR555064	420/11 AUTO 230V	11.2 Kg	2"	25.6 m ³ /h	11 m	0.90	Yes	
PUR555063	420/11 MAN 400V	11.2 Kg	2"	25.6 m ³ /h	11 m	0.90	No	
PUR555062	460/13 MAN 230V	11.7 Kg	2"	28.1 m ³ /h	13 m	1.10	No	
PUR555066	460/13 AUTO 230V	11.7 Kg	2″	28.1 m³/h	13 m	1.10	Yes	
PUR555067	460/13 MAN 400V	11.7 Kg	2"	28.1 m³/h	13 m	1.10	No	
PUR555068	600/13 MAN 400V	12.6 Kg	2"	36.6 m ³ /h	12.6 m	1.20	No	
PUR555069	800/18 MAN 400V	20.2 Kg	2"	48.8 m³/h	18 m	2.40	No	

VIP, VORT & COMPAC - Light Duty Only

VIP - series designed for applications in clean water. Emptying of cellars, rain water collection tanks and decorative garden fountains are examples.

VIPVORT - series are designed for applications in dirty water with suspended soft solids up to 20mm - polypropylene.

COMPAC - designed for use in clean water to drain domestic applications. Ideal for limited spaces. Complete with integral float switch, which can be selected in auto or manual mode. In auto mode the pump switches on when the water level reaches 140mm and switches off at 30mm. In manual mode the water can pumped down to approx 3mm.

KÄRCHER SDP7000 - Entry level water pump designed to remove dirty water with particles up to a max size 20mm.

	CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
	PUR020070	VIP 130/6 M 230V	4.1 Kg	11⁄4″	7.9 m³/h	6 m	0.32	No	
	PUR020072	VIP 130/6 A 230V	4.1 Kg	11⁄4″	7.9 m³/h	6 m	0.32	Yes	
	PUR020076	VIP 180/7 A 230V	4.5 Kg	11/4"	11.0 m ³ /h	7 m	0.37	Yes	
	PUR020080	VIPVORT 130/5 M 230V	4.0 Kg	11⁄4″	7.9 m³/h	5 m	0.37	No	
	PUR020086	VIPVORT 180/6 A 230V	4.5 Kg	11⁄4″	11.0 m ³ /h	6 m	0.48	Yes	
	PUR020090	COMPAC 150 230V	4.7 Kg	11⁄4″	8.1 m³/h	7 m	0.30	Integral	
	PUR020092	COMPAC 150 110V	4.7 Kg	11⁄4″	8.1 m³/h	7 m	0.30	Integral	
	PUR020094	COMPAC 200 230V	5.6 Kg	11⁄4″	11.3 m ³ /h	10 m	0.65	Integral	
4	KARSP3	KARCHER SP 3 DIRT	4.2 Kg	11⁄4″	7.1 m³/h	6 m	0.35	Yes	

JS-SV - Soft Solids Handling Vortex Pumps

A very popular and robust pump for dirty liquids.

JS-150 SV - 25mm soft solids handling. Plastic motor lid, lower motor/bearing housing and impellor. Stainless steel shaft and outer motor casing. Cast iron seal chamber cover. Single silicon mechanical seal.

JS-250 SV - 36mm soft solids handling. Cast iron motor lid, lower motor/bearing/seal housing, impeller and pump chamber. Stainless steel shaft and outer motor casing. Twin mechanical seals in a lubricated chamber.

All models complete with 10m power cable. Add a MAC3 or AGMA Magnetic Float Switch for £40.00 + VAT.

CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
PUR011150	JS-150 SV M 230V	5.5 Kg	11⁄4″	7.2 m³/h	6.5 m	0.15	No	
PUR011152	JS-150 SV M 110V	5.5 Kg	11⁄4″	7.2 m³/h	6.5 m	0.15	No	
PUR011250	JS-250 SV M 230V	15 Kg	11⁄4″	10.9 m ³ /h	6.5 m	0.25	No	
PUR011252	JS-250 SV M 110V	15 Kg	11⁄4″	10.9 m³/h	6.5 m	0.25	No	

RS - Stainless Steel Outer Case

Top outlet, twin mechanical seals, carbon ceramic and silicone carbide in a lubricated chamber. Stainless steel outer case, shaft and motor case. Cast iron lower motor bearing/seal housing, motor top cover and volute. Complete with 10m power cable and hose tail. Suitable for water features, draining applications, clean and dirty water.

Add a MAC3 or AGMA Magnetic Float Switch for £40.00 + VAT.

CODE	ТҮРЕ	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
PUR010150	RS-150 M 230V	13.0 Kg	11⁄4″	7.2 m ³ /h	7.5 m	0.15	No	
PUR010250	RS-250 M 230V	13.0 Kg	1½"	10.9 m³/h	9 m	0.25	No	
PUR010400	RS-400 M 230V	13.2 Kg	2"	14.5 m³/h	11.5 m	0.40	No	
PUR010550	RS-550 M 230V	19.4 Kg	2"	19.5 m³/h	11 m	0.55	No	
PUR010552	RS-550 M 110V	19.4 Kg	2"	19.5 m³/h	11 m	0.55	No	
PUR010750	RS-750 M 230V	19.6 Kg	2"	25.4 m³/h	15 m	0.75	No	
PUR010752	RS-750 M 110V	19.6 Kg	2"	25.4 m³/h	15 m	0.75	No	

RSD - Residue Drainage Pump (puddle sucker - down to 1mm)

Top outlet with step down hose tail 25mm, 19mm and 15mm. The main feature of this pump is the ability to drain down to approx 1mm whilst remaining flood water can be swept into the pump for removal.

Stainless steel outer casing, motor pack and shaft. Cast iron motor lid, pump casing and volute. Equipped with non return valve on the suction of the pump to stop any return of water. Bottom plate made with cushioned rubber to prevent damage to bottom of tanks. Supplied with 10m power cable.

CODE	ТҮРЕ	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
PUR012400	RSD-400 M 230V	14.0 Kg	11⁄4″	14.5m³/h	11.5 m	0.40	No	
PUR012402	RSD-400 M 110V	14.0 Kg	11⁄4″	14.5m³/h	11.5 m	0.40	No	







SEWAGE & WASTE WATER PUMPS



JS & JS High Head Heavy Duty Contractor Pumps - Single Phase

Suitable for drainage applications in clean and dirty water. Twin mechanical seals, one carbon and one silicon in a lubricated chamber. Stainless steel shaft and motor case. Cast iron motor top cover, lower motor bearing/seal housing, pump case, impeller and volute. Comes complete with 10m of power cable and hose tail.

Add a MAC3 or AGMA Magnetic Float Switch for £40.00 + VAT.

	CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
PU	R011400	JS-400 M 230V	15.0 Kg	2″	15.2 m ³ /h	11 m	0.40	No	
PU	R011402	JS-400 M 110 V	15.0 Kg	2″	15.2 m ³ /h	11 m	0.40	No	
PUF	R0117502	JS-750 M 230V	27.0 Kg	2″	24.1 m ³ /h	15 m	0.75	No	
PUF	R0117522	JS-750 M 110V	27.0 Kg	2″	24.1 m ³ /h	15 m	0.75	No	
PUF	R0117503	JS-750 M 230V	27.0 Kg	3″	24.1 m ³ /h	15 m	0.75	No	
PUF	R0117523	JS-750 M 110V	27.0 Kg	3″	24.1 m ³ /h	15 m	0.75	No	
PU	R011760	JS-1500 M 230V	32.0 Kg	3″	43.6 m ³ /h	19 m	1.50	No	
PU	R011764	JS-1500H M 230V	32.0 Kg	2″	30.0 m ³ /h	23 m	1.50	No	



JS-SK - Single Channel Cutter Impeller

Submersible sewage cutter impeller pumps. Available as free standing or can be guide rail mounted. Single channel tungsten carbide tipped impellor capable of cutting soft solids into smaller parts to pump through the body to waste. Cast iron pump body, volute stand, impellor, lower motor bearing/seal housing and motor top cover. Stainless steel shaft and motor casing. Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Supplied with hose tails and 10m of power cable.

Add a MAC3 or AGMA Magnetic Float Switch for £40.00 + VAT.

	CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
	PUR012757	JS-750SK M 230V	29.4 Kg	2"	24.1 m ³ /h	15 m	0.75	No	
ĺ	PUR012758	JS-750SK M 110V	29.4 Kg	2"	24.1 m ³ /h	15 m	0.75	No	
	PUR011776	JS-1500SK M 230V	36.4 Kg	3″	48.6 m ³ /h	18 m	1.50	No	



JS Drainer - All 316 Stainless Steel Pump

These are precision cast 316 all stainless steel pumps. Comes complete with 10m of power cable and hose tail.

Add a MAC3 or AGMA Magnetic Float Switch for £40.00 \pm VAT.

CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
PUR011300	JS-250 M 230V	12.0 Kg	11/2"	12.2 m ³ /h	9 m	0.25	No	
PUR011308	JS-400 M 230V	15.0 Kg	2"	14.6 m ³ /h	11 m	0.40	No	
PUR011316	JS-400 M 230V 60Hz	15.0 Kg	2″	14.6 m ³ /h	11 m	0.40	No	

WELL & BOREHOLE PUMPS



ECO DIVER & DIVERTRON - Multistage Pumps

Eco Diver is suitable to pump clean water with no suspended solids or abrasive materials. Manufactured with anti-corrosive and rust proof materials. Supplied with 15 metre cable, non return valve and step adaptor hose fitting. Divertron 1200 is the same as the Eco Diver but has built-in electronics, pressure switch and flow sensor designed to automitcally start and stop the pump. Also with dry run protection.

- High pressure
- High flow
- Rain water systems
- Sprinklers
- Tanks

CODE	TYPE	KG	(HxWxL) mm	LM/HM	ELECTRIC	PRICE
PUR022832	ECO DIVER AUTO	9.0	400x150x150	95/48	230v (1.10kW)	
PUR022835	DIVERTRON	11.0	480x150x150	95/48	230v (1.10kW)	

SEWAGE & WASTE WATER PUMPS - 3ph

JST & JST High Head - Three Phase

Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Stainless steel shaft and motor case. Cast iron motor top cover, lower motor/seal housing, pump case, impellor and volute. Complete with 10m of power cable. Hose tails supplied with all models apart from the JST-37, 55 & 75. Hose tails are supplied with the high head versions. Suitable for drainage applications in clean and dirty water.

CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
PUR011004	JST-4 M 400V	10 Kg	2"	230 lpm	11.5 m	0.40	No	
PUR0110082	JST-8 M 400V	25 Kg	2"	350 lpm	14.5 m	0.80	No	
PUR0110083	JST-8 M 400V	25 Kg	3″	350 lpm	14.5 m	0.80	No	
PUR011015	JST-15 M 400V	27 Kg	3″	565 lpm	18 m	1.50	No	
PUR011019	JST-15H M 400V	27 Kg	2"	435 lpm	22 m	1.50	No	
PUR011022	JST-22 M 400V	39 Kg	3″	865 lpm	20 m	2.20	No	
PUR011023	JST-22H M 400V	39 Kg	2"	745 lpm	25 m	2.20	No	
PUR011037	JST-37 M 400V	45 Kg	4"	1375 lpm	24 m	3.70	No	
PUR011039	JST-37H M 400V	45 Kg	2"	805 lpm	32 m	3.70	No	
PUR011055	JST-55 M 400V	90 Kg	4"	1945 lpm	27 m	5.50	No	
PUR011075	JST-75 M 400V	95 Kg	6"	1970 lpm	33 m	7.50	No	
PUR011077	JST-75H M 400V	95 Kg	4"	1290 lpm	44.5 m	7.50	No	



JST-SV - Vortex Impeller Three Phase

Submersible sewage vortex impeller pumps allowing soft solids to be passed through the pump body to waste. Available as free standing as standard or can be guide rail mounted. Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Stainless steel shaft and motor case. Cast iron motor top cover, lower motor/seal housing, pump case, impeller and volute.

CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	SOLIDS	PRICE
PUR012698	JST-4SV M 400V	15.4 Kg	2"	250 lpm	8.5 m	0.40	36mm	
PUR012768	JST-8SV M 400V	29.4 Kg	3"	450 lpm	8 m	0.75	36mm	
PUR012774	JST-15SV M 400V	36.6 Kg	3″	720 lpm	12 m	1.50	46mm	
PUR011026	JST-22SV M 400V 2 Pole	52.2 Kg	3″	1000 lpm	18 m	2.20	65mm	
PUR011025	JST-22SV M 400V 4 Pole	59.6 Kg	3″	1300 lpm	8 m	2.20	65mm	
PUR012788	JST-55SV M 400V 4 Pole	125 Kg	4"	2650 lpm	14 m	5.50	80mm	
PUR012792	JST-75SV M 400V 4 Pole	135 Kg	4"	3175 lpm	15.5 m	7.50	80mm	



JST-SK - Three Phase Single Channel Cutter Impeller

Submersible sewage cutter impeller pumps. Available as free standing or can be guide rail mounted. Single channel tungsten carbide tipped impellor capable of cutting soft solids into smaller parts to pump through the body to waste. Cast iron pump body, volute stand, impellor, lower motor bearing/seal housing and motor top cover. Stainless steel shaft and motor casing. Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Supplied with hose tails (except models JST-37, 55 & 75) and 10m of power cable.

CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	FLOAT	PRICE
PUR012780	JST-8SK M 415V	27.8 Kg	2"	24.1 m ³ /h	15 m	0.75	No	
PUR012782	JST-15SK M 415V	37.6 Kg	3″	48.8 m³/h	17.5 m	1.50	No	
PUR012784	JST-22SK M 415V	49.8 Kg	3"	60.9 m³/h	20 m	2.20	No	
PUR012786	JST-37SK M 415V	55.0 Kg	4"	73.2 m ³ /h	25 m	3.70	No	
PUR012790	JST-55SK M 415V	76.0 Kg	4"	110.0 m ³ /h	22 m	5.50	No	



sales: 01772 812484 fax: 01772 815417 sales:@lssystems.co.uk www.lssystems.co.uk

ENGINE PUMPS



Engine Pumps - Honda Petrol Powered with Oil Alert

ldeal for clean and black water applications, construction and agricultural duties. Heavy duty build with iron impellor and volute, carbon/ceramic mechanical seal in full crash frame.

NB, SEH-25L & SEH-25H do NOT have Oil Alert.

CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	МН	ENGINE	SOLIDS	PRICE
PUR050016	SEH-25L	7.0 Kg	1″	115 lpm	32 m	Honda GX25 2.0HP	5 mm	
PUR050015	SEH-25H	15.0 Kg	1″	135 lpm	43 m	Honda GXH50 2.0HP	5 mm	
PUR050022	SEH-50x	24.0 Kg	2″	620 lpm	30 m	Honda GX120 4.0HP	5 mm	
PUR050032	SEH-80x	32.0 Kg	3″	900 lpm	26 m	Honda GX160 5.5HP	7 mm	
PUR050038	SEH-100x	55.0 Kg	4"	1,450 lpm	28 m	Honda GX240 8.0HP	9 mm	

Trash Engine Pumps - Honda Petrol Powered with Oil Alert

Semi-Trash pumps with FCD (Spheroidal Iron Impellor) and volutes and also a SIC Mechanical Seal for aggressive applications. Solids handling ability 8mm.

Trash duty pumps for sewage and muck. Large easy-off front cover for cleaning, SIC Mechanical Seals and Chrome Impellor and Spheroidal Graphite Iron Impellor. Solids handling up to 2" - 20mm; 3" - 27mm; 4" - 30mm.

CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	МН	ENGINE	SOLIDS	PRICE
PUR050028	STH-50X	25.0 Kg	2″	600 lpm	29 m	Honda GX120 4.0HP	8 mm	
PUR050048	STH-80X	35.0 Kg	3″	900 lpm	26 m	Honda GX160 5.5HP	9 mm	
PUR050074	KTH-50X	51.0 Kg	2"	700 lpm	30 m	Honda GX160 5.5HP	20 mm	
PUR050076	KTH-80S	67.0 Kg	3″	1,450 lpm	27 m	Honda GX240 8.0HP	27 mm	
PUR050078	KTH-100S	83.0 Kg	4"	2,050 lpm	30 m	Honda GX340 11.0HP	30 mm	



Honda Engine Petrol Powered with Oil Alert High Pressure Pumps

Honda powered high pressure pumps, compact in design with excellent flow and high pressure they are suitable for irrigation transfer and dust suppression. They come in a sturdy crash frame and wheel kit to make them more portable to move around.

CODE	TYPE	WEIGHT	OUTLET	MAX. FLOW	МН	ENGINE	SOLIDS	PRICE
PUR050042	SERH-50B	35.0 Kg	2"	440 lpm	57 m	Honda GX160 5.5HP	1 mm	
PUR050072	SERH-50	47.0 Kg	2½"x 2"	560 lpm	62 m	Honda GX240 8.0HP	1 mm	
PUR050045	SERH-50V	39.0 Kg	2"	430 lpm	80 m	Honda GX160 5.5HP	1 mm	



Diesel Powered Pump

High performance Koshin pumps mounted to 'recoil start' Robin engines. For clean and black water. Electric start version available with Hatz "X" type engine - includes battery in frame.

High performance High Head Koshin pumps mounted to Robin diesel engines. For clean water irrigation duty only. Electric start models available.

CODE	TYPE	WEIGHT	PORTS	MAX. FLOW	МН	ENGINE	SOLIDS	PRICE
PUR050070HR	SE-50XDHR	55.0 Kg	2"	560 lpm	23 m	Hatz 1B20 5.0HP	5 mm	
PUR050075	SE-80XD	51.0 Kg	3″	900 lpm	23 m	Robin DY23 5.0HP	7 mm	
PUR050075HR	SE-80XDHR	58.0 Kg	3″	900 lpm	23 m	Hatz 1B20 5.0HP	7 mm	
PUR050070HES	SE-50XDHES Electric Start	65.0 Kg	2" x 2"	560 lpm	23 m	Hatz 1B20 5.0HP	5 mm	
PUR050075HES	SERH-80DHES Electric Start	68.0 Kg	3"x 3"	900 lpm	23 m	Hatz 1B20 5.0HP	7 mm	

Many more engine pumps available on request including diaphragm pumps and heavy duty compressor or vacuum prime contractor pumps for utility use, flood protection and models with acoustic canopies.

PUMP CONTROL EQUIPMENT

For the safe and efficient operation of pumps a control panel is required.

Our standard panels include electrical protection against overload and protection against dry running via a float switch.

For single phase (up to 2.2kW) and smaller 3 phase (up to 5.5kW) pumps we offer Direct-On-Line Starter Panels. For larger motors we can offer assisted starting via Soft Starting on Star Delta.



For all 3 phase pumps we recommend Variable Speed Control. This energy efficient system not only delivers constant pressure without fluctuations, also reduces power usage and can prolong the life of pumps and associated pipe work.

All of our panels are built in-house to client specification and conform to BS61439-1.



Overload protection
Door interlock isolator
Low water protection
Terminals for connecting pressure switch,
start signal from irrigation controller etc
Fascia mounted status lamps



OPTIONAL EXTRAS:

- A range of alarms including flashing beacon, audible alarm, text message
- Over/under pressure cutout/alarm
- No-flow cutout/alarm;
- over/under flow cutout/alarm
- Integration with transfer pumps
- Integration with irrigation control system software
- Automatic priming pump control
- Outputs for automatic storage tank filling
- Touchscreen display & control
- Remote control via text messaging
- RCD protection
- · Timer controls
- Many more...



GRP HOUSINGS

Standard Double Door Range

All GRP housings are moulded in Glass Reinforced Plastic (GRP) composite using self-extinguishing, fire retardent resin, tested to BS476: Part 7, Class 2.

All housings offered as standard:

- Cylinder night latch or Stainless steel hasp & staple for your own padlock
- 316 Stainless steel hinges.
- 18mm WBP treated hardwood plywood mounting backboards.
- Doors are reinforced to provide a high level of security and are dust and weather proofed to IP54.
- Cabinets have a semi-gloss surface and standard colours are from BS4800 range: GREEN (14-C-39) and GREY (10-A-07). Additional colours are available on request.

GRP6 & GRP7 have an integral GRP membrane floor. The rest of the standard double door range have an open base with a 100mm reinforced integral base flange for bolting to the preformed concrete base.

Spring tower bolts for retaining the secondary door leaf in its closed posi-



CODE	WIDTH	DEPTH	HEIGHT	PRICE
NKGRP06	1080 mm	400 mm	1280 mm	POA
NKGRP07	1080 mm	680 mm	1280 mm	POA
NKGRP08	1300 mm	400 mm	1250 mm	POA
NKGRP09	1400 mm	660 mm	1515 mm	POA
NKGRP10	1700 mm	800 mm	1600 mm	POA
NKGRP11	2000 mm	500 mm	1600 mm	POA
NKGRP12	2000 mm	800 mm	1600 mm	POA

CONTROL EQUIPMENT

Basic Floats for Pumps

Basic floats to mount on standard "cabtyre' cable entry. For replacement and retrofit applications to submersible pumps.

- AGMA 22 c/w 10 m Cable
- MAC-3 Float & Gland



CODE	ТҮРЕ	Kg	PRICE
PUR020003	AGMA 22 10 m	1.2	
PUR020001	MAC-3	0.5	

Minimatic Float Switches

MICROSTART-I Single Action

Simple single action float for emptying operations. 2 core connection.

MINIMATIC-C Double Action

Double action float for emptying or filling operations. 3 core connection.



CODE	TYPE	Kg	CABLE	PRICE
PUR030549		0.5	0.5 m	
PUR030550	Microstart-l	0.7	5 m	
PUR030552	Cin ala	1.1	10 m	
PUR030554	Single Action Float	1.5	15 m	
PUR030556		1.9	20 m	
PUR030558		2.0	30 m	
PUR030562		0.7	5 m	
PUR030564	Minimatic-C Double Action Float	1.1	10 m	
PUR030566		1.5	15 m	
PUR030568		1.9	20 m	
PUR030570		3.0	30 m	

Metal Woven Hose

For connection from pressure vessel to brass multiway coupling in pressure sets. With a high bending radius and rubber lined. 1"(MxFm) BSP.



CODE	LENGTH	PRICE
MWH100050	500mm	
MWH100060	600mm	
MWH100080	800mm	
MWH100100	1000mm	

Brass Multiway Fitting 5-Way (1"x1"x1"x4"x 14")

5-way (| X | X | X | X | 4 | X | 4 |

Pump in, pump out, pressure vessel in, pressure switch & gauge.



CODE	PRICE
BS920074	

Expansion Vessel for Pressurised Systems

An irrigation system contains considerable kinetic energy from moving liquid. When a valve is turned on or off, energy is released which cannot be absorbed by the liquid. The result is an expansion in the pipework which can lead to failure. An expansion vessel is the answer. The kinetic energy is absorbed within the vessel by a membrane inside a pressurised cushion of air.

The air pressure within the vessel must be set to 2 psi less than the minimum cut-in setting of the connected pressure switch.



VERTICAL 10 Bar

CODE	SIZE	PRICE
PUR022551	5L No Mount ¾"	
PUR022552	8L No Mount ¾"	
PUR022553	25L No Mount 1"	
PUR022557	60L Vertical 1″	
PUR022560	100L Vertical 1"	
PUR022590	200L Vertical 1"	
PUR022620	300L Vertical 1"	
PUR022622	500L Vertical 1"	

VERTICAL 16 Bar

CODE	SIZE	PRICE
PUR022631	24L No Mount 1"	
PUR022632	100L Vertical 1"	
PUR022634	200L Vertical 11/4"	
PUR022635	300L Vertical 11⁄4"	
PUR022636	500L Vertical 2"	

HORIZONTAL 10 Bar

CODE	SIZE	PRICE
PUR022554	25L Horizontal 1"	
PUR022556	60L Horizontal 1"	
PUR022559	100L Horizontal 1"	
PUR022580	200L Horizontal 1"	
PUR022610	300L Horizontal 1"	

Replacement Bladders/Membranes

CODE	CAPACITY	PRICE
PUR022532	5-8L	
PUR022534	25L	
PUR022536	60-100L	
PUR022538	200L	
PUR022540	300L	
PUR022542	500L	
PUR022543	500L 16 BAR	

PUMP ACCESSORIES

Pressure Boosting Control Units

Used to start, stop and control small pumps in the field of water supply. It not only controls the pump unit, it also protects the pump against hydraulic, electrical and mechanical failure and prevents dry running of pumps. They can be fitted to almost any pump with an outlet pressure of 2 bar minimum to 10 bar maximum with a flow rate of between 40 & 200 litres per minute. Suitable for most water systems from well, tank or low pressure mains. The Controlpress is also pressure adjustable. Ask us about fitting to a pump of your choice.

CODE	TYPE	Kg	SIZE DIMENSIONS		MAX kW/Amp	PRICE
PUR060430	PRESSCONTROL 230V	1.4	1″	165 x 170 x 230mm	1.5/8	
PUR060429	PRESSCONTROL 110V	1.4	1″	165 x 170 x 230mm	0.75/8	
PUR060438	CONTROLPRESS 230V	2.6	11⁄4″	175 x 210 x 300mm	2.2/16	



Dry Pressure Gauges

63mm Case: Connection: brass Case: black steel

Bourdon tube: copper alloy up to 40 bar;

phosphorous bronze from 60 bar

Window: polycarbonate aluminium (black) Pointer: Dial: aluminium (white)



CODE	TYPE	CONNECTION	PRICE
PGA04B	0 - 4 Bar (0 - 60 psi)		
PGA06B	0 - 6 Bar (0 - 90 psi)	1/4"(MBSP)	
PGA010B	0 - 10 Bar (0 - 150 psi)	bottom connection	
PGA016B	0 - 16 Bar (0 - 240 psi)		
PGA04R	0 - 4 Bar (0 - 60 psi)		
PGA06R	0 - 6 Bar (0 - 90 psi)	1/4"(MBSP)	
PGA010R	0 - 10 Bar (0 - 150 psi)	tion	
PGA016R	0 - 16 Bar (0 - 240 psi)		

Condor Membrane Pressure Switch

3-pole, 25 amp, 500V - 5.5 kW

Connection: 1/2"(FBSP)



CODE	TYPE	PRESSURE	PRICE
BS920090	MDR 5 / 5	1.5 - 5 bar	
BS920091	MDR 5 / 8	2 - 8 bar	
BS920092	MDR 5 / 11	2 - 11 bar	

Liquid Filled Pressure Gauges

63mm; 1.6% accuracy class

Connection: brass

Case: stainless steel

Bourdon tube: copper alloy up to 40 bar;

phosphorous bronze from 60 bar

Window: polycarbonate aluminium (black) Pointer: Dial: aluminium (white)



CODE	TYPE	CONNECTION	PRICE
PGO0010B	0 - 1 bar (0 - 15 psi)		
PGO0020B	0 - 2 bar (0 - 30 psi)		
PGO0040B	0 - 4 bar (0 - 60 psi)		
PGO0060B	0 - 6 bar (0 - 90 psi)		
PGO0100B	0 - 10 bar (0 - 150 psi)	1⁄4"(MBSP)	
PGO0160B	0 - 16 bar (0 - 240 psi)	bottom connection	
PGO0250B	0 - 25 bar (0 - 375 psi)		
PGO0400B	0 - 40 bar (0 - 600 psi)		
PGO0600B	0 - 60 bar (0 - 900 psi)		
PGO1000B	0 - 100 bar (0 - 1500 psi)		
PGO0040R	0 - 4 bar (0 - 60 psi)		
PGO0060R	0 - 6 bar (0 - 90 psi)	1/4"(MBSP) centre back connec-	
PGO0100R	0 - 10 bar (0 - 150 psi)	tion	
PGO0160R	0 - 16 bar (0 - 240 psi)		

Adjustable Pressure Switch

Connection: 1/4"(FBSP)



CODE	ТҮРЕ	PRESSURE	PRICE
PSW0212B240	PM/12 250V 16a	2 - 12 bar	
PSW0105B240	PM/5 250V 16a	1 - 5 bar	
PSW0105B400	PT/5 400V 16a	1 - 5 bar	

Fantini Pressure Switch

Fantini give you precise control with setting on/off and differential pressure by the aid of visual gauges.

Connection: ¼"(FBSP)



CODE	TYPE	PRESSURE	PRICE
PUR060414	Fantini B12CN	0.2 - 8 bar	
PUR060416	Fantini B12DN	5 - 16 bar	

SURFACE MOUNTED PUMPS



sales: 01772 812484

Multi EVO Centrifugal Multistage Pumps

Multi-EVO horizontal multistage pumps produce high flow and pressure in performance. NOT self priming and should not be allowed to run dry. Technopolymer impellors and diffusers. Clean water only with no solids or abrasives and a maximum liquid temperature of 50°C. Examples of use include water pressure boosting, washing and irrigating. Multi EVO pre-built booster sets also available on request.

CODE	TYPE	WEIGHT	PORTS	MAX. FLOW	LM/HM	kW	PRICE
PUR022210	Multi EVO 3-30M 230V	7.0 Kg	1" x 1"	4.5 m ³ /h	80/36	0.40	
PUR022215	Multi EVO 3-30T 400V	7.0 Kg	1" x 1"	4.5 m ³ /h	80/36	0.40	
PUR022220	Multi EVO 3-40M 230V	7.0 Kg	1" x 1"	4.5 m ³ /h	80/46	0.55	
PUR022225	Multi EVO 3-40T 400V	7.0 Kg	1" x 1"	4.5 m ³ /h	80/46	0.53	
PUR022027	Multi EVO 3-50M 230V	9.0 Kg	1" x 1"	4.5 m ³ /h	80/58	0.70	
PUR022029	Multi EVO 3-50T 400V	9.0 Kg	1" x 1"	4.5 m ³ /h	80/58	0.70	
PUR022026	Multi EVO 3-60M 230V	11.0 Kg	1" x 1"	4.5 m ³ /h	80/67	0.90	
PUR022030	Multi EVO 3-60T 400V	11.0 Kg	1" x 1"	4.5 m ³ /h	80/67	0.82	
PUR022230	Multi EVO 5-40M 230V	9.0 Kg	1" x 1"	7.2 m³/h	120/46	0.75	
PUR022235	Multi EVO 5-40T 400V	9.0 Kg	1" x 1"	7.2 m³/h	120/46	0.75	
PUR022240	Multi EVO 5-50M 230V	11.0 Kg	1" x 1"	7.2 m³/h	120/58	0.95	
PUR022245	Multi EVO 5-50T 400V	11.0 Kg	1" x 1"	7.2 m³/h	120/58	0.90	
PUR022247	Multi EVO 5-60M 230V	14.0 Kg	1¼" x 1¼"	11.8 m³/h	120/69	1.20	
PUR022010	Multi EVO 5-60T 400V	14.0 Kg	1¼" x 1¼"	11.8 m³/h	120/69	1.20	
PUR022248	Multi EVO 8-40M 230V	14.0 Kg	1¼" x 1¼"	11.8 m³/h	200/44	1.20	
PUR022012	Multi EVO 8-40T 400V	14.0 Kg	1¼" x 1¼"	11.8 m³/h	200/44	1.18	
PUR022241	Multi EVO 8-50M 230V	15.0 Kg	1¼" x 1¼"	11.8 m³/h	200/56	1.40	
PUR022249	Multi EVO 8-50T 400V	15.0 Kg	1¼" x 1¼"	11.8 m³/h	200/56	1.40	

Multi-EVO-A Self-Priming Multistage Centrifugal Pumps



CODE	TYPE	WEIGHT	PORTS	MAX. FLOW	MAX. HEAD	kW	PRICE
PUR022190	Multi EVO-A 3-40M 230V	7.3 Kg	1"x 1"	4.8 m³/h	42.5 m	0.51	
PUR022194	Multi EVO-A 5-50M 230V	10.6 Kg	1" x 1"	7.2 m³/h	56.0 m	0.95	
PUR022196	Multi EVO-A 5-50T 400V	10.6 Kg	1" x 1"	7.2 m³/h	56.0 m	0.90	

Jet Pump - Traditional Cast Iron - Self Priming

Cast iron pump body and motor bracket. Impellor, diffuser and venturi system made from technopolymer (Jet 100-68/80 impellors made from brass). Clean water only with a maximum temperature of 50°C. Maximum suction height of 7 metres with footvalve. Main uses include booster systems, washing systems and garden irrigation.

CODE	TYPE	WEIGHT	PORTS	MAX. FLOW	MAX. HEAD	kW	PRICE
PUR022280	JET 1000 230V	17.8 Kg	1″	4.2 m ³ /h	50 m	1.00	
PUR022284	JET 1000 415V	17.8 Kg	1"	4.2 m³/h	50 m	1.00	
PUR022282	JET 1000 110V	17.8 Kg	1″	4.2 m ³ /h	50 m	1.00	
PUR022292	JET 100-68 230V	29.4 Kg	1½″x 1″	5.9 m³/h	68 m	2.00	
PUR022293	JET 100-68 415V	29.4 Kg	1½″ x 1″	5.9 m³/h	68 m	2.00	
PUR022294	JET 100-80 415V	31.0 Kg	1½″x 1″	5.9 m³/h	80 m	2.50	



Jet Pump - Stainless Steel - Self Priming

Impellor, diffuser/venturi system made from technopolymer. Clean water only with a maximum temperature of 50°C. Maximum suction height of 7 metres with footvalve. Main uses include booster systems, washing systems and garden irrigation.

CODE	ТҮРЕ	WEIGHT	OUTLET	MAX. FLOW	MAX. HEAD	kW	PRICE
PUR022253	JETINOX 45/43 230V	8.0 Kg	1″	2.7 m ³ /h	43 m	0.60	
PUR022266	JETINOX 60/50 230V	8.6 Kg	1″	3.6 m³/h	50 m	0.55	
PUR022286	JETINOX 90/50 230V	13.0 Kg	1¼" x 1"	5.4 m³/h	50 m	0.90	



SURFACE MOUNTED PUMPS

Garden Pump - Stainless Steel

Complete with handle, on/off switch and 7 metre suction kit which has a filter and non-return valve included. For the outlet a 25mm hose connector is supplied. Stainless steel pump body. Impellor, diffuser and venturi system made from technopolymer. Clean water only with a maximum temperature of 50°C. Maximum suction height of 7 metres with footvalve. Can be used to draw water from wells, water butts etc. to operate sprinklers and waterguns for irrigation purposes.



CODE	ТҮРЕ	WEIGHT	PORTS	MAX. FLOW	MAX. HEAD	kW	PRICE
PUR022250	Pura/Jetcom Kit 230V	8.1 Kg	1"x1"	40 LPM	42 m	0.55	

Single Pump Units (Pressure Switch Operation c/w Accumulator Vessel) - Self Priming

Self priming single pump booster sets complete with pressure switch and mild steel accumulator vessel. Water supply is not always enough to supply the correct amount of water at a suitable pressure, so the best and most affordable solution to solve water deficiency problems is to install a pumped booster systems via a 'break' tank. These systems are specifically designed to boost the pressure of the water supply and deliver the correct amount of water to all outlets.

The pre-set pressure switch enables it to automatically start and stop the pump. The water inside the reservoir prevents the pump from restarting if a small amount of water is requested, protecting it from excessive wear and enabling users to save power.

These booster sets are supplied ready to be installed and used. Do not allow to run dry.

WATERPRESS

Cast iron pump body and motor bracket. Impellor, diffuser and venture system made from technopolymer. Clean water use only with a maximum temperature of 50°C.

SUPERINOX

Jet self-priming pumps. Stainless steel pump bodies. Impellor, diffuser and venture system made from technopolymer. Clean water only with a maximum temperature of 50°C.

WATERPRESS MULTI EVO-A

Horizontal multi-stage pump. Stainless steel pump body. Technopolymer impellors and diffuser. Carbon mechanical seal. Clean water only with no solids or abrasives and a maximum liquid temperature of 50°C.

We can also build any pump & vessel to your own specification - please give us a call to discuss your requirements.





CODE	ТҮРЕ	ACCUMULATOR VESSEL	WEIGHT	PORTS	MAX. FLOW	MAX. HEAD	kW	PRICE
PUR022463	WATERPRESS INOX 230V	25 Litre Mild Steel	15.0 Kg	1"x1"	3.3 m ³ /h	45 m	0.55	
PUR022460	WATERPRESS 70/50 230V	25 Litre Mild Steel	22.0 Kg	1"x1"	4.2 m ³ /h	45 m	1.00	
PUR022461	WATERPRESS 70/50+ 230V	60 Litre Mild Steel	32.0 Kg	1"x1"	4.2 m ³ /h	45 m	1.00	
PUR022462	SUPERINOX 60/50 230V	25 Litre Stainless Steel	11.0 Kg	1"x1"	3.3 m ³ /h	45 m	0.55	
PUR022464	SUPERINOX 90/50 230V	25 Litre Stainless Steel	12.0 Kg	1¼"x1"	4.5 m ³ /h	45 m	0.90	
PUR022495	W/P MULTI EVO-A 5-50M 230V	25 Litre Stainless Steel	13.0 Kg	1"x1"	6.1 m³/h	55 m	0.95	
PUR022500	W/P MULTI EVO-A 5-50M+ 230V	60 Litre Stainless Steel	23.0 Kg	1"x1"	6.1 m ³ /h	55 m	0.95	

sales: 01772 812484 fax: 01772 815417 sales@lssystems.co.uk www.lssystems.co.uk

LOWARA PUMPS

SV Series Vertical Multi-stage Centrifugal Pumps

- Flexibility of application
- Ease of maintenance
- High performance and silent running

Delivery up to 120 m³/hr - Head up to 330 m - Power up to 45 kW

Highly reliable and technologically advanced vertical multi-stage centrifugal pumps, capable of satisfying the needs of a wide variety of users.

Multi-stage vertical pumps with impellers, diffusers and outer sleeve entirely made of stainless steel, with pump body and upper head in cast iron in the standard versions. Various flange arrangements available on all models. The N versions are entirely made of stainless steel. Horizontal version are available on request as well as version with 4-pole motor.

Applications:

- Water supply and pressure boosting
- Water treatment
- · Light industry
- Irrigation and farming
- · Heating, ventilation and air-conditioning

5-10 m³/hr ~ from 2.5 bar to 10 bar and above

Lowara 5 SV & 10 SV

10-20 m³/hr ~ from 2.5 bar to 10 bar and above

Lowara 10 SV, 15 SV & 22 SV

32+ m³/hr ~ from 2.5 bar to 10 bar and above

- · Lowara 33 SV
- 45+ m³/hr ~ from 2.5 bar to 10 bar and above
- Lowara 46 SV

60+ m³/hr ~ from 2.5 bar to 10 bar and above

Lowara 66 SV

Energy Saving Variable Speed Control System Lowara Hydrovar® Series

Features

- Sizes available 0.37 to 525kW
- Wall mounted versions available
- · Shuts off at zero demand
- Mounted directly on any standard I.E.C. motors
- LCD display
- · Connects up to 4 pumps together
- Two different control inputs
- IP55 protection
- Anti-condensation heater

Hydrovar® Booster Sets

The Hydrovar allows up to 4 units to be interfaced together which offers the user ultimate flexibility. The pumps have an automatic cyclic changeover facility and in the case of failure the remaining pump/s take up the duty.

Hydrovar[®] is perfect for retro-fitting

The Hydrovar speed controller can be mounted or retro-fitted to any existing centrifugal pump manufacturer's unit, which has standard IEC motor.



A wide range of 4" to 12" Borehole Pumps

LOWARA

- GS Series for 4" wells
- Scuba Series for 5" wells
- Z6 Series (AISI 304) and
 ZN6 Series (AISI 316) for 6" wells
- Z8 Series (AISI 304) and ZR8 Series (Duplex) for 8" wells
- Z10-Z12 Series (AISI 304) and ZR10-ZR12 (Duplex) for wells up to 12"

CAPRARI PUMPS

D-M Series Submersible Pumps

- D Series pumps for drainage applications, castiron construction
- Free standing or pedestal mounting options
- Impellor options include vortex or single-channel with wide free passages available

Electric submersible pumps designed for raising drainage water. Thanks to their amenity and sturdiness they are used for draining out excavations even under the harshest working conditions. Ideal for conveying clean or dirty water containing mud and sand, draining tanks and reservoirs, irrigating gardens and allotments.

- **M Series pumps** for waste-water applications including heavy-duty models with cutter impellors
- Free standing or pedestal mounting options
- Impellor options include vortex or single-channel with wide free passages available

Electric submersible pumps for dirty water suited for conveying sewage water with solid matter in suspension. The models in the MAT series are equipped with a shredder for residential and industrial drainage systems. Designed for high heads and small flows, they are the ideal solution for conveying residential waste water in isolated areas far from the sewer mains.

caprari

pumping power



E4XP Series 4" Borehole Pumps and Motors

High-efficiency multistage submersible electric pumps available in a wide range so as to prefectly suit whatever duty point may be required. Compact and stainless, they combine power and reliability owing to their pioneering type of construction (three exclusive patents) and the quality of the materials used to make them. They are designed to withstand galvanic corrosion thanks to the DEFENDER* passivating system. The EASY-CHECK disassembly system allows them to be easily serviced. Machines conform to 2009/125/EC directive (EcoDesign - ErP).

- A wide range of 4" stainless steel borehole pumps suitable for pressure boosting, water supply, irrigation etc.
- Flows from 0.5 to 21 m³/hr with pressures up to 400 metres/head
- Solids handling up to 150 g/m³ with Energy series or up to 450 g/m³ with Desert Line series
- Over 40 models to choose from in Energy series alone
- Desert Line pumps available in 4" and 6" diameter
- 1-ph (230v), 3-ph (400v) and 3-ph (230v) motors available
- Additional cable can be pre-jointed to motor tails before despatch together with protection equipment

Larger Borehole Pumps, 6" to 22" diameter

Also available is a wide range of 6" and 8" borehole pumps and motors, including selected models from stock for immediate supply, for larger irrigation duties up to 140 m³/hr nominal. Please ask for details.



GRUNDFOS PUMPS

GRUNDFOS

Multistage Centrifugal Pumps Grundfos CR / CRI / CRN

LS Systems can offer solutions for all Pressure Boosting Applications

As Grundfos dealers LS Systems can draw from a wide range of pumps to offer the most suitable pump for your requirements.

From Single, Fixed Speed Pumps, to Variable Speed, Multi Pump Booster Sets we have the solution to your pumping needs.

5-10 m³/hr ~ available from 2.5 bar to 10 bar and above

· Grundfos CRI-5 & CRI-10

10-20 m³/hr ~ available from 2.5 bar to 10 bar and above

· Grundfos CRI-10; CRI-15 & CRI-20

32+ m³/hr ~ available from 2.5 bar to 10 bar and above

Grundfos CR-32

45+ m³/hr ~ available from 2.5 bar to 10 bar and above

Grundfos CR-45

60+ m³/hr ~ available from 2.5 bar to 10 bar and above

Grundfos CR-64



CRI Stainless steel AISI 304 throughout.



CRN High-grade AISI 316 stainless steel throughout.

CR

Stainless steel AISI 304 with a cast iron top and base.

Adding constant pressure to your system

Keeping a constant sufficient pressure to your irrigation system can be vital to secure uniform irrigation. If your pump is unable to supply constant pressure, caused by pressure loss in the pipe work, height differences or due to long or bended piping, the Grundfos CR range will secure exactly the flow and pressure that you require.

The Grundfos CR range is extremely reliable and energy-efficient and despite the long life of the pump, it is virtually maintenance free.

Features

- Reliability
- High efficiency
- Service-friendly
- Space-saving
- Suitable for slightly aggressive liquids

CRE / CRIE / CRNE

Multistage centrifugal pumps - electronically controlled

Grundfos electronically controlled pumps (E-pumps) are able to deliver intelligent speed control. We've integrated a frequency converter to automatically adjust pump speed to suit demand, which regulates pressure on the system.

Known as proportional pressure, this means you get only the pressure you need.

Rather than running at a fixed speed all the time, Grundfos E-pumps operate on a proportional pressure curve. This makes them far more efficient than standard three-speed pumps.



GRUNDFOS PUMPS

GRUNDFOS

Frequency Converters - speed control of pumpsGrundfos **CUE**

The Grundfos CUE range offers a variable speed control solution for pumps, with a user friendly interface and the functionality and build quality for which Grundfos is renowned.

CUE inverters are wall mounted, and can be retro-fitted to existing Grundfos pumps, or as part of a new installation on pumps where E-Pump integrated Inverter is not available.

Features & Benefits

- Energy saving the pump only works as hard as it needs to, so power consumption is reduced
- The pump will maintain a set pressure without surges
- Smooth operation and reduced stress on pipework
- Multiple CUE panels can be linked together for multi-pump installations
- For motor sizes up to 250kW 3-phase



DIAPHRAGM PUMPS

Hand Operated Diaphragm Pump

Suitable for a wide range of applications including acid transfer, drum emptying and tank drainage.

The diaphragm and seal components within the PVC body are available in alternative materials allowing a wide range of line media to be handled.

We recommend Viton seals in this pump for use with aggressive liquids such as acids - just ask for model type



CODE	DESCRIPTION	PRICE
GF999900007	Type 'C' Diaphragm Pump	

Flojet Duplex II Diaphragm Pumps

Duplex II typical applications:

- ATV mounted sprayers
- Horticultural spray equipment
- Chemical transfer/injection
- Portable water systems
- Parts washers



Flojet Duplex II Two Piston DEMAND Pump Flojet Duplex II Two Piston BYPASS Pump

Built-in pressure/demand switch. Permanent magnet electric motors. Self-priming up to 2.4 metres. Choice of Santoprene, Viton or Buna seals. Polypropylene pump housing. Fitted with built-in back-flow preventer.



Electric Motor Driven - ideal for spraying

Specifically designed for pumping all differing types of fluid including disinfectants, agri-horticultural chemicals, detergents and plain water.

230 Volts - 15 Bar - 6.9 lpm - MC8

Max. pressure: 6.9 lpm Max. flow: Regulator: 1 outlet 12 mm **Bypass:** Inlet: 16 mm Outlet: 10 mm 0.6 HP 4 pole, 71 frame Motor - IP55

Nylon body

Nitrile diaphragms



CODE	DESCRIPTION	PRICE
PUD7300117700	MC8 230v	

230 Volts - 15 Bar - 10.7 lpm - MC18

15 Bar Max. pressure: Max. flow: 10.7 lpm Regulator: 1 outlet Bypass: 12 mm Inlet: 16 mm Outlet: 10 mm 0.6 HP 4 pole, 71 frame Motor - IP55 Nylon body

Nitrile diaphragms



CODE	DESCRIPTION	PRICE
PUD7300118500	MC18 230v	

230 Volts - 30 Bar - 19.5 lpm - MP20

Max. pressure: 30 Bar Max. flow: 19.5 lpm Regulator: 2 outlets Bypass: 13 mm Inlet: 23 mm Outlet: 10 mm 2.0 HP 2 pole, 90 frame Motor - IP55 Gearbox: 1:5.09 Aluminium body

Nitrile diaphragms

CODE

PUD7300109800



		0	Typîcal/applica	ition			
CODE	TYPE	MAX. FLOW	SWITCH SETTING	BYPASS	CHECK VALVE	MAX. TEMP	
PLIDD3131V5011AP	Demand	6.1 lpm	// 1 Rar	Internal	Viton	60°C	Ī

COD	E	TYPE	MAX. FLOW	SWITCH SETTING	BYPASS	CHECK VALVE	MAX. TEMP	AMPS	VOLTAGE	PRICE
PUDD3131	V5011AR	Demand	6.1 lpm	4.1 Bar	Internal	Viton	60°C	7.0	12v DC	
PUDD3131	V1311AR	Bypass	5.7 lpm	N/A	3.4 Bar	Viton	60°C	7.0	12v DC	
PUDD3231	V1311AR	Bypass	5.7 lpm	N/A	3.4 Bar	Viton	60°C	3.5	24v DC	
PUDD3732H	11311ARL	Bypass	5.7 lpm	N/A	3.4 Bar	EPDM	60°C	0.4	240v AC	

INTERPUMP PLUNGER PUMPS

Typical Applications:

- Hot and cold pressure washers
- Engine driven pressure washers
- Forecourt pressure washers
- Pressure test equipment
- Industrial cleaning products
- Special duty applications

General Technical Details:

- Pressures up to 275 Bar
- Flow rates up to 21 lpmSpeeds from 1000 to 3400 rpm
- Stainless steel valve seats
- Nylon valve cages
- Nitrile/fabric water seals
- Ceramic plungers
- Oil bath crankcase lubrication
- Anodised aluminium housings
- Self-priming
- Water temperature up to 60°C
- Brass, S/Steel & aluminium manifolds



FE51 Series Triplex - Low Flow

- Flow rates up to 8 lpm
- Pressures up to 100 Bar
- 1/4" BSP female outlet
- ¾" BSP female inlet
- Nickel aluminium manifold
- Brass manifold*

CODE	TYPE	BAR	MAX. FLOW	HP	RPM	SHAFT	KG	(WxHxL) mm	PRICE
PUDFE5101	FE5101	100	1 lpm	0.28	1450	24mm	5.2	177x175x130	
PUDFE5102	FE5102	100	2 lpm	0.57	1450	24mm	5.2	177x175x130	
PUDFE5104	FE5104	100	4 lpm	1.07	1450	24mm	5.2	177x175x130	
PUDFE5108	FE5108	100	8 lpm	2.11	1450	24mm	5.2	177x175x130	

50 Series Triplex - Male Shaft

- Flow rates up to 16.6 lpm
- Pressures up to 172 Bar
- 1/2" BSP female inlet
- 3/8" BSP female outlet

Brass manifold



CODE	TYPE	BAR	MAX. FLOW	HP	RPM	SHAFT	KG	(WxHxL) mm	PRICE
PUDWW141	WW141	140	11.5 lpm	4.0	2800	24mm	8.5	238x211x138	
PUDWW161	WW161	160	14 lpm	5.5	2800	24mm	8.5	238x211x138	
PUDWW935	WW935	172	13.2 lpm	6.0	3400	24mm	8.5	238x211x138	
PUDWW944	WW944	172	16.6 lpm	7.5	3400	24mm	8.5	238x211x138	

AGRICULTURAL PLUNGER PUMPS

Typical Applications:

- Land drain jetting equipment
- Agricultural washing equipment
- Crop spraying equipment
- High volume wash downVehicle wash booms
- Direct or belt & pulley drive

General Technical Details:

- Pressures up to 60 Bar
- Flow rates up to 170 lpm
- Speeds from 550 to 650 rpm
- Stainless steel valve seats
- Ceramic plungers
- Nitrile/fabric water seals
- Heavy-duty crank bearings
- Oil bath crankcase lubrication
- Self-priming capability
- Water temperature up to 60°C
- Brass & aluminium manifolds

T75 Series Duplex

- Built-in air filled pressure accumulator
- ¾" BSP female inlet
- 3%" BSP female outlet
- Nickel aluminium manifold
- Twin shaft 1 ¾" MPTO x 35mm male

CODE	TYPE	BAR	MAX. FLOW	HP	RPM	KG	(WxHxL) mm	PRICE
PUDT33	T33	30	30 lpm	2.5	650	12.5	304x294x185	

T69 Series Triplex

- Flow rates up to 50 lpm
- Pressures up to 50 Bar
- ¾" BSP female inlet
 ¾" BSP female outlet
- Nickel aluminium manifold
- Twin shaft 1 ¾" MPTO x 35mm male

CODE	TYPE	BAR	MAX. FLOW	HP	RPM	KG	(WxHxL) mm	PRICE
PUDT44	T44	50	40 lpm	5.2	550	16.5	328x354x156	

Electric Driven Pump Units

- Flow rates up to 40 lpm
- Pressures up to 50 Bar
- Interpump reduction gearbox
- ¾" BSP female inlet
- 3/8" BSP female outlet
 Max. temp 60°C
- Motor protection IP55
 Dio-cast aluminium motor
- Die-cast aluminium motors
- No unloader valve, switch or filter fitted

CODE	TYPE	BAR	MAX. FLOW	VOLTAGE	НР	MOTOR RPM	PUMP RPM	KG	(WxHxL) mm	PRICE
PUDT33E	T33E	30	30 lpm	240	3.0	1450	600	40	675x305x260	



Terms & Conditions

In these terms and conditions the "Company" means LS Systems Ltd, the "Customer" means the person, firm, or company who purchases Goods from the Company, the "Goods" means any goods agreed in the contract to be supplied by the Company to the Customer, the "Contract" means any contract between the Company and the Customer for the sale and purchase of the Goods which incorporates these terms and conditions.

a) No terms, conditions, warranties, reservations, or stipulations by the Customer and no

- course of dealings shall annul, vary or add to any of these terms and conditions except where expressly consented to by the Company in writing.

 No relaxation, forbearance, delay or indulgence of the Company in enforcing any of its
- rights shall affect prejudice or restrict such rights and any waiver of the Company in respect of any breach of contract by the Customer shall not operate as a waiver of any subsequent or continuing breach.
- These terms and conditions and any Contract are governed by English Law and the Company and the Customer agree to submit to exclusive jurisdiction of the courts of c) England and Wales.
- All samples, descriptive matter, specifications and advertising issued by the Company and any descriptions or illustrations contained in the Company's buyers guide, brochures or websites are issued or published for the sole purpose of giving an d) approximate idea of the goods described therein and shall not form part of the Contract between the Company and the Buyer.
- For comprehensive terms and conditions relating to any installed project, site or service work please refer to our Sales Office on 01772 812484.

PRICE.

- All prices quoted by the Company in the buyers quide, brochures or websites are correct at the time of going to print.

 All prices quoted by the Company in any written quotation are valid for 30 days
- provided that the Company has not previously withdrawn it. The Company does endeavour to maintain these prices, however, due to factors beyond the Company's control e.g. currency fluctuations, raw materials increase etc. the Company reserves
- the right to alter the price of any Goods without prior notice.
 c) The Company reserves the right to terminate the Contract (without any liability to the Company whatsoever or howsoever arising) if the Customer is not willing to pay an increase in the price of Goods.
- All prices exclude V.A.T. which shall be charged at the rate applicable at the date of
- The price of carriage of the Goods shall be borne by the Customer. e)

PAYMENT OF ACCOUNTS.

- All transactions over the trade counter not made by credit account customers are payable at the point of sale.
- Payment for credit account customers is strictly twenty-eight days from the date of
- Time for payment shall be of the essence.
- If the Customer fails to pay to the Company any sum by the due date then the Customer shall be liable to pay interest to the Company on such sum from the due date of payment at the rate of 2% above the base lending rate from time to time of the Company's bank accruing on a daily basis until payment is made and/or (at the Company's sole discretion) the Company shall be entitled to claim interest under the Late Payment of Commercial Debts (interest) Act 1998 not withstanding that such claim or claims to interest and/or to surcharges for non-payment have been waived by the Company in the past.
- If the account remains unpaid after twenty-eight days then the Company reserves the right to sue for damages and to withdraw all credit facilities. If any further Goods are supplied they may be on a cash with order basis.
- All costs including legal fees incurred by the Company in collection of overdue accounts or in enforcing repossession as hereinafter provided shall be payable by the f)
- The Company reserves the right to re-impose without notice any discounts that have been allowed of payment is not made in full by the due date.
- If Goods are agreed to be paid by instalments and a payment is missed then the total h)
- amount payable for the Goods shall become immediately due and payable.
 The Customer shall make all payments due to the Company without any deduction whether by of set-off, counterclaim, discount or abatement or otherwise

DELIVERY.

- Time is not of the essence for delivery, and any delivery dates are estimates only.
- Any goods dispatched in error shall be returned in good condition to the Company by
- the Customer at which time the Company shall credit the Customer in full.

 The Customer shall advise the Company of any non-delivery of whole or part of the
- consignment within 3 days of the date of delivery.

 If the Customer does not return the Goods within seven days they shall have been deemed to have accepted the Goods. Where any Goods are returned to the Company in accordance with the time limit specified in this clause 4, the Goods returned must be accompanied by a note to explain the reason for return for consideration by the
- All deliveries shall be made to the address specified at the time of order. If for any reason the Customer fails to accept the Goods at the address or date specified by the Company then the Company reserves the right to (i) store the Goods, at the Customer's sole expense, until such time that the Goods are either collected or delivered or (ii) (at the Company's sole discretion) dispose of the Goods. The return of correctly dispatched Goods of saleable quality shall be subjected to a
- f) 10% restocking charge plus any delivery charges. The minimum restocking charge is £10.00 plus any delivery charges.
- g)
- Orders for non-stocked, special or custom-built assemblies cannot be terminated by the Customer once the order has been accepted by the Company.

 Subject to the provision of clause 6, the Customer shall not be entitled to terminate the Contract or reject the Goods by reason of any minor defects on quality, number, size, colour or finish of the Goods.

 Where deliveries are by instalments, any defects found in one instalment delivered
- i)
- shall not entitle the Customer to reject future instalments.
 Where part deliveries are agreed with the Customer, additional delivery charges will be made by the Company for all additional deliveries.

- The Customer warrants and undertakes that any pesticides sold by the Company will be used by competent and qualified end users and that the Customer has the necessary skill and technical knowledge to comply with the provisions of the Food and Environment protection Act 1985 and any other relevant legislation, statutes, regulations or other industry standards in the use of pesticides.
- No pesticide will be left with a Customer without receiving a signed delivery note. All pesticides are sold on the agreement that they are used strictly according to the latest approved recommendations for that product.
 - When using pesticides always read the label carefully before use.

LIABILITY.

The Company is not a manufacturing company but merely acts as a reseller and is therefore not responsible for the manufacture of any goods sold

- All warranties, conditions and other terms implied by statute or common law are subject to clause 6 (c), to the fullest extent permitted by law excluded from these
- terms and conditions and any contract.

 Nothing in these terms and conditions or the Contract excludes or limits the liability of the Company for death or personal injury caused by the Company's negligence, or under section 2(3) of the Consumer Protection Act 1987 or for any matter which it would be illegal for the Company to exclude or attempt to exclude its liability, or for fraud or fraudulent misrepresentations.

subject to clause 6(b) and 6(c):
d(i) The Company's total liability in contract, tort (including negligence or breach of statutory duty, misrepresentation, restitution or otherwise arising in connection with the performance or contemplated performance by the Company of the Contract shall be limited to either the supply of replacement Goods, or the repair of the Goods (to the limit of the invoice price) or reimbursement not exceeding the invoice price for the Goods; and

ing the invoice price for the doods; and d(ii) the Company shall not be liable to the Customer for any pure economic loss, loss of profit, loss of business, depletion of goodwill or otherwise, in each case whether direct or indirect consequential, or any claims for consequential compensation whatsoever (howsoever caused) which arising out of or in connection with these terms of business or the Contract include late or non delivery of the

- It is the responsibility of the Customer to check the suitability and condition of all Goods supplied by the Company before use.

 Allegedly faulty goods must be returned to us for inspection within seven days
- Nothing in these terms or conditions shall affect the statutory rights of a Customer who deals as a "Consumer" as defined in the Unfair Contract Terms Act 1977.

SUB CONTRACT.

The Company reserves the right to sub-contract part or all of any Contract with any Customer without prior notice to the Customer.

CONTRACT RIGHTS OF THIRD PARTIES.

It is agreed that the Contract Rights of Third Parties Act 1999 shall not apply to the Contract and no person, other than the Company and/or Customer shall be entitled to enforce the

FORCE MAJEURE.

The Company shall have no liability to the Customer under the Contract if it is prevented in performing its obligations under the Contract or from carrying its business by acts, events omissions, accidents beyond the Company's reasonable control, including but not limited to strikes, industrial disputes, lock-outs, accidents, war, acts of Gods, civil commotion, malicious damage, fire, reductions in or unavailability of power at manufacturing plant or shortage or unavailability of raw materials from normal sources or routes of supply or default of any sub contractor.

10. TITLE OF GOODS.

- The goods shall remain the property of the Company until it is paid for in full by the Customer or until such payment The Customer shall (i) hold the Goods and all items incorporating the Goods as bailee on behalf of and in

 - a fiduciary capacity for the Company; and
 (ii) store the Goods (at no cost to the Company) separately from all other Goods of the Customer or any third party and in such a way as to be identifiable as the
 - property of The Company; and (iii) not destroy, deface or obscure any identifying mark or packaging on or relating to the Goods: and
 - the Goods; and (iv) maintain the Goods in satisfactory condition and keep them insured for their full price against all risks to the reasonable satisfaction of the Company.
- Not withstanding anything contained in this Clause 10 the Customer shall be entitled to sell the goods to a third party in the normal course of business and to deliver them on the condition that as long as The Customer has not fully discharged all monies due to The Company the Customer shall be obliged to account to the Company with the proceeds of sale of the Goods which proceeds shall be kept separate and identifiable from The Customer sharping. identifiable from The Customer's own monies.
- In the event of the Customer not fully discharging all monies due to the Company, or if the Customer should become bankrupt or, in the case of a Company, become insolvent, or in the opinion of the Company the Company believes that the Customer is about to suffer bankruptcy, insolvency or any other similar or analogous action, or the Customer ceases or threatens to cease trading then the Company shall be entitled to immediately, after giving notice of their intention to repossess, to enter upon the premises of the Customer with such transport as may be necessary and repossess and Goods to which they have title hereunder.

11. CUSTOMER INSURANCE.

- Risk of damage to the Goods supplied passes to the Customer on dispatch from the Company's premises.
- Pending payment of the full price of the Goods the Customer shall be required to b) keep the Goods insured for their full price against all risks to the reasonable satisfaction of the Company.

 The Customer declares that it holds any insurance proceeds on trust to pay the same
- c) to the Company up to the amount of the invoice price for the Goods supplied.

12. CREDIT FACILITIES.

It is necessary for all new customers wishing to open a credit account to supply suitable credit references on the Account Application Form found overleaf.

13. DATA PROTECTION.

Personal information about the Customer may be stored safely and securely by the Company and used within the Company for marketing and accounting purposes. The Company may also share information about Customer accounts with other lenders through credit reference agencies and directly with other traders. This information is used only to make credit granting decisions or for fraud prevention. When Customers apply for credit the Company may consult credit reference agencies, who may record the search. The Company reserves the right to refuse applications. If the Customer has severe problems with repayments the Company may pass the Customer's name to a debt collection agency.

14. WARRANTY.

Manufacturer's guarantees and warranties will only be valid if products are installed and used in accordance with Manufacturers instructions.

15. SERVICE.

All equipment requiring service for guarantee claims or otherwise, must be returned to the Company at The Customer's expense. A return carriage charge will be made after the work is complete. If "on site" work is required please contact our sales office for a listing of our current service/call out charge rates.